

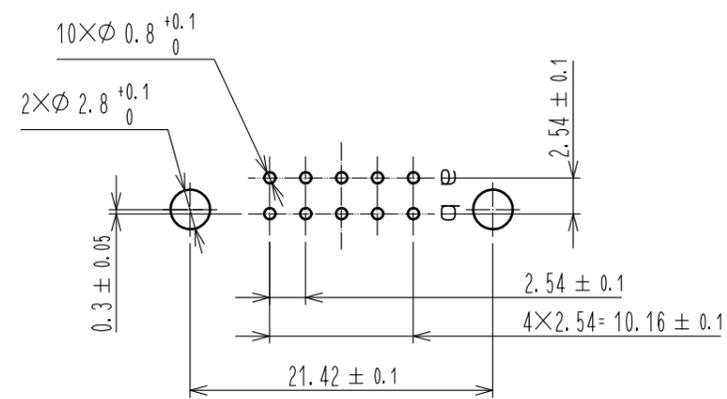
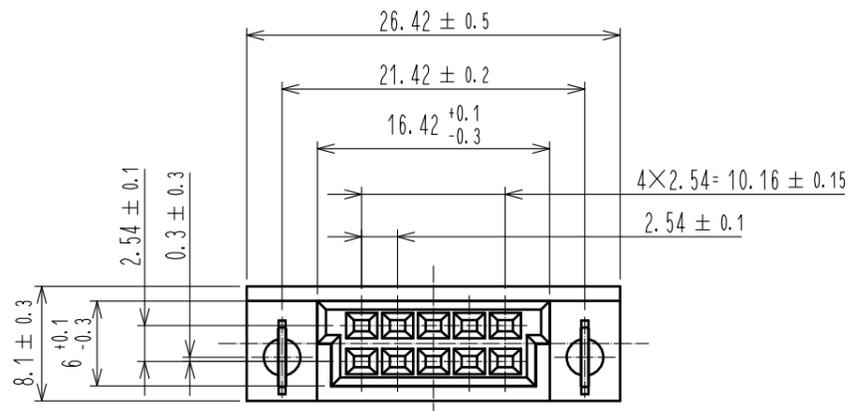
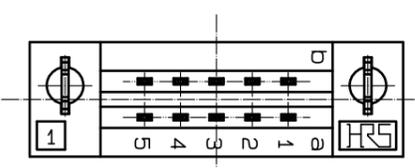


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

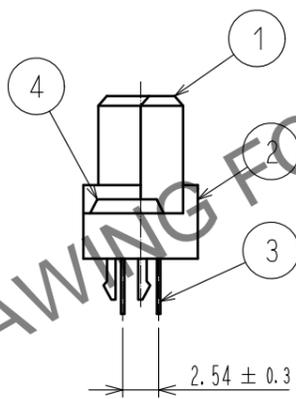

Recommended PC board hole pattern(t=1.6 ± 0.1)

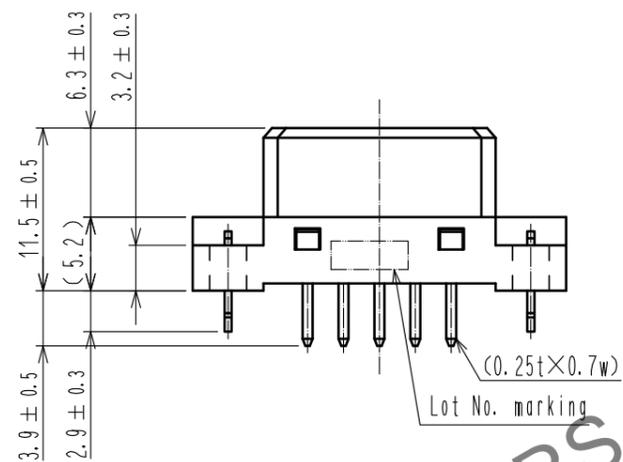

HRS DRAWING FOR REFERENCE

△ Note 1 UL(File No. E52653)



1, 2	PBT	BEIGE, UL94V-0	4	PHOSPHOR BRONZE	Ni1 μm+Sn1 μm		
			3	COPPER ALLOY	CONTACT AREA : Ni1 μm+Au0.1 μm DIP AREA : Ni1 μm+Sn1 μm		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00017716	DESIGNED YU. NAKADA	CHECKED HT. YAMAGUCHI	DATE 20230329
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA 20141028	DRAWING NO. EDC-019830-71-02				
		CHECKED : HT. YAMAGUCHI 20141028	PART NO. PCN12E-10S-2.54DSA(71)				
		DESIGNED : KJ. NISHIWAKI 20141028	CODE NO. CL0583-2064-2-71				
		DRAWN : KN. YAMAZAKI 20141028			△ 1/1		