

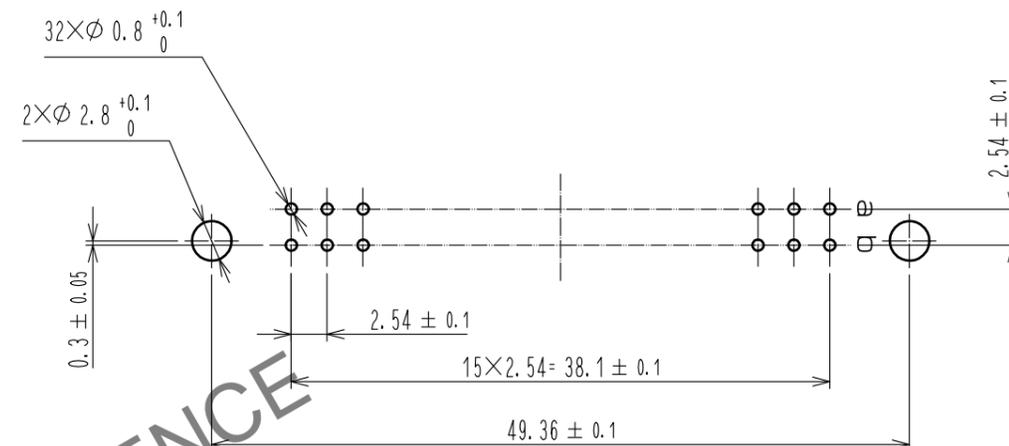
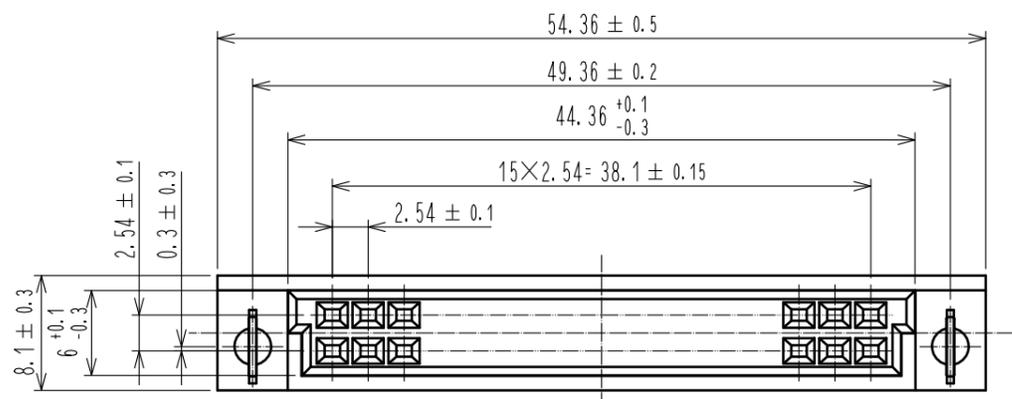



Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

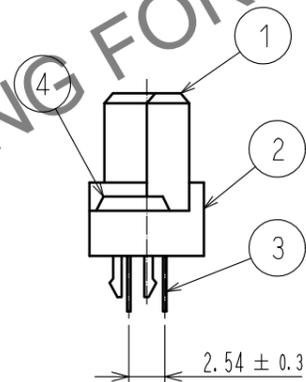

Recommended PC board hole pattern(t=1.6 ± 0.1)

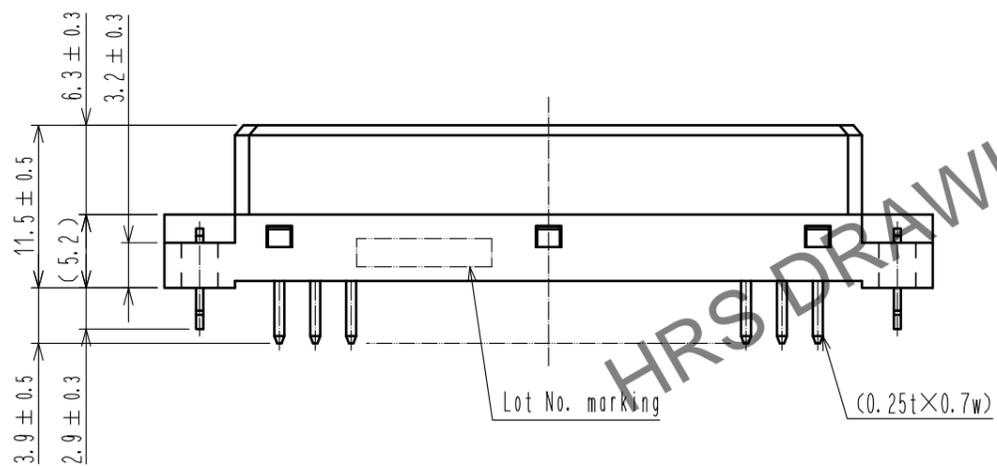

Note 1 UL(File No. E52653)

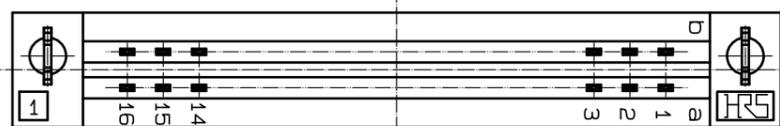

1, 2	PBT	BEIGE, UL94V-0	4	PHOSPHOR BRONZE	Ni1 μm+Sn1 μm
			3	COPPER ALLOY	CONTACT AREA : Ni1 μm+Au0.1 μm DIP AREA : Ni1 μm+Sn1 μm
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS	mm	SCALE	2 : 1	COUNT	1
		DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		DIS-F-00017716	YU. NAKADA	HT. YAMAGUCHI	20230329
APPROVED : HS. OKAWA		20120524	DRAWING NO. EDC-019833-71-01		
CHECKED : HT. YAMAGUCHI		20120524	PART NO. PCN12E-32S-2.54DSA(71)		
DESIGNED : KJ. NISHIWAKI		20120524	CODE NO. CL0583-2067-0-71		
DRAWN : CR. TAKESHIMA		20120523	1/1		