


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

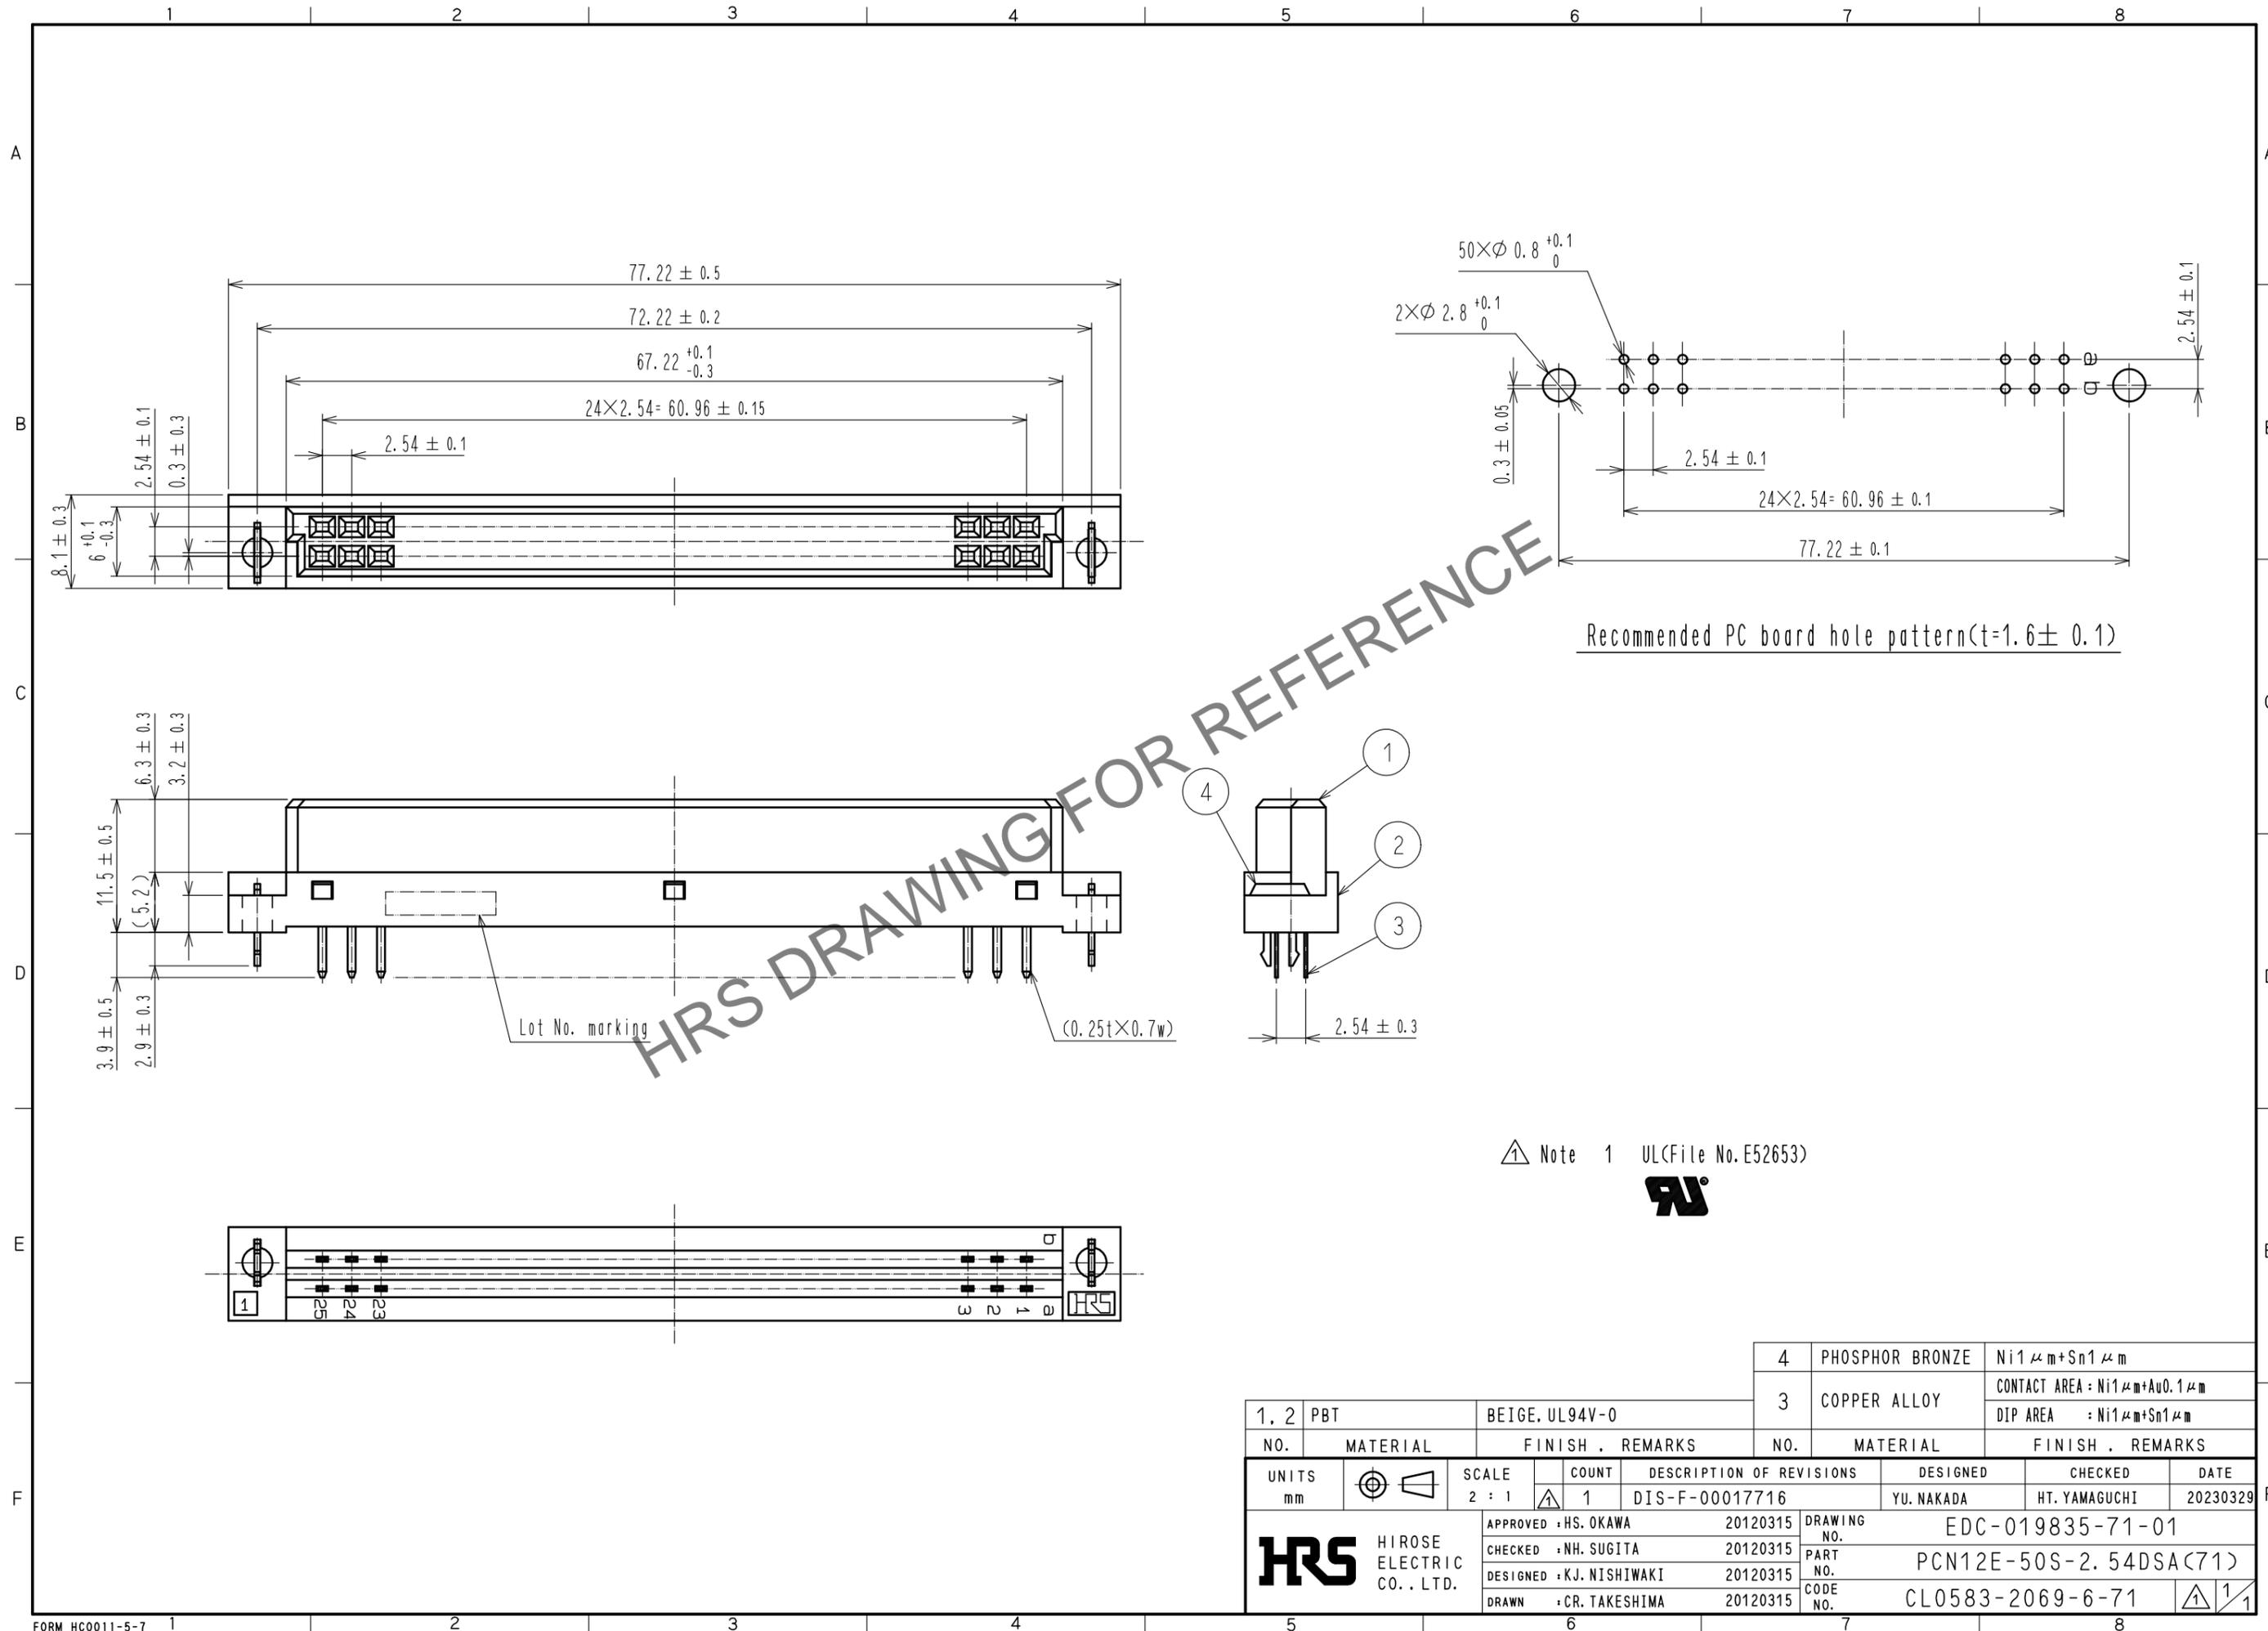

Recommended PC board hole pattern(t=1.6± 0.1)

Note 1 UL(File No. E52653)

1, 2	PBT	BEIGE, UL94V-0	4	PHOSPHOR BRONZE	Ni1 μm+Sn1 μm
			3	COPPER ALLOY	CONTACT AREA : Ni1 μm+Au0.1 μm DIP AREA : Ni1 μm+Sn1 μm
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	
mm		2 : 1	1	DIS-F-00017716	
		APPROVED : HS. OKAWA	20120315	DESIGNED	YU. NAKADA
		CHECKED : NH. SUGITA	20120315	CHECKED	HT. YAMAGUCHI
		DESIGNED : KJ. NISHIWAKI	20120315	DATE	20230329
		DRAWN : CR. TAKESHIMA	20120315	DRAWING NO. EDC-019835-71-01	
				PART NO. PCN12E-50S-2.54DSA(71)	
				CODE NO. CL0583-2069-6-71	