

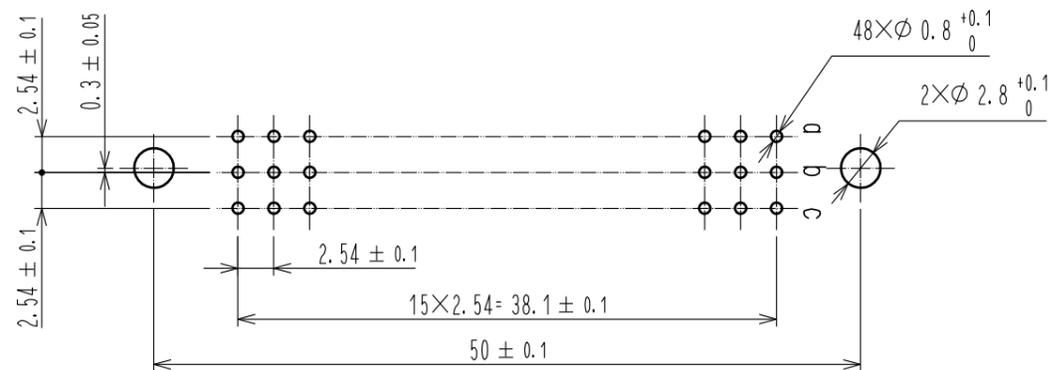
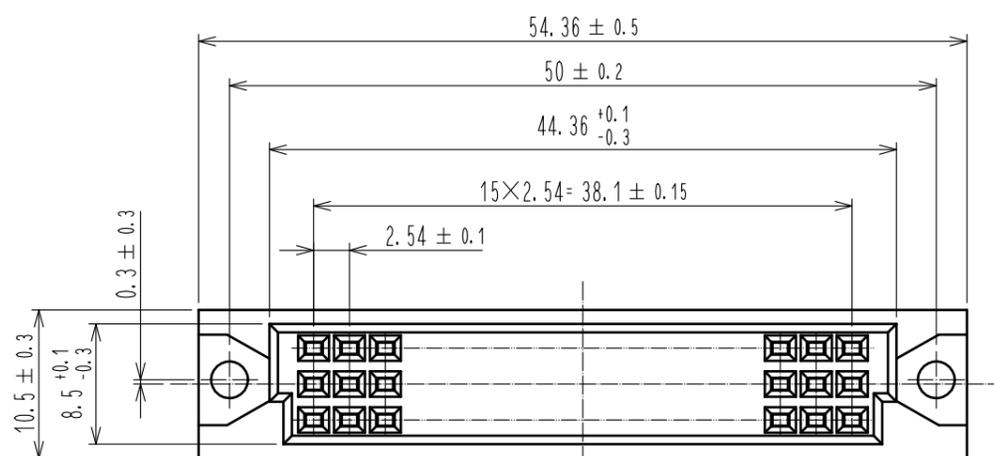


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

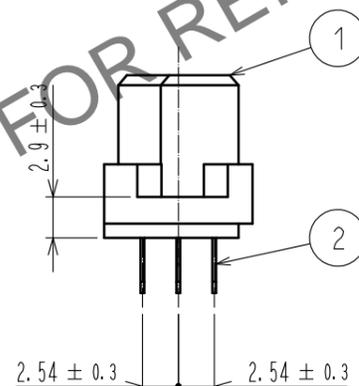


Recommended P.C.B hole pattern(t=1.6 ± 0.1)

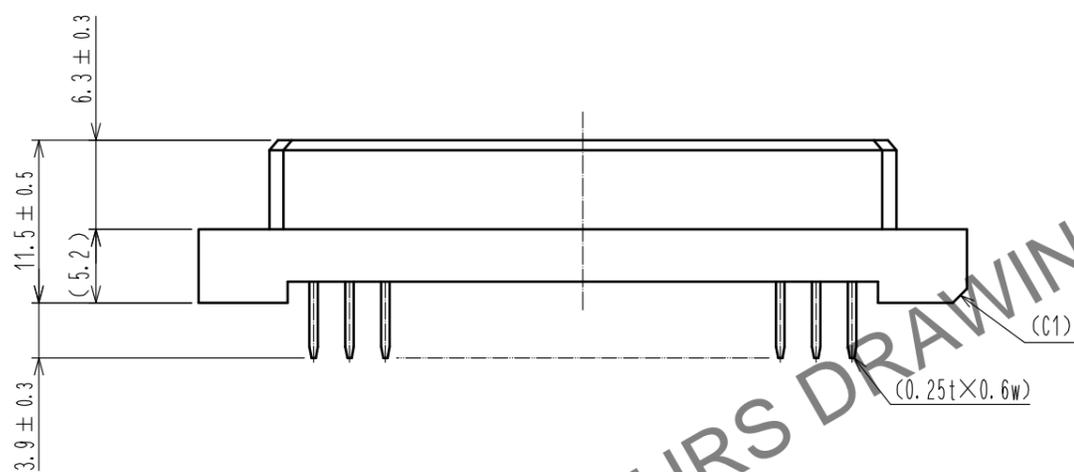

HRS DRAWING FOR REFERENCE

Lot No. marking

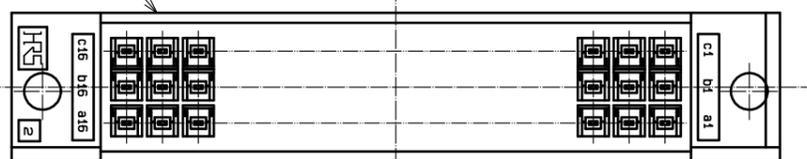

Note 1 UL(File No. E52653)



1	PBT	BEIGE UL94V-0	2	COPPER ALLOY	CONTACT AREA : Ni1 μm+Au0.1 μm DIP AREA : Ni1 μm+Sn2 μm		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-F-00017850	DESIGNED YU. NAKADA	CHECKED HT. YAMAGUCHI	DATE 20230331
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA 20080220	DRAWING NO. EDC-020601-71-01		PART NO. PCN13-48S-2.54DSA(71)		CODE NO. CL0583-3010-9-71
		CHECKED : SI. TOMIOKA 20080219					
		DESIGNED : NH. SUGITA 20080219					
		DRAWN : NN. ONDA 20080219					1/1