

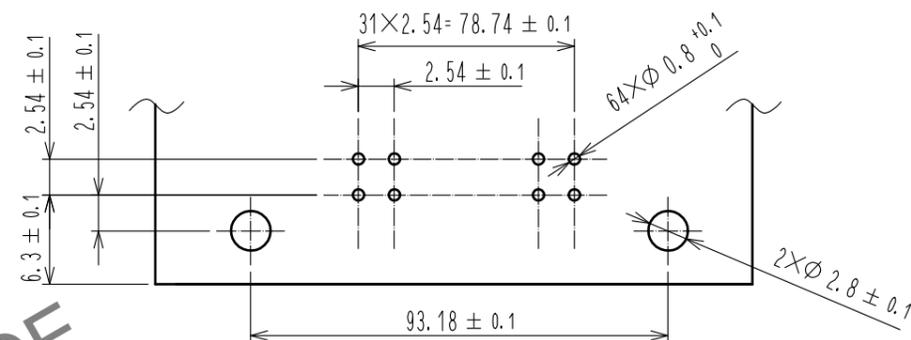
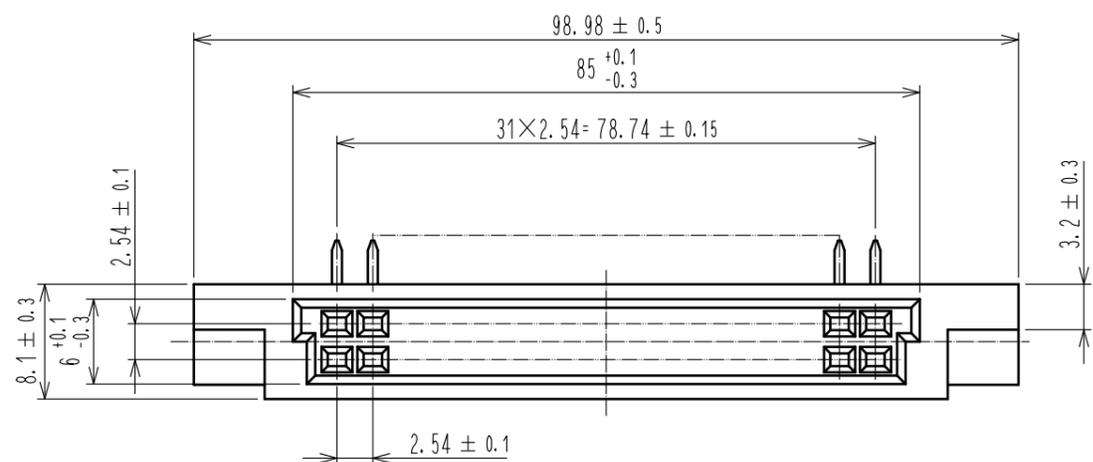
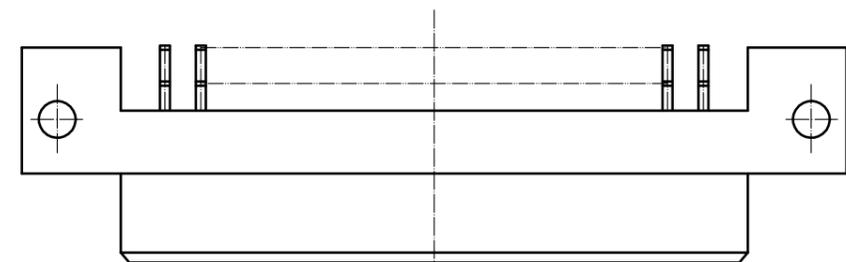


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

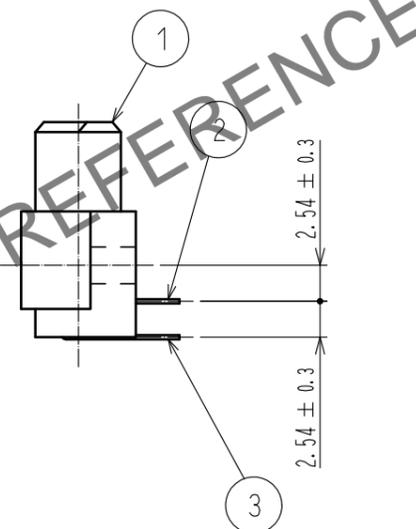

Recommended P.C.B hole pattern

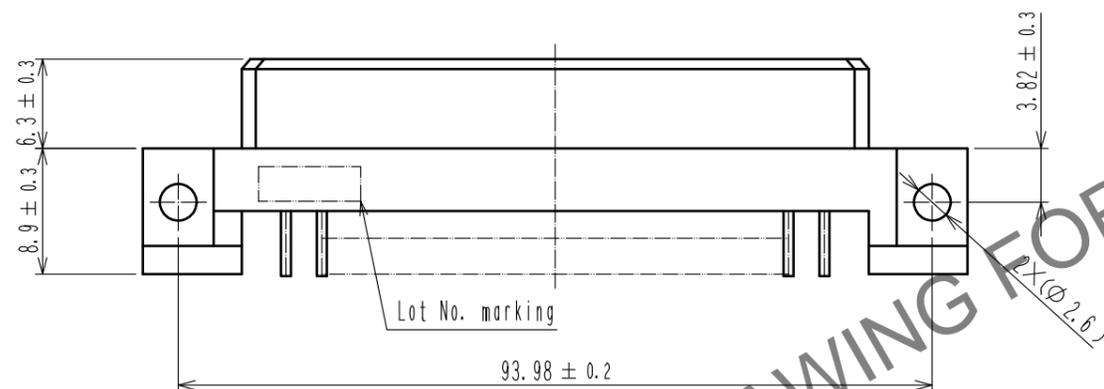

HRS DRAWING FOR REFERENCE

△ Note 1 UL(File No. E52653)



△ Change drawing frame format.

1	PBT	BEIGE UL94V-0	2, 3	COPPER ALLOY	CONTACT AREA : Ni1μm+Au0.1μm DIP AREA : Ni1μm+Sn2μm
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-F-00017850	DESIGNED YU. NAKADA
					CHECKED HT. YAMAGUCHI
					DATE 20230331
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA	20060510	DRAWING NO. EDC-020273-71-01	
		CHECKED : SI. TOMIOKA	20060510	PART NO. PCN13-64S-2.54DS(71)	
		DESIGNED : HM. SAITO	20060510	CODE NO. CL0583-3037-5-71	
		DRAWN : HM. SAITO	20060510	1/1	