
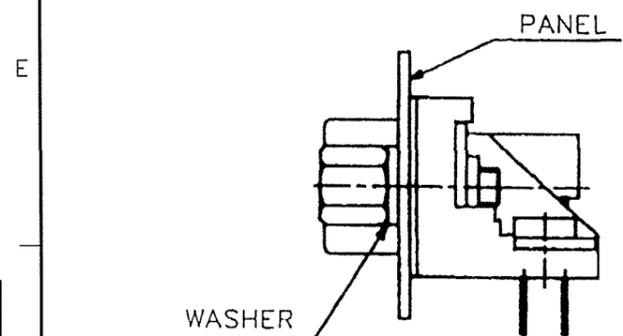
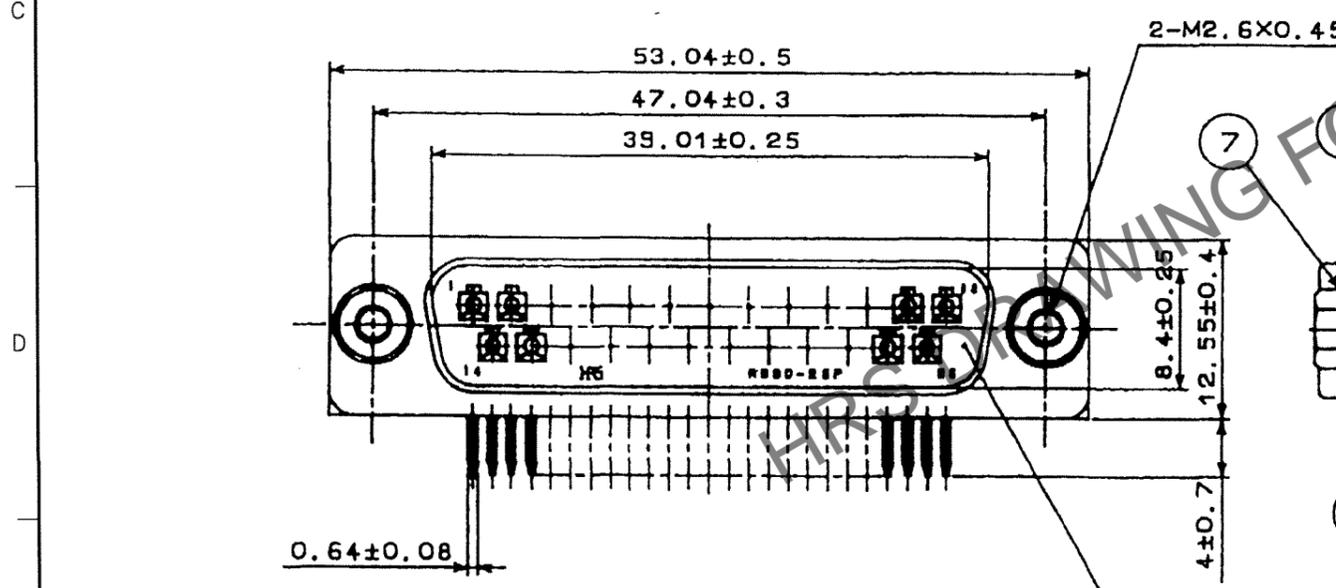



Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
5	DIS-E-001213	Y.S	Y.E	07.02.22					

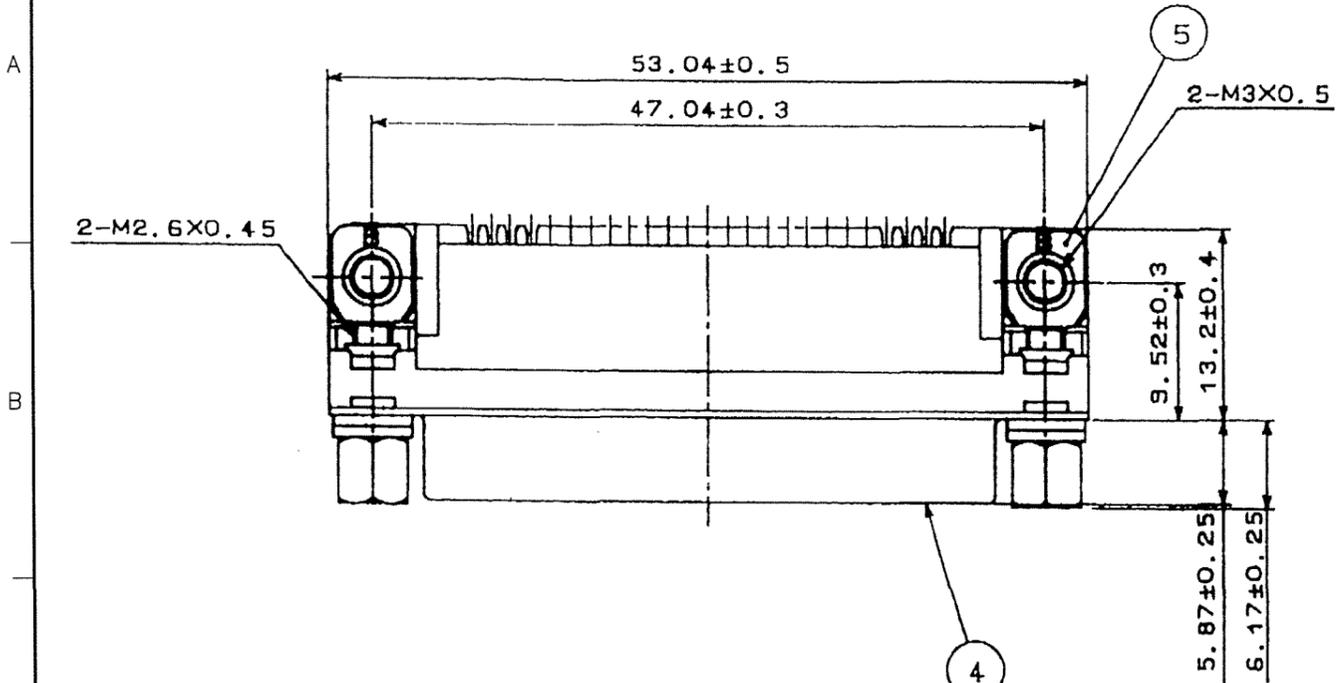

PATTERN OF MOUNTING CONNECTOR ON PCB

REMOVE ONE WASHER FOR 0.8-1.2 OF PANEL THICKNESS. REMOVE TWO WASHERS FOR 1.6 OF PANEL THICKNESS.

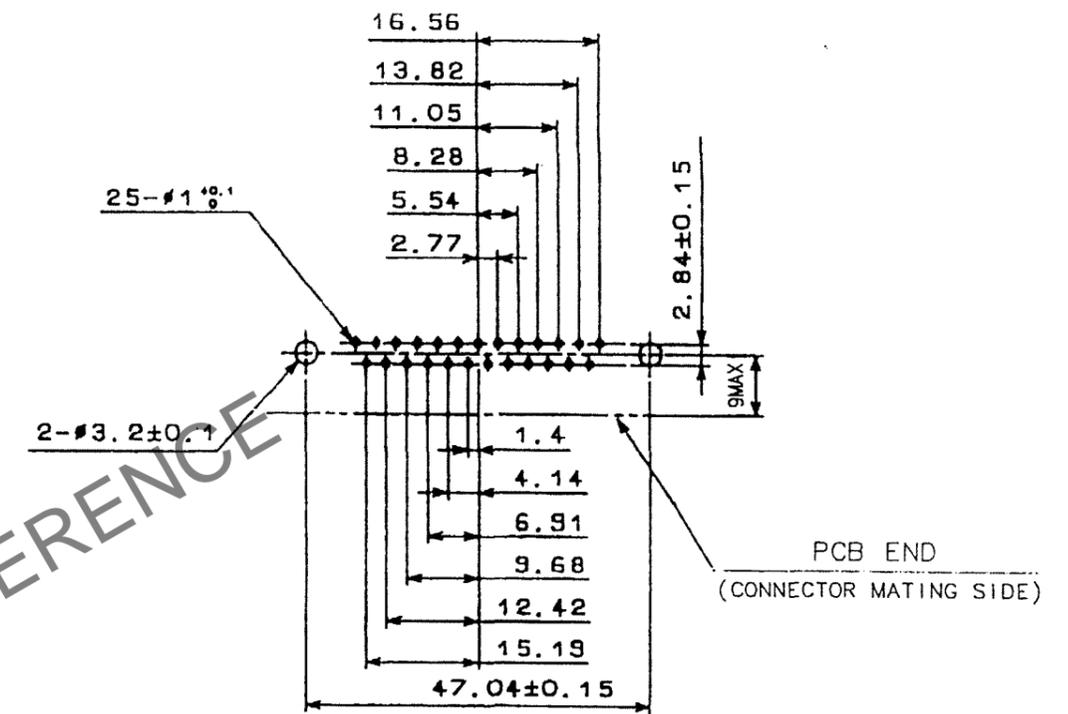

NOTE. PLEASE KEEP THE TOLERANCE TO LESS THAN ±0.1 FOR THE DIMENSIONS WITHOUT TOLERANCE.

RECOMMENDED PCB END HOLE PATTERN (SCALE 1:1)

4	STEEL	NICKEL PLATING 1μm UNDER: COPPER PLATING 5μm	7	STEEL	NICKEL PLATING 2μm UNDER: COPPER PLATING 1μm
3	PBT	UL94V-0(BLACK)	6	STEEL	NICKEL PLATING 2μm UNDER: COPPER PLATING 3μm
1.2	PHOSPHOR BRONZE	DIP: GOLD PLATING 0.03μm UNDER: NICKEL PLATING 2μm	5	STEEL	NICKEL PLATING 2μm UNDER: COPPER PLATING 1μm
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN T.KAMEYA 03.07.31	DESIGNED T.KAMEYA 03.07.31	CHECKED Y.ENAMI 03.08.04	APPROVED H.MIWA 03.08.05	RELEASED .
----------------------	-------------------------------	----------------------------------	--------------------------------	--------------------------------	---------------

SCALE 2 : 1	DRAWING NO. EDC3-021085-02	PART NO. RDBD-25P-LNA(55)
UNITS mm	HRS HIROSE ELECTRIC CO., LTD	CODE NO. CL211-0369-0-55

TO
Q