


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

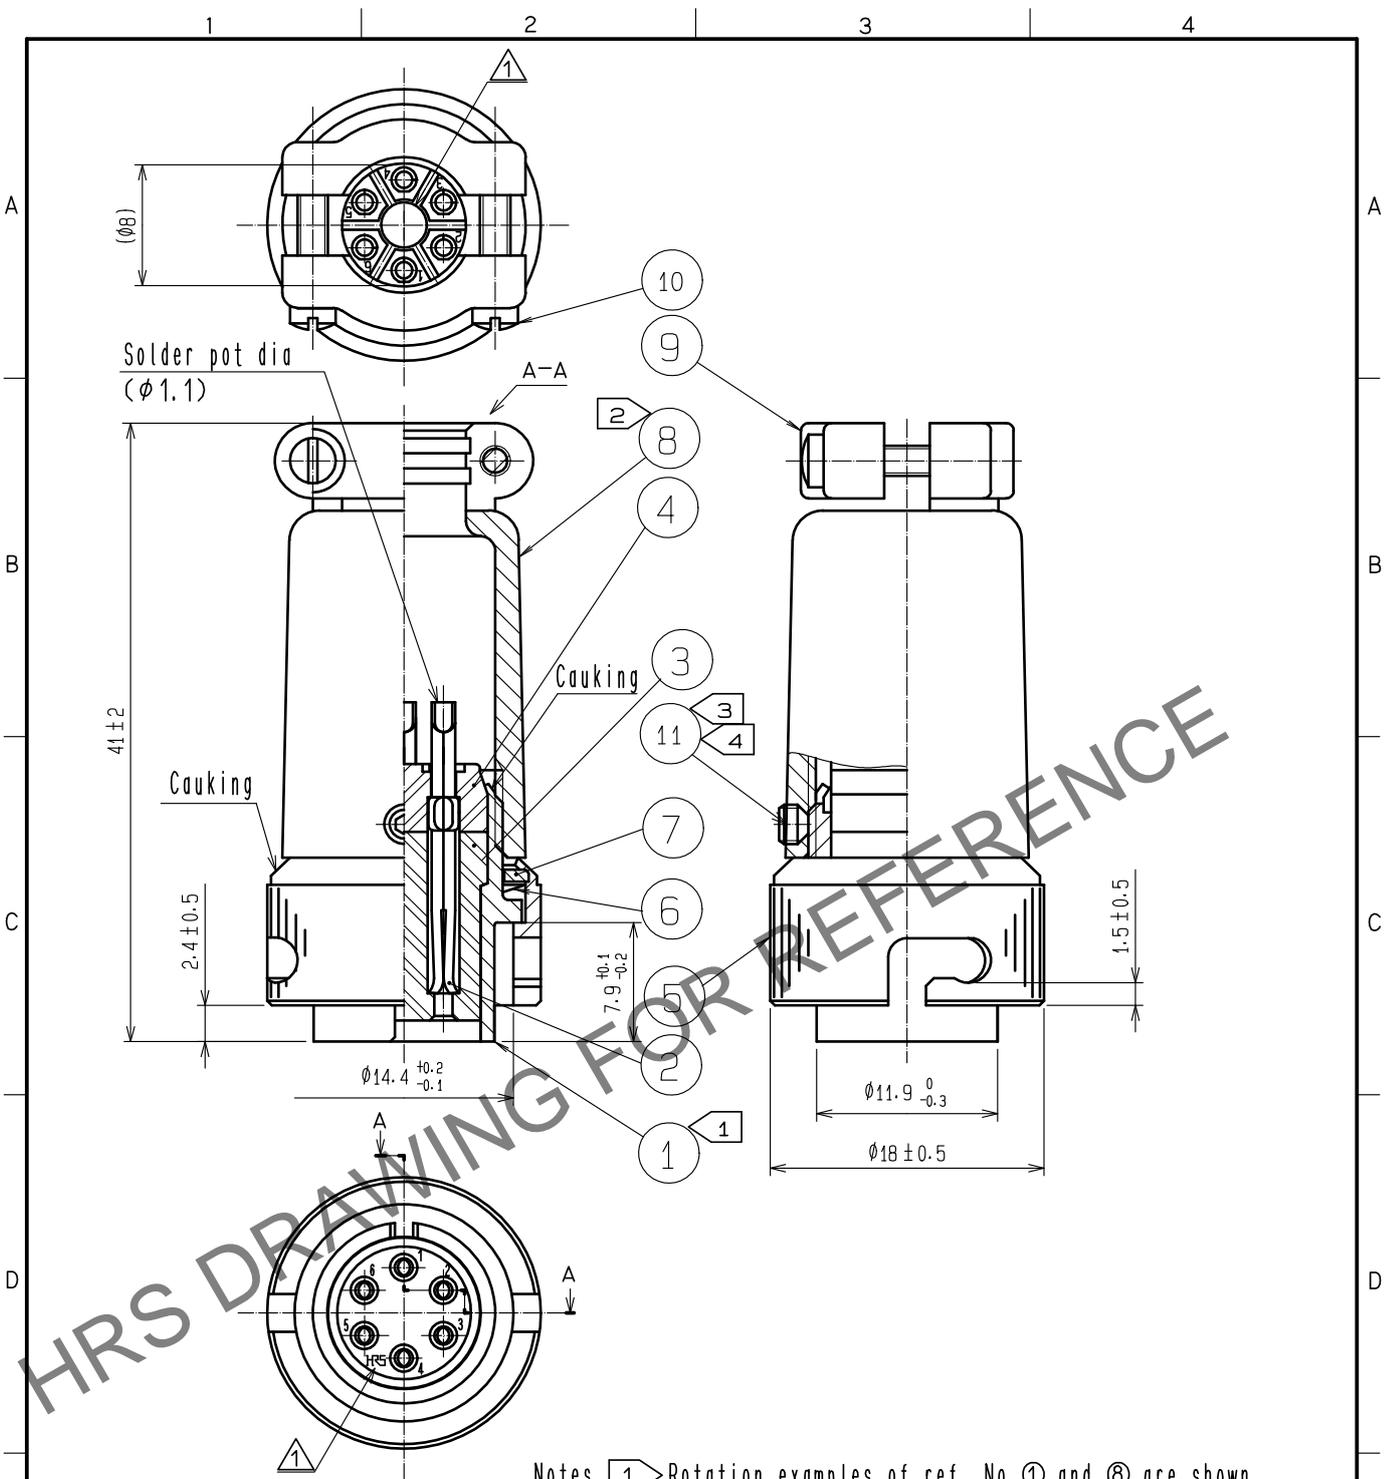

- Notes
- ① Rotation examples of ref. No. ① and ② are shown.
 - ② The recommended torque of ref. No. ⑧ : 2 to 3 N · m.
 - ③ The recommended torque of ref. No. ⑩ : 0.3 to 0.4 N · m.
 - ④ Bolting tool for ref. No. ⑩ : PB205/1.27 (CL150-0066-3)

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
5	BRASS	MATTE FINISH NICKEL PLATING	10	BRASS	NICKEL PLATING
4	PPS	(BLACK) UL94V-0	9	ZINC ALLOY	MATTE FINISH NICKEL PLATING
3	PPS	(BLACK) UL94V-0	8	ZINC ALLOY	MATTE FINISH NICKEL PLATING
2	COPPER ALLOY	SILVER PLATING 5 μm min.	7	BRASS	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	6	BERYLLIUM COPPER	NICKEL PLATING
			11	STEEL	NICKEL PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	2	DIS-C-00000559	KN. IKEHARA	HY. KOBAYASHI	15.11.02

HRS HIROSE ELECTRIC CO., LTD.	APPROVED	·HY. KOBAYASHI	15.09.10	DRAWING NO. EDC-112329-81-00 PART NO. RM12BPE-6S(81) CODE NO. CL109-0427-0-81
	CHECKED	·HY. KOBAYASHI	15.09.10	
	DESIGNED	·KN. IKEHARA	15.09.10	
	DRAWN	·KN. IKEHARA	15.09.10	