
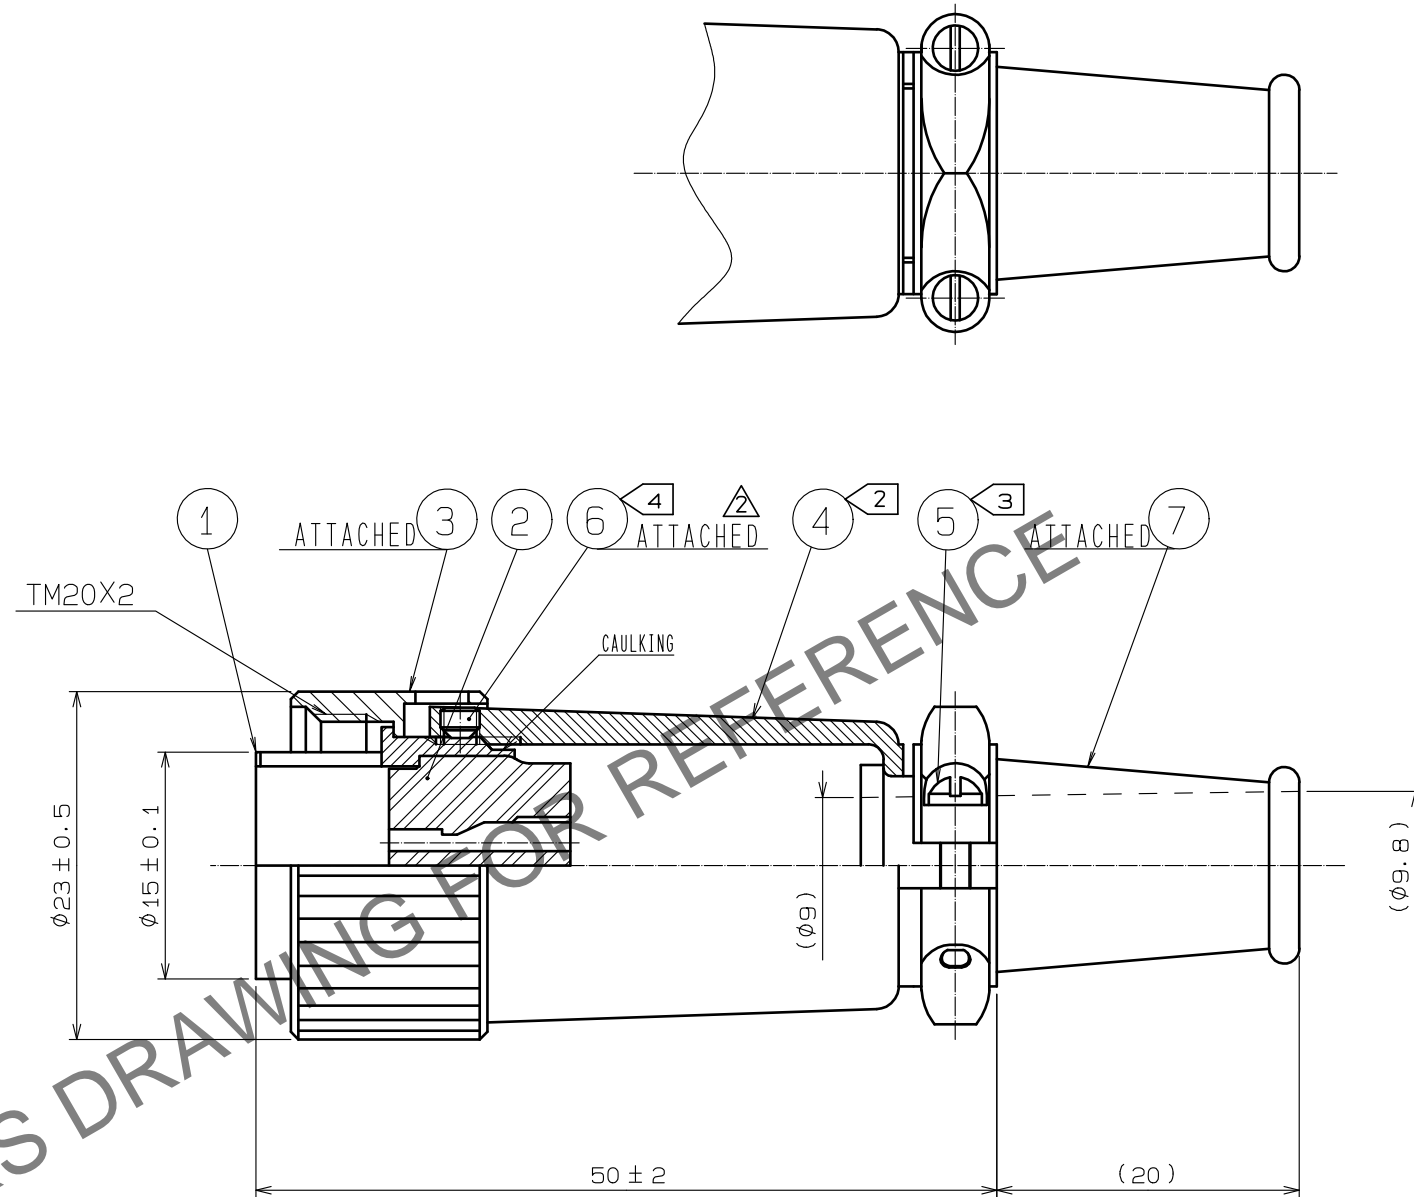


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

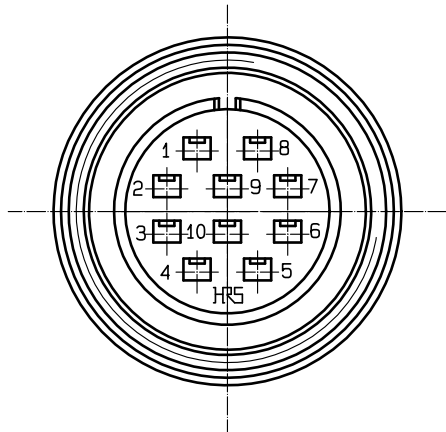

- NOTES 1 APPLICABLE CRIMP CONTACT:
AWG#24 ~ 20
RM-PC-212(CCL109-0670-9) OR RM-PC-112(CCL109-0668-7)
AWG#28 ~ 24
RM-PC-222(CCL109-0674-0) OR RM-PC-122(CCL109-0672-4)
2 THE RECOMMENDED CLAMP TORQUE REF. NO. ④: 2 TO 3 N · m
3 THE RECOMMENDED CLAMP TORQUE REF. NO. ⑤: 0.12 TO 0.15 N · m
4 THE RECOMMENDED CLAMP TORQUE REF. NO. ⑥: 0.3 TO 0.4 N · m
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT
REF. NO. ⑥ FROM LOOSENING.
5 ONE EXAMPLE OF THE ROTATION OF REF. NO. ④ TO REF. NO. ① IS SHOWN.

4	ALUMINUM ALLOY	MATTE FINISH ALUMITE<CHROME>			
3	BRASS	MATTE FINISH CHROME PLATE	7	CR	<BLACK>
2	POLYCARBONATE	<BLACK> UL94V-0	6	STEEL	NICKEL PLATING <small>HEXAGON SOCKET SET SCREW M2.6×0.45×2</small>
1	ZINC ALLOY	MATTE FINISH CHROME PLATE	5	BRASS	NICKEL PLATING <small>JIS B 1101 M2×0.4×8</small>
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00004014	DESIGNED TY. SUZUKI
HIROSE ELECTRIC CO., LTD.		APPROVED : MO. SATOH	20081030	DRAWING NO.	EDC3-007621-71
		CHECKED : HY. KOBAYASHI	20081030	PART NO.	RM15TPD-10PC<71>
		DESIGNED : MM. ISHII	20081029	CODE NO.	CL109-0677-8-71
		DRAWN : MM. ISHII	20081029		
					DATE 20200625