


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1		2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△					△					
△					△					
△					△					

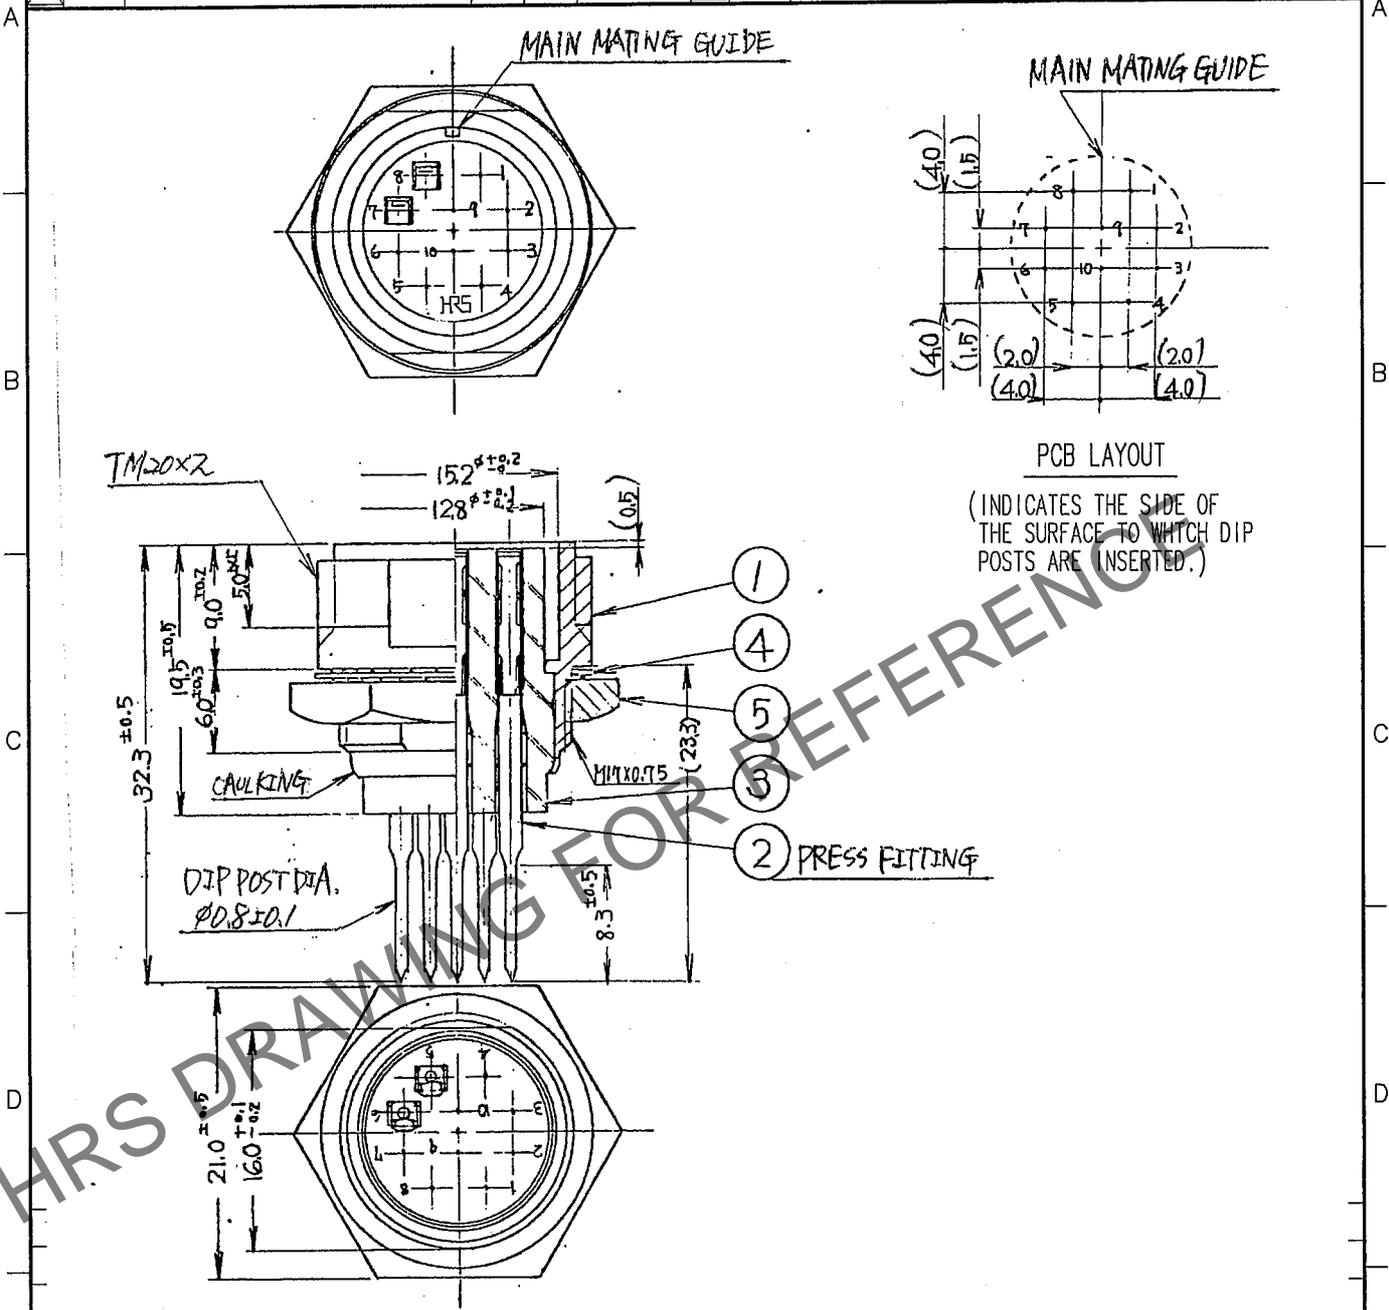

NOTE 1 THE RECOMMENDED CLAMP TORQUE,  
REF.NO. ④: 3 TO 4 N·m.  
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS  
RECOMMENDED TO PREVENT REF.NO. ④ FOR LOOSENING.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3	POLYCARBONATE	(BLACK) UL94V-0	5	BRASS	NICKLE PLATING
2	PHOSPHOR BRONZE	SILVER PLATING 4μm min.	4	PHOSPHOR BRONZE	NICKLE PLATING
1	ZINC ALLOY	MATTE FINISH CHROME PLATED			

CODE NO. (OLD) CL	DRAWN <i>M. Sato</i> 07.05.31	DESIGNED <i>T. Moroi</i> 07.05.31	CHECKED <i>E. Kimura</i> 07.06.07	APPROVED <i>M. Sato</i> 07.06.07	RELEASED
----------------------	-------------------------------------	---	---	--	----------

TO
R

DRAWING NO. EDC4-007892-71	PART NO. RM15TRD-10SB(71)
UNITS mm	CODE NO. CL109-0710-1-71
<b>HRS</b> HIROSE ELECTRIC CO., LTD.	1/1