


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

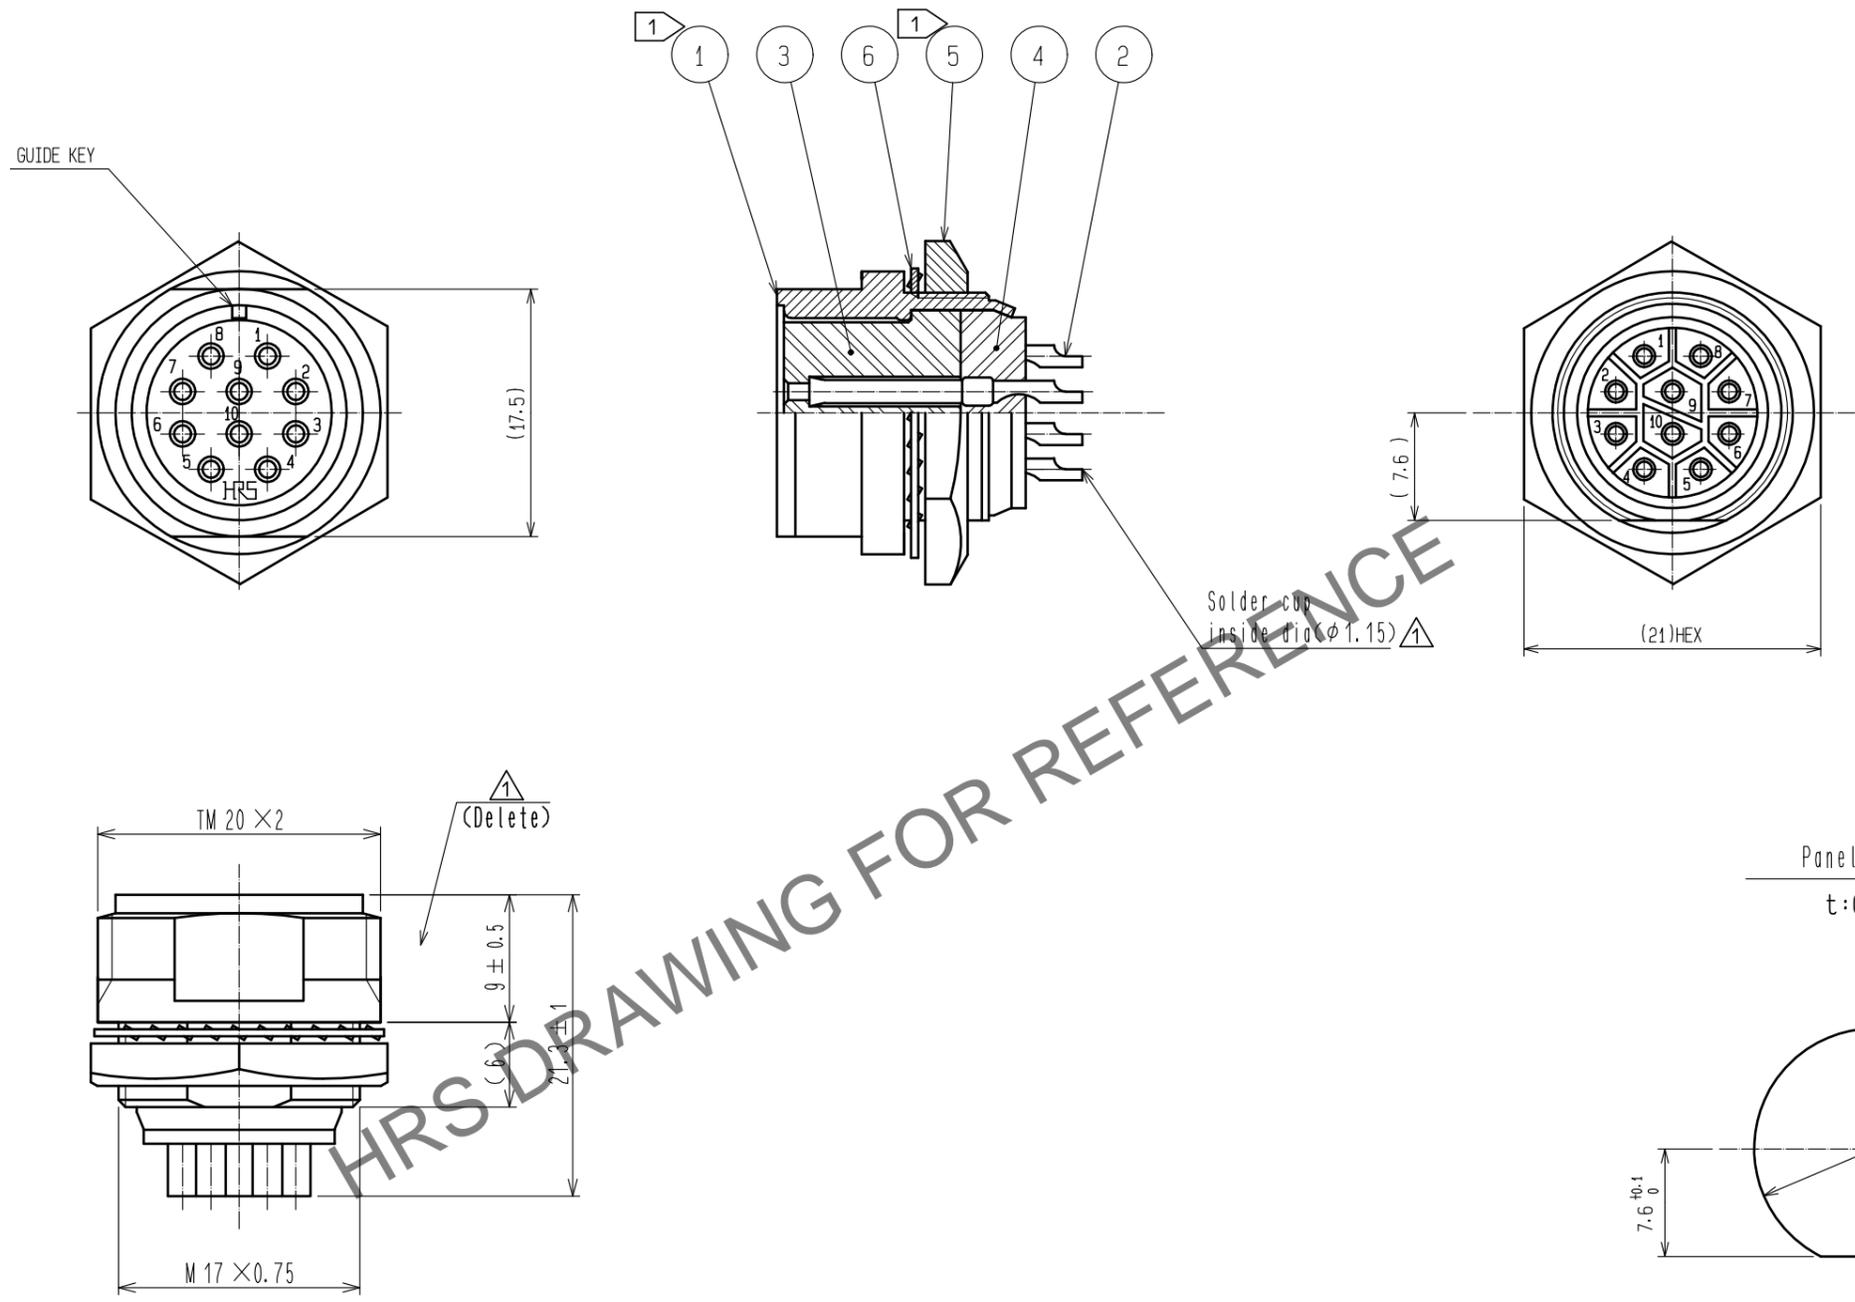

Note ① The tightening torque of Ref. No. ⑤ : 3 to 4 N·m.  
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M17×0.75) of Ref. No. ① in order to prevent loosening.

3	Polyphenylene sulfide (Black)	6	Phosphor bronze	Nickel plating					
2	Copper alloy	Silver plating 5μm min.	5	Brass	Nickel plating				
1	Zinc alloy	Matte finish chrome plated	4	Polyphenylene sulfide (Black)					
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS				
UNITS	mm	SCALE	2 : 1	COUNT	2	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
						DIS-C-00015639	HT. ZENBA	HY. KOBAYASHI	20230626
<b>HIROSE ELECTRIC CO., LTD.</b>		APPROVED	HY. KOBAYASHI	20221227	DRAWING NO.	EDC-006653-81-00			
		CHECKED	HY. KOBAYASHI	20221227	PART NO.	RM15TRD-10S(81)			
		DESIGNED	HT. ZENBA	20221227	CODE NO.	CL0109-0602-9-81			
		DRAWN	KR. SUZUKI	20221227					