


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

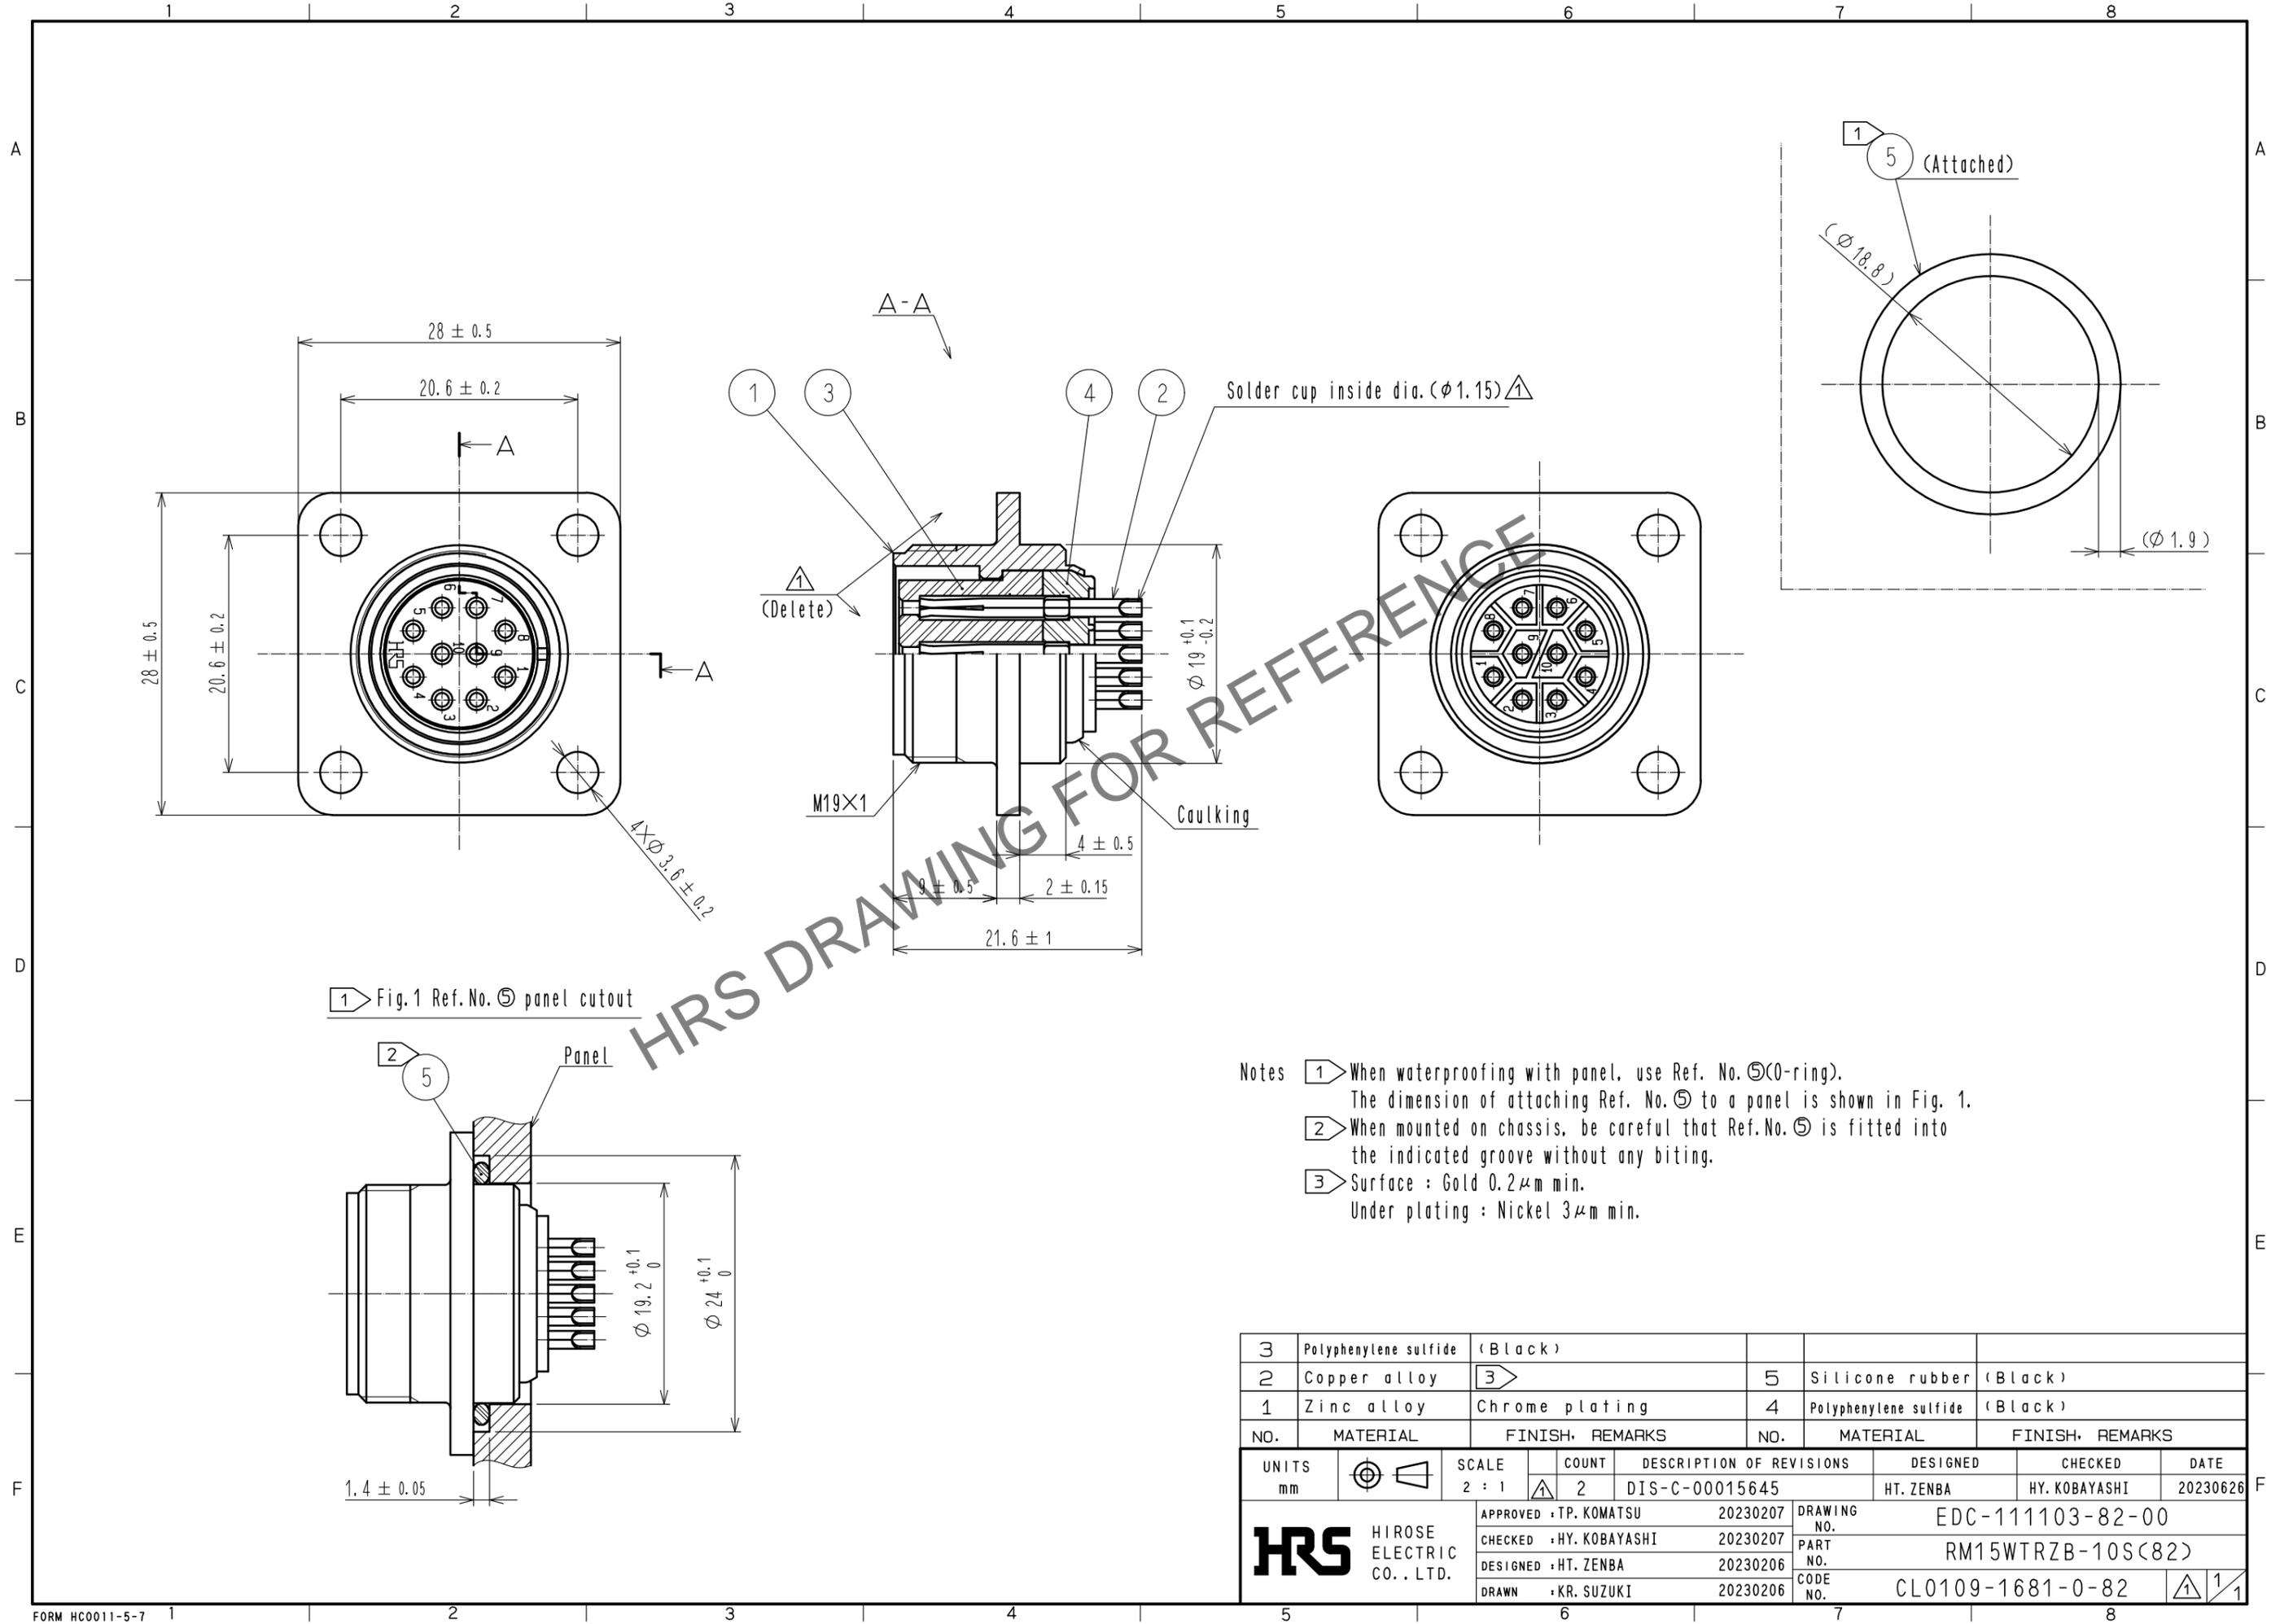

1 Fig.1 Ref.No. 5 panel cutout

- Notes
- 1 When waterproofing with panel, use Ref. No. 5(O-ring).  
The dimension of attaching Ref. No. 5 to a panel is shown in Fig. 1.
  - 2 When mounted on chassis, be careful that Ref.No. 5 is fitted into the indicated groove without any biting.
  - 3 Surface : Gold  $0.2\mu\text{m}$  min.  
Under plating : Nickel  $3\mu\text{m}$  min.

3	Polyphenylene sulfide	(Black)						
2	Copper alloy	3	5	Silicone rubber	(Black)			
1	Zinc alloy	Chrome plating	4	Polyphenylene sulfide	(Black)			
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS	
UNITS	$\phi$	SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		2 : 1	2	DIS-C-00015645		HT. ZENBA	HY. KOBAYASHI	20230626
APPROVED : TP. KOMATSU 20230207				DRAWING NO. EDC-111103-82-00				
CHECKED : HY. KOBAYASHI 20230207				PART NO. RM15WTRZB-10S(82)				
DESIGNED : HT. ZENBA 20230206				CODE NO. CL0109-1681-0-82				
DRAWN : KR. SUZUKI 20230206				1/1				