


⚠ 6 THIS PRODUCT SATISFIES CAT6 REQUIREMENTS FOR BASIC LINK CONFIGURATION.
(THE CONNECTOR BY ITSELF IS NOT CAT6 COMPLIANT.)

APPLICABLE RECEPTACLE:

TM21R-3C-88{***}

TM21R-5C-88{***}


TM21R-5C-88-LP{***}

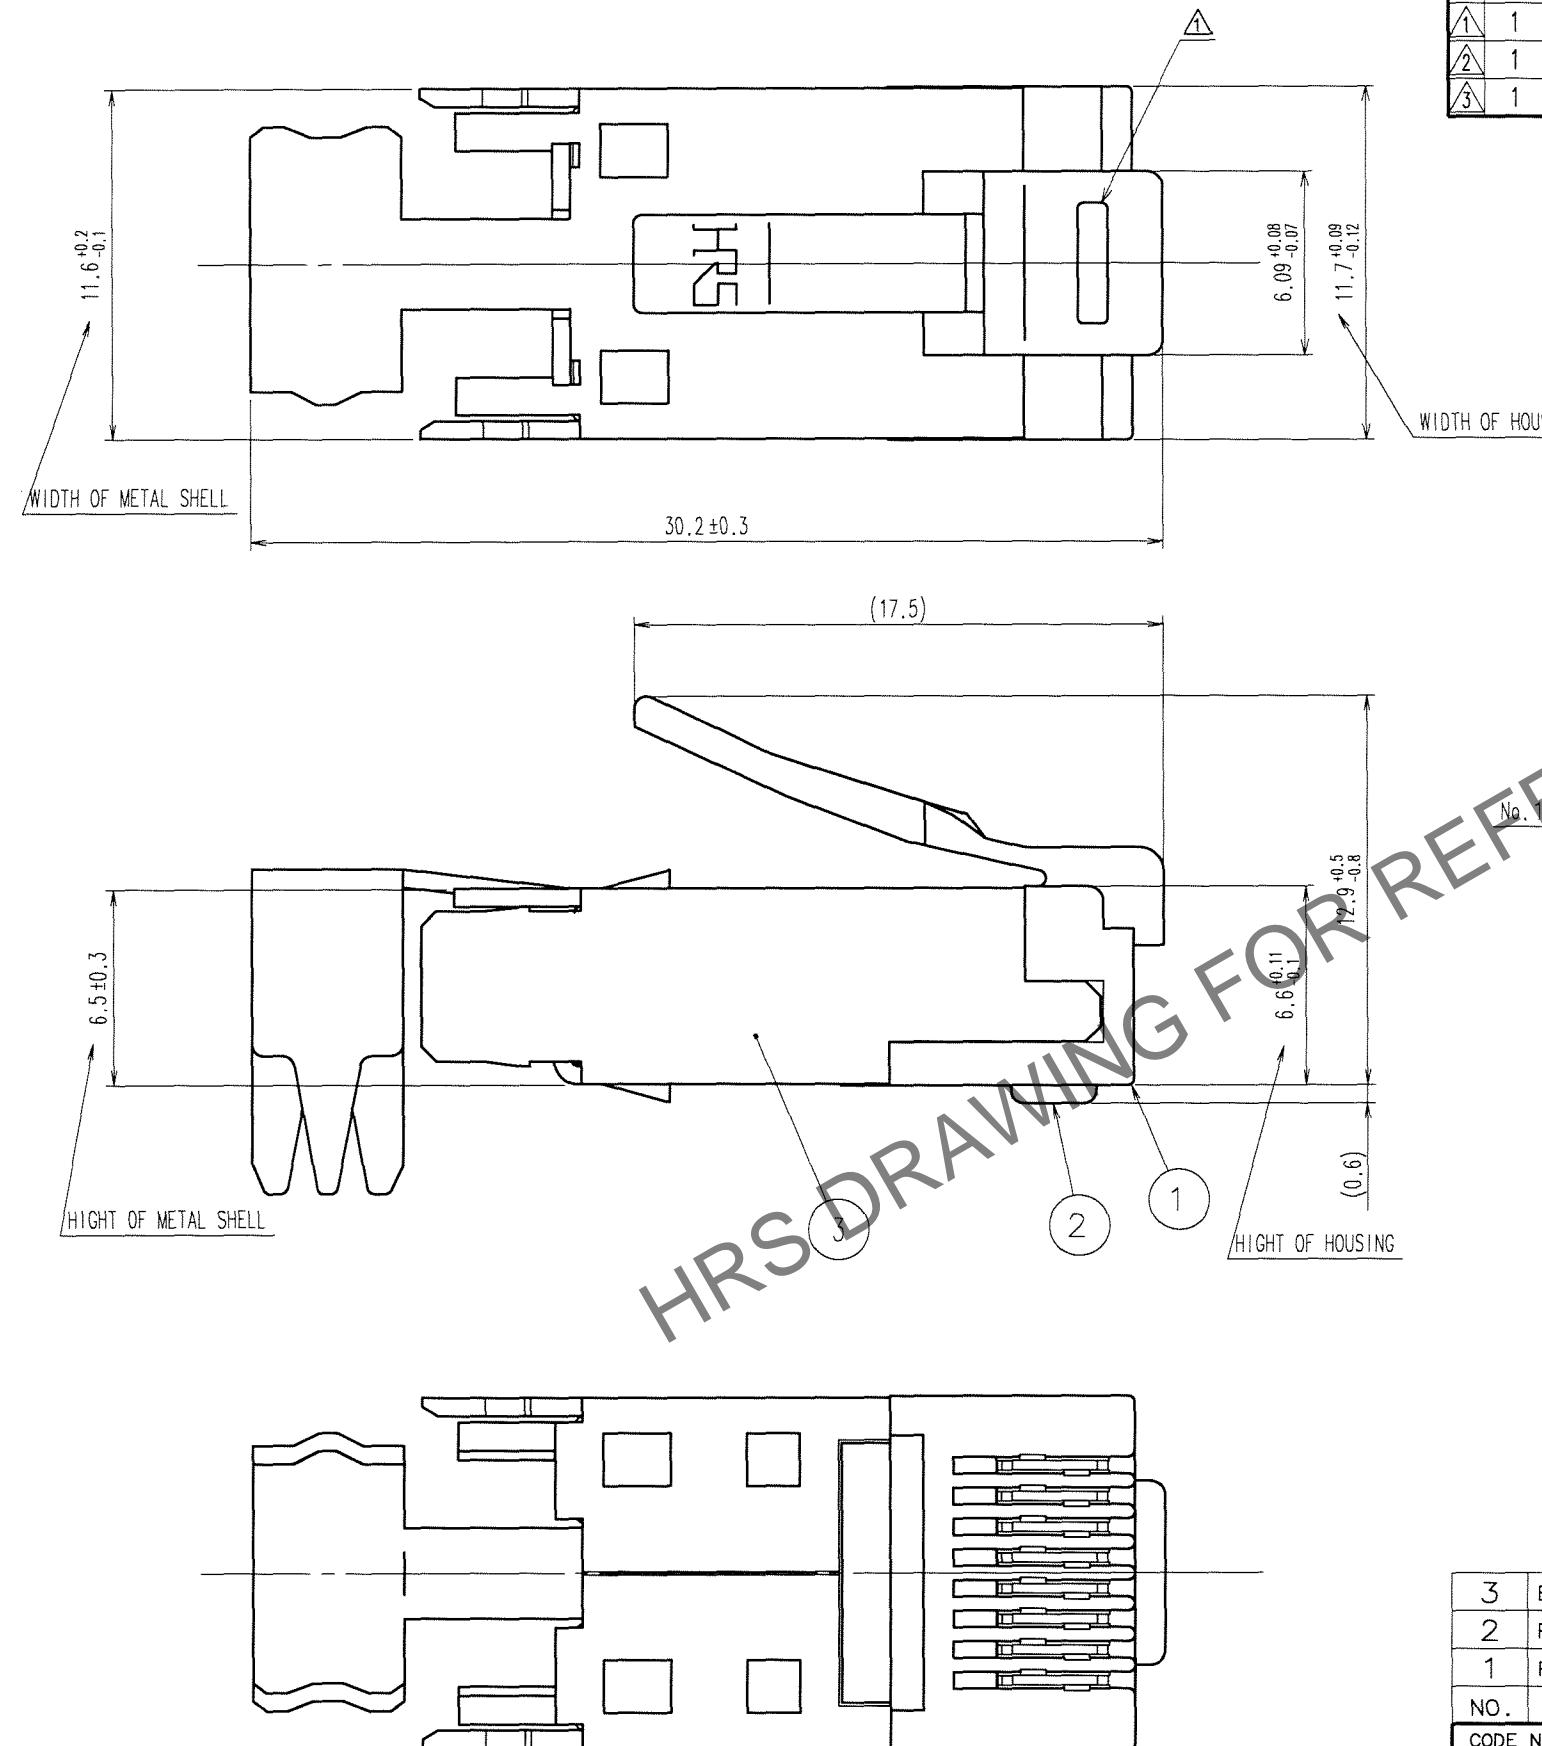

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	RE-E-07734	S.S	T.W	01.03.15	1	REWRITTEN BY CAD	Y.S	Y.E	06.09.01
1	RE-E-08257	K.H	T.W	01.12.21	1	DIS-E-000934	Y.S	Y.E	06.09.01
1	RE-E-09963	S.S	T.W	04.05.31					

2 TABLE-1

APPLICABLE CABLE WIRE		
JACKET	SHIELD	CONDUCTOR $\phi 0.5\text{ mm}$ SOLID WIRE
		AWG#24 (7/0.2) STRANDED WIRE
		AWG#25 (7/0.18) STRANDED WIRE
INSULATOR DIAMETER	($\phi 0.9 \sim 1.0$)	
JACKET DIAMETER	($\phi 6.6$) *1	

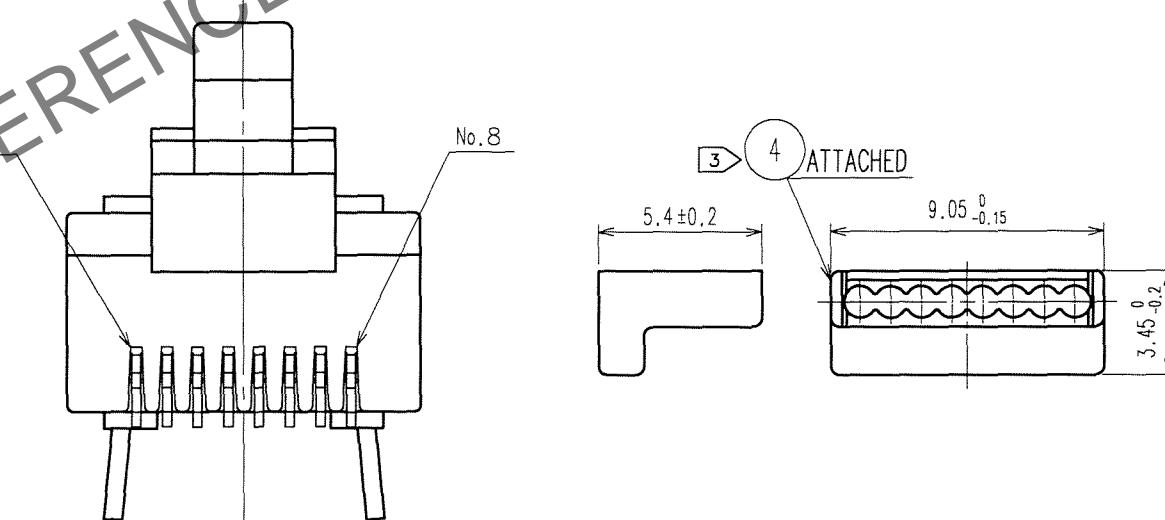

NOTES 1 () INDICATES THE REFERENCE DIMENSIONS.

2 APPLICABLE CABLE IS SHOWN IN TABLE-1

* 1 : THE OUTER DIAMETER OF THE VINYL JACKET VARIES SLIGHTLY
DEPENDING ON THE HARDNESS:6.6DIA. IS FOR REFERENCE.





3 PLEASE USE ACCESSORY AS A GUIDE PLATE AND ASSEMBLE CONNECTOR
WITH CABLES INSERTING ACCESSORY INTO CONNECTOR.

4 HOOD COLORS ARE SHOWN IN TABLE-2.

⚠ 5 TO SATISFY CAT5e PERFORMANCE, PLEASE ASSEMBLE ACCORDING TO HRS
INSTRUCTION.

3	BRASS	TIN PLATING ⚠	5	POLYAMIDE	4
2	PHOSPHOR BRONZE	GOLD PLATING 1.27 μm	4	POLYCARBONATE	(CLEAR)
1	POLYCARBONATE	(CLEAR)	NO.	MATERIAL	FINISH, REMARKS
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO.(OLD)			DRAWN	DESIGNED	CHECKED
			S.SATO	S.SATO	T.WATANABE
			00.07.03	00.07.03	00.07.03
SCALE	DRAWING NO.	PART NO.			
4 : 1	EDC3-121484-04	TM21P-88P			
UNITS			CODE NO.		
mm			CL222-2862-9		
			1/2		

TO
Q2
F

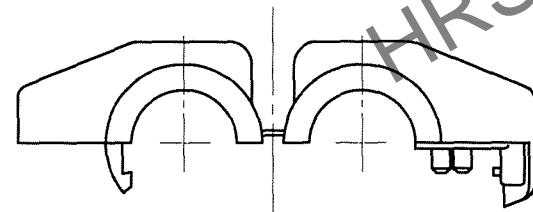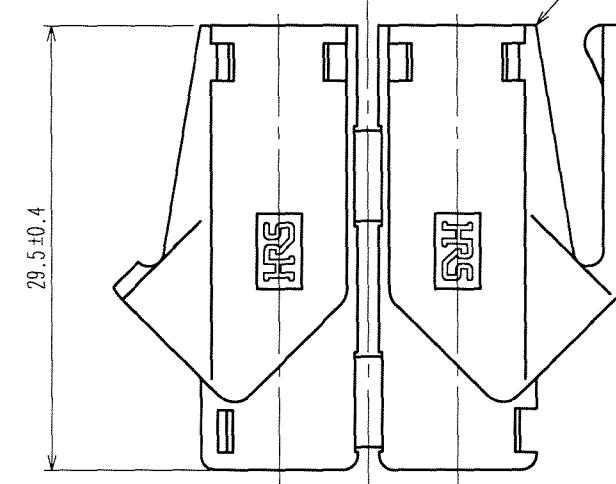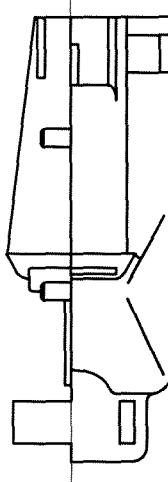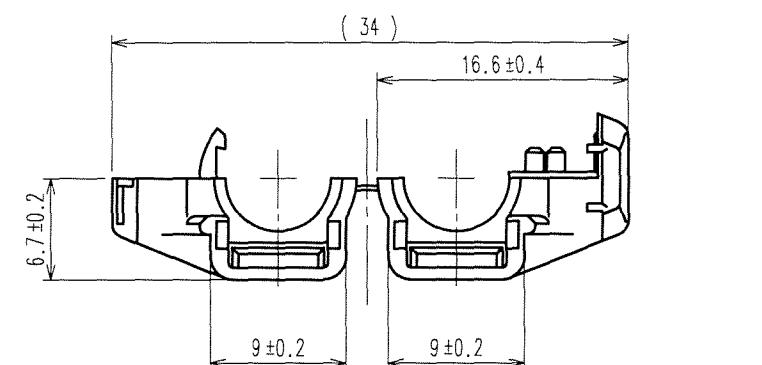


5	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	6	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

4 > TABLE-2


PART NO.	HRS NO.	COLOR
TM21P-88P	CL222-2862-9	LIGHT BEIGE
TM21P-88P(02)	CL222-2862-9(02)	MEDIUM GRAY
TM21P-88P(03)	CL222-2862-9(03)	BLACK
TM21P-88P(04)	CL222-2862-9(04)	NATURAL LIGHT GRAY
TM21P-88P(05)	CL222-2862-9(05)	RED
TM21P-88P(06)	CL222-2862-9(06)	GREEN
TM21P-88P(07)	CL222-2862-9(07)	BLUE
TM21P-88P(08)	CL222-2862-9(08)	YELLOW
TM21P-88P(09)	CL222-2862-9(09)	ORANGE

HOOD ATTACHMENT PROCEDURE
(FREE)

1. FIT THE OPENED HOOD ON THE CABLE AND CLOSE HOOD DIRECTION IS SHOWN AS AN EXAMPLE.

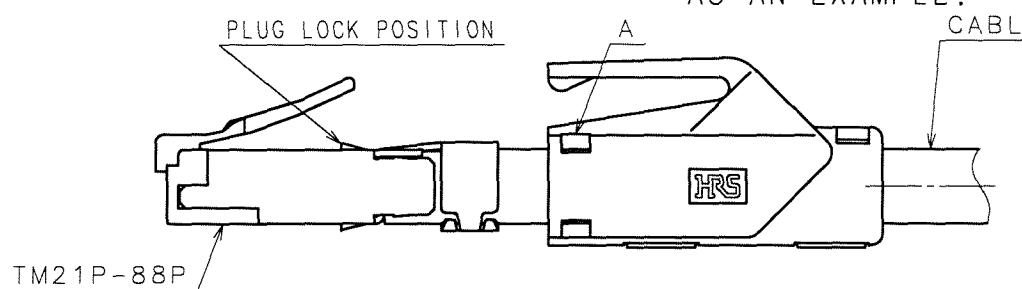

2. SLIDE THE CLOSED HOOD TO THE PLUG LOCK POSITION UNTIL BEING LOCKED AT A.

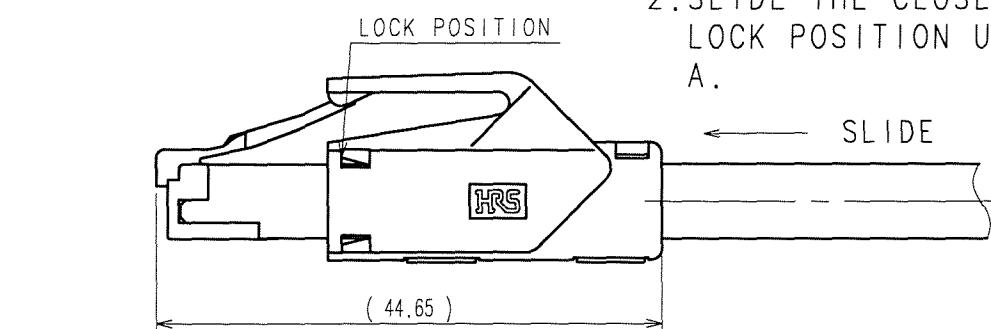

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO.(OLD)			DRAWN	DESIGNED	CHECKED
			S.SATO	S.SATO	T.WATANABE
			00.07.03	00.07.03	00.07.03
5	DRAWING NO. EDC3-121484-04	PART NO. TM21P-88P Γ_	6	CODE NO. CL222-2862-9- Γ_	RELEASED H.MIWA .
SCALE 2 : 1	UNITS mm	HIROSE ELECTRIC CO., LTD	2/2		