



Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.






A
B
C
D
E
F

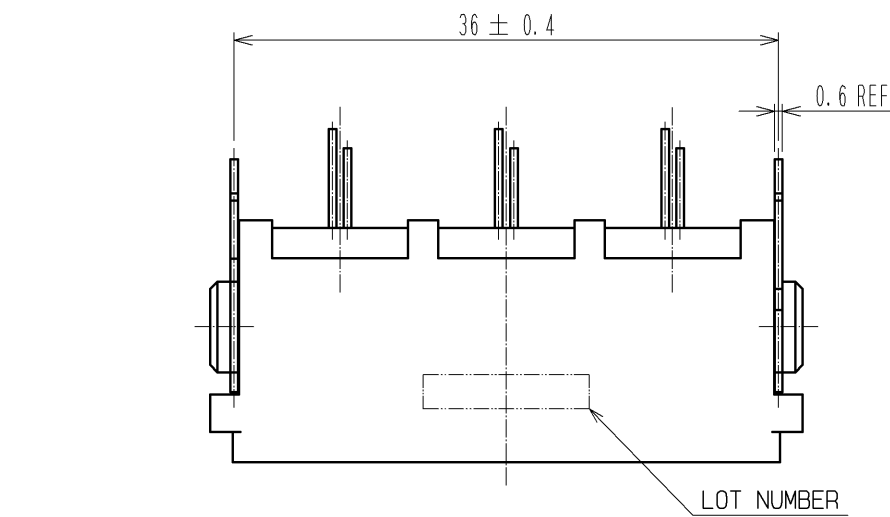


A - A

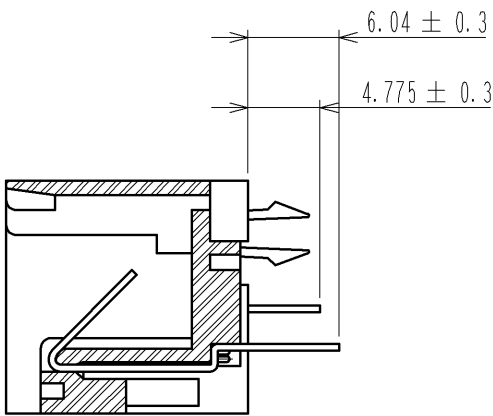

RECOMMENDED PC BOARD HOLE PATTERN
STRAIGHT TYPE, t1.6mm(MOUNTING SIDE)
TOLERANCE HAVE NOT BEEN DESCRIBED TO THE REFERENCE DIMENSION.

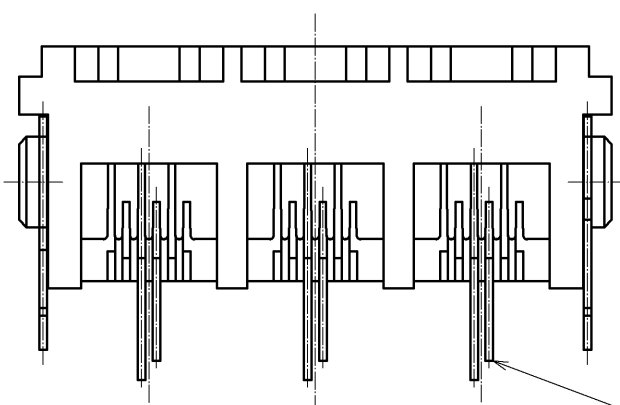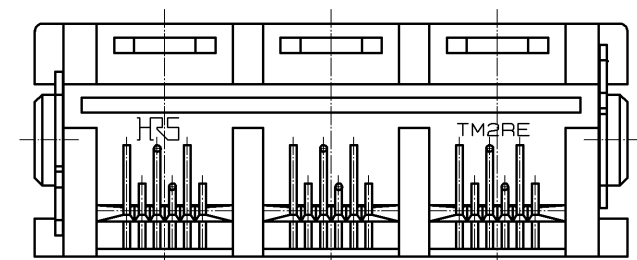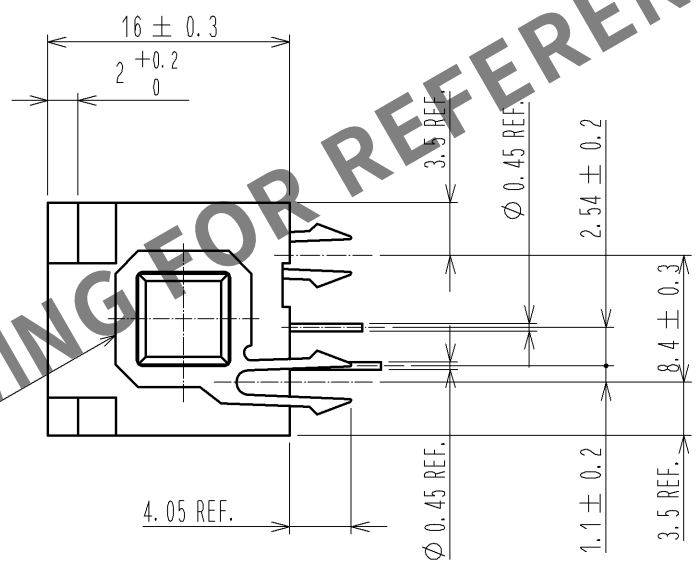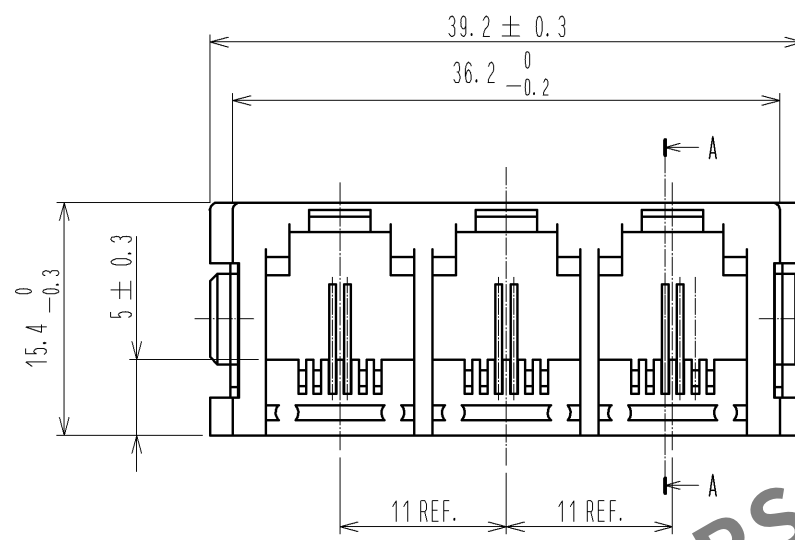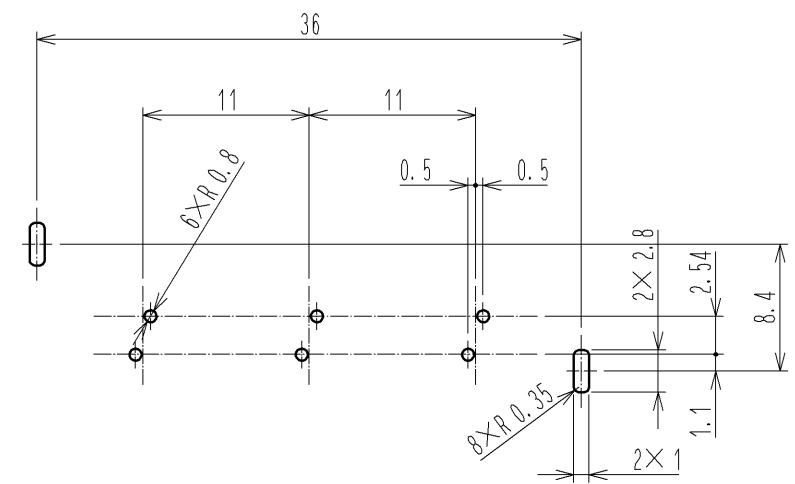

HRS DRAWING FOR REFERENCE

			3	PHOSPHOR BRONZE	SURFACE PLATING : TIN PLATING 3μm MIN. UNDER PLATING : NICKEL PLATING 2μm MIN.			
1	PBT	UL94V-0, (GRAY)		2	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 1.27μm MIN. LEAD AREA : GOLD PLATING 0.03μm MIN. UNDER PLATING : NICKEL PLATING 1.27μm MIN.		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : YH. ENAMI	10. 02. 24	DRAWING NO. EDC3-021705-01				
		CHECKED : HO. MIWA	10. 02. 24	PART NO. TM2RE-1806(50)				
		DESIGNED : HN. ANDO	10. 02. 23	CODE NO. CL222-0591-2-50				
		DRAWN : HN. ANDO	10. 02. 23	 1/1				