




Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV, RoHS COMPLIANT



RECOMMENDED PCB PATTERN

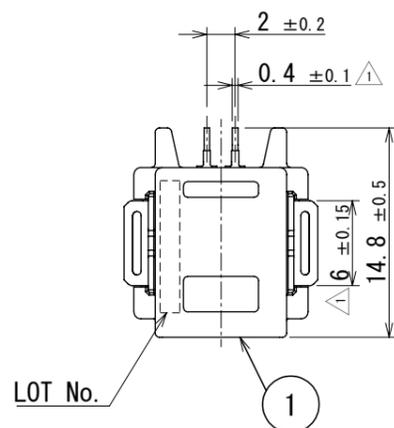


CONNECTOR MOUNTING SPACE

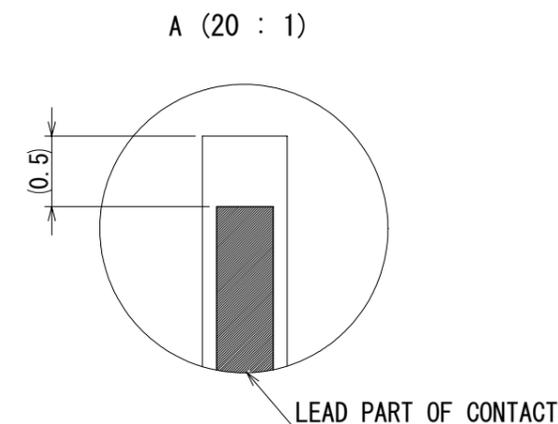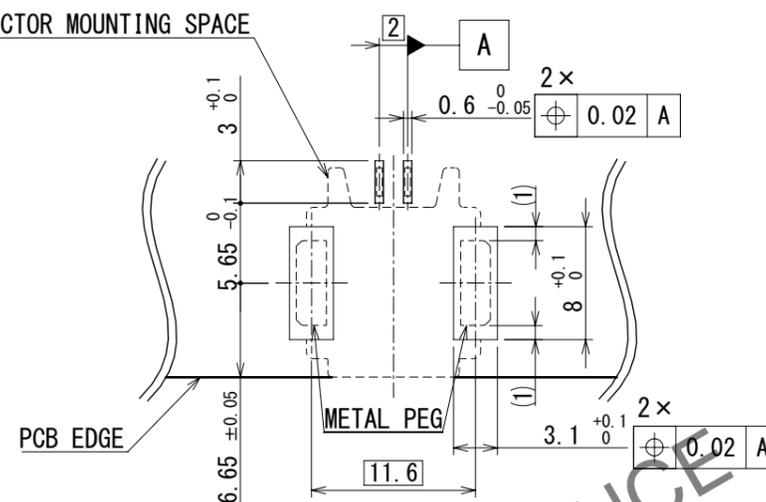

△ Add Left side view

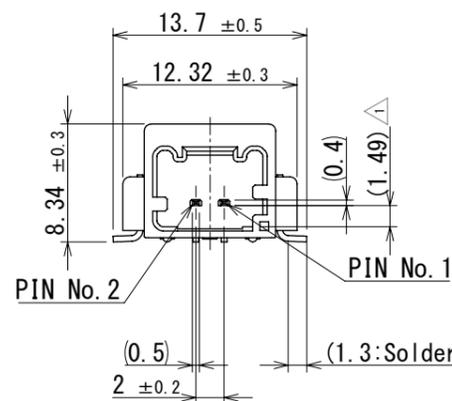


△ Add Back view

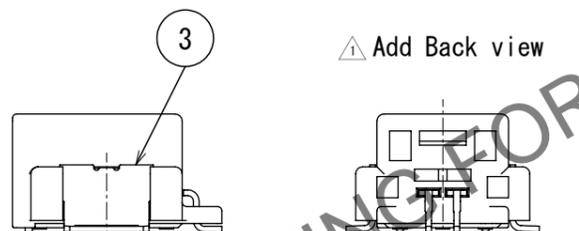


NOTE 1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW (REFER TO RIGHT FIG.)
USED REFLOW SYSTEM

NO. OF CYCLES : 2 MAX
PEAK : 250°C
OVER 230°C : 20~40s
PREHEAT : 150~180°C
90~120s

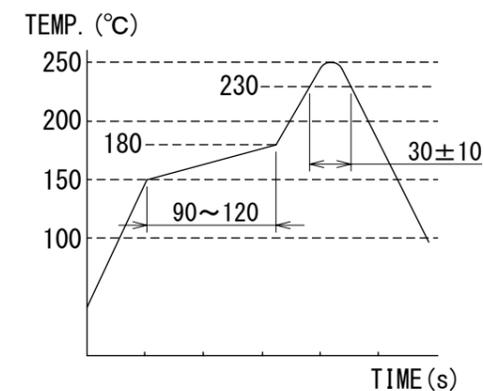

MATED CONNECTORS

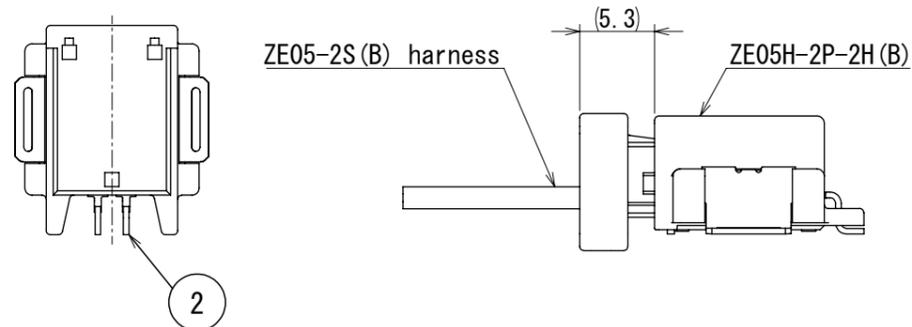


- △ 2. DELETE
- 3. CO-PLANARITY SHALL BE 0.1mm MAX.
- 4. RECOMMENDED PCB THICKNESS IS 1.6mm.
- 5. RECOMMENDED SOLDER THICKNESS IS 0.15mm.

2	BRASS	CONTACT AREA: TIN PLATING 1μm min LEAD AREA: TIN PLATING 1μm min	△	5	POLYESTER		
1	PA	VIOLET		4	POLYSTYRENE		
				3	BRASS	LEAD AREA: TIN PLATING 1μm min UNDER PLATING: NICKEL 1μm min	
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
UNITS	mm	SCALE	2:1	COUNT	10	DESCRIPTION OF REVISIONS	DIS-T-00024323
APPROVED : AH. EDASHIGE		2023. 07. 10		DESIGNED		AN. SAIKI	
CHECKED : TY. MOGI		2023. 07. 10		CHECKED		TY. MOGI	
DESIGNED : HR. EGAWA		2023. 07. 10		DATE		2025. 07. 09	
DRAWN : AN. SAIKI		2023. 07. 10		DRAWING NO.		EDC-402827-00-00	
PART NO.				ZE05H-2P-2H(B)			
CODE NO.				CL0752-2145-0-00			


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

PACKING STYLE

PACKING STYLE DRAWING

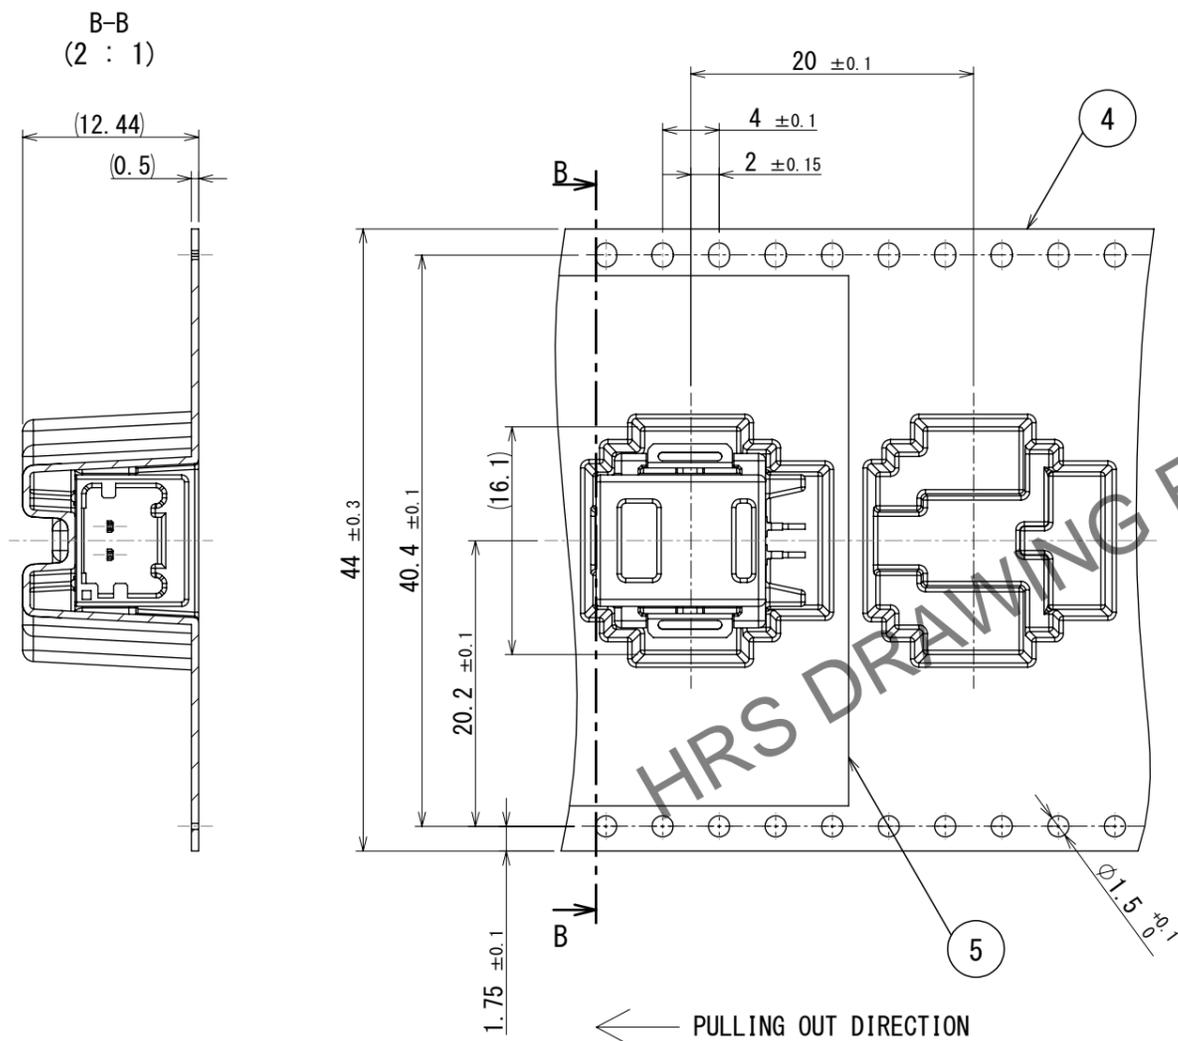


REEL DIMENSION (FREE)

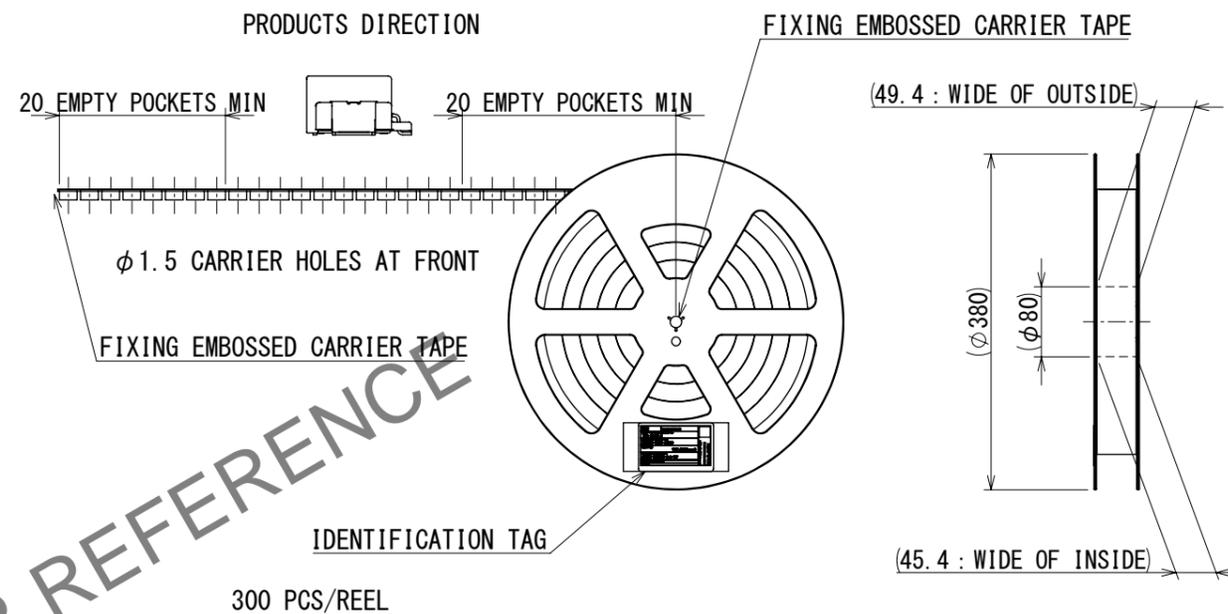

CARDBOARD DIMENSION (FREE)

W= (405) (mm)
 D= (405) (mm)
 H= (51) (mm)

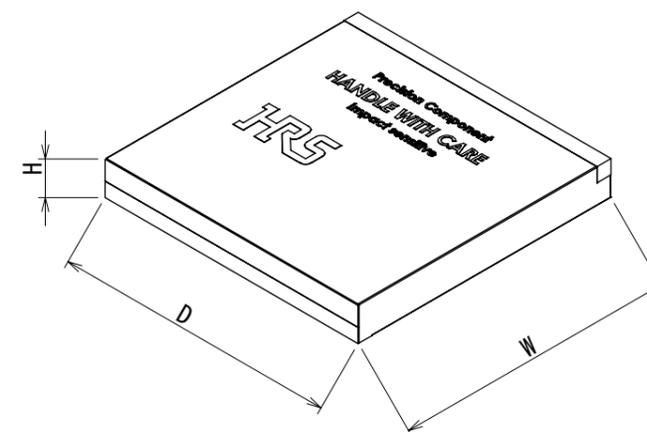

HRS	DRAWING NO.	EDC-402827-00-00	2/2
	PART NO.	ZE05H-2P-2H (B)	
	CODE NO.	CL0752-2145-0-00	