

Wire Protection &amp; Management &gt; Interconnect Devices &gt; SolderSleeve Shield Terminators



Operating Temperature (Max): 125 °C [ 257 °F ]

Expanded Inside Diameter (Min): 4.32 mm [.17 in ]

Recovered Inside Diameter (Max): 2.01 mm [.079 in ]

Pre-Installed Lead: No

Resistance Properties: Splash Protection

## Features

### Configuration Features

Pre-Installed Lead	No
--------------------	----

### Dimensions

Expanded Inside Diameter (Min)	4.32 mm[.17 in]
Recovered Inside Diameter (Max)	2.01 mm[.079 in]

### Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Resistance Properties	Splash Protection
Wire Temperature (Max)	85 °C

## Product Compliance

[For compliance documentation, visit the product page on TE.com >](#)

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Cd (18% in Solder) Pb (32% in Solder)
	Article Safe Usage Statements:

Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

#### Halogen Content

Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

#### Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



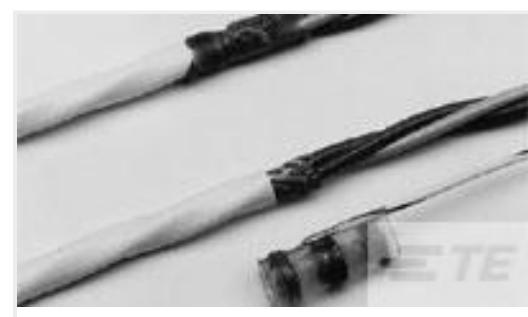
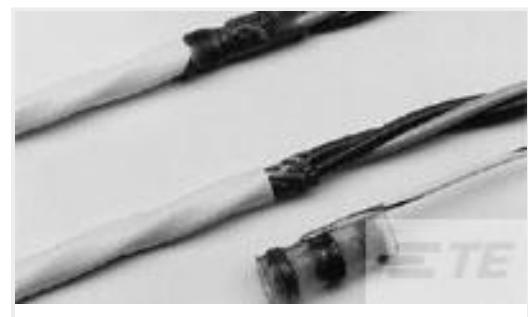
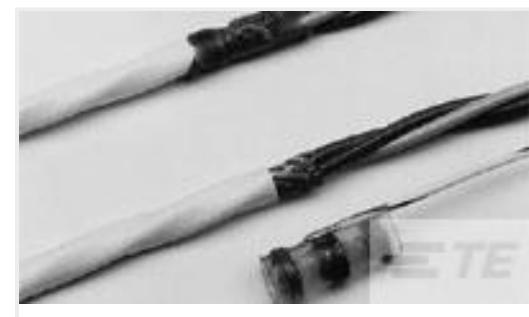
TE Part # EG8162-000  
[HL1920E-230V-EURO](#)

## Also in the Series | RAYCHEM CWT



[SolderSleeve Shield Terminators\(24\)](#)

## Customers Also Bought

TE Part #272423-000  
CWT-9TE Part #152435-000  
CWT-5-W122-5TE Part #734267-000  
CWT-7-STE Part #9264634014  
ATUM-12/4-X-SPTE Part #148447-000  
CWT-3-STE Part #NB08762001  
ATUM-9/3-X-STKTE Part #427559-000  
CWT-6TE Part #9-2176414-3  
7W STD M/OX 5% 130KTE Part #2-1103105-3  
HN.D.8.B.U.CTE Part #3-1105051-2  
HN.D-C-BU.AU.0,75

## Documents

### Product Drawings

#### CWT-5

English

### Datasheets & Catalog Pages

#### 1654025\_Sec8\_B-155\_CWT\_D-110\_D-1744

English

### Product Specifications

#### SolderSleeve One-Step Wire and Cable Terminators Installation Procedures for CWT and B-155 Products

English

### Product Specification

English