

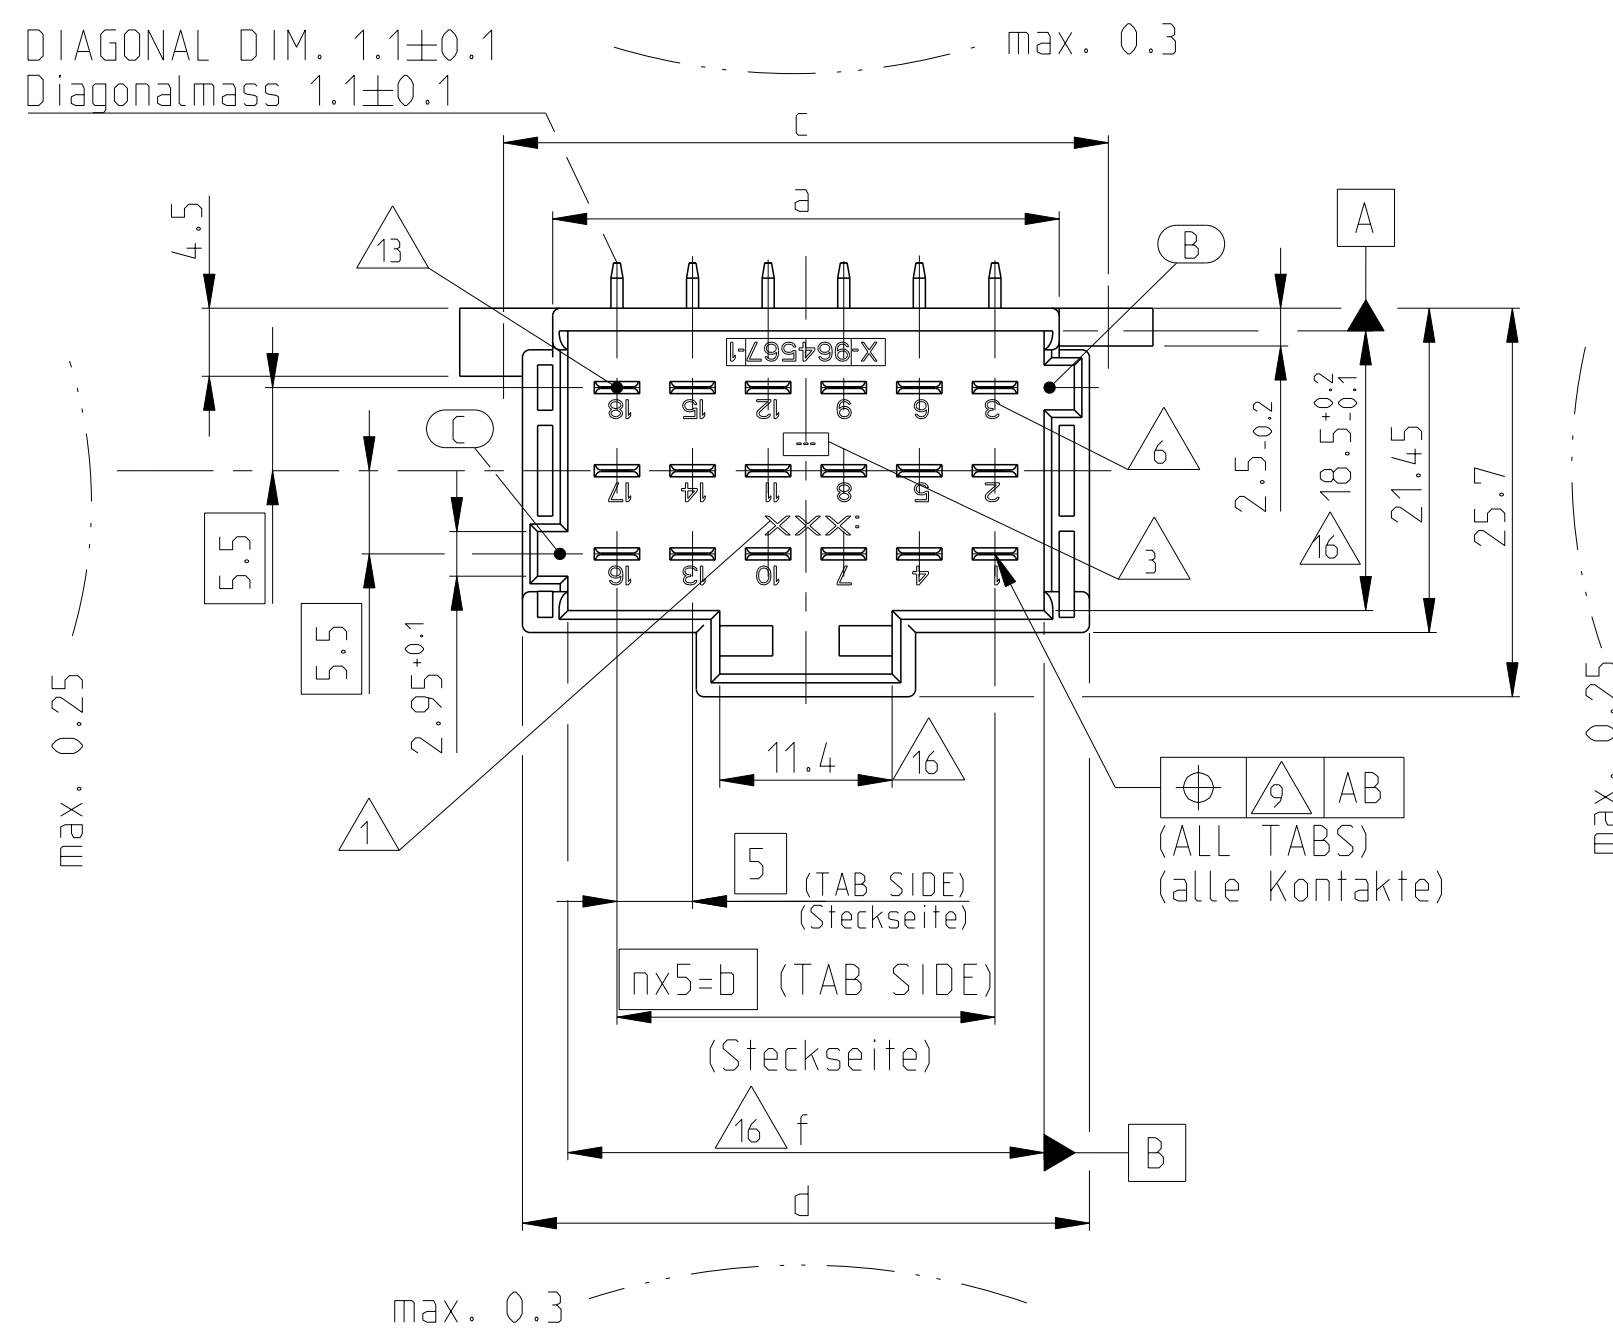
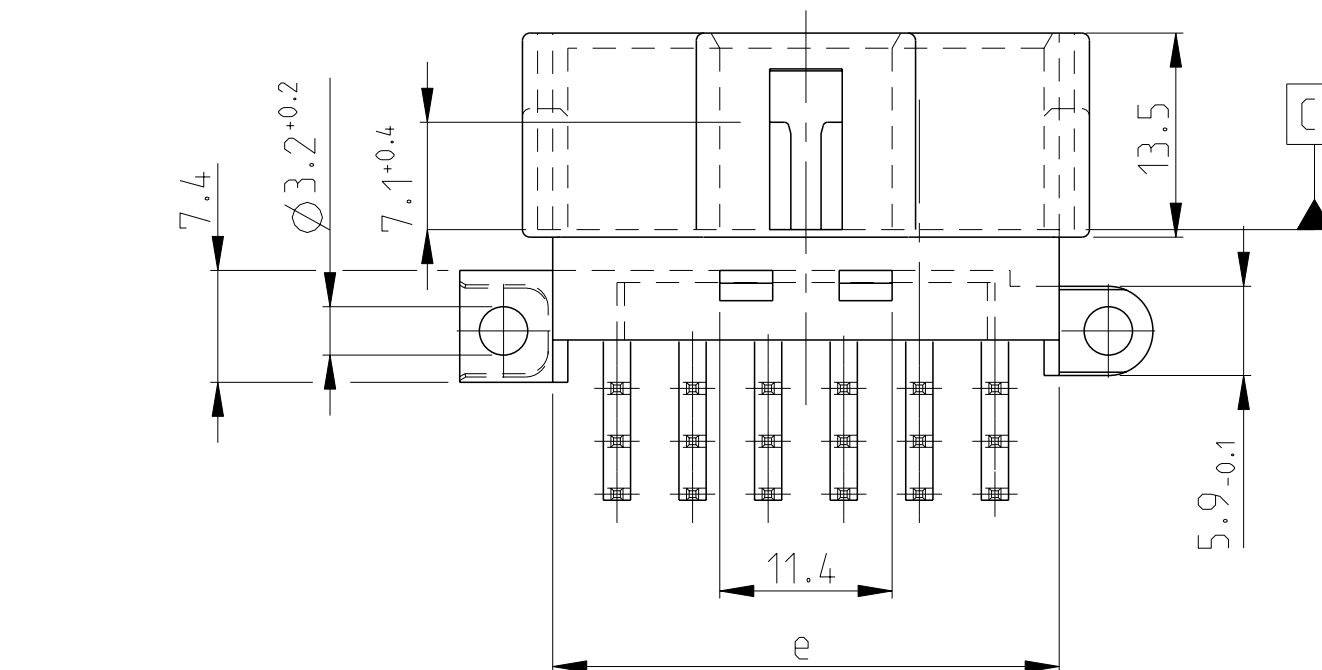


NOTES
Bemerkungen


- 

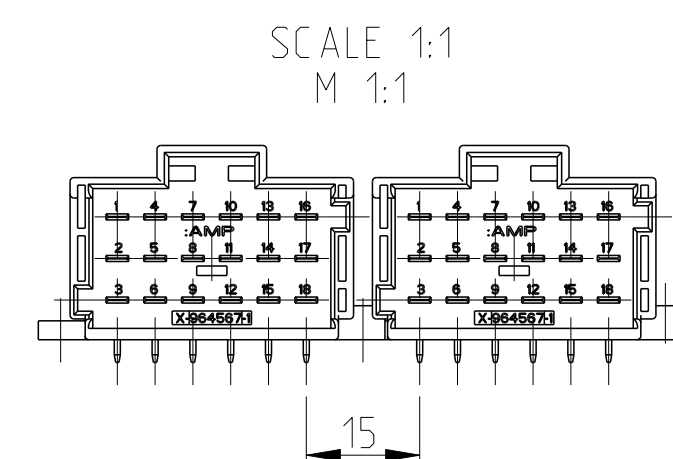

-1 WITH CODING
mit Kodierung

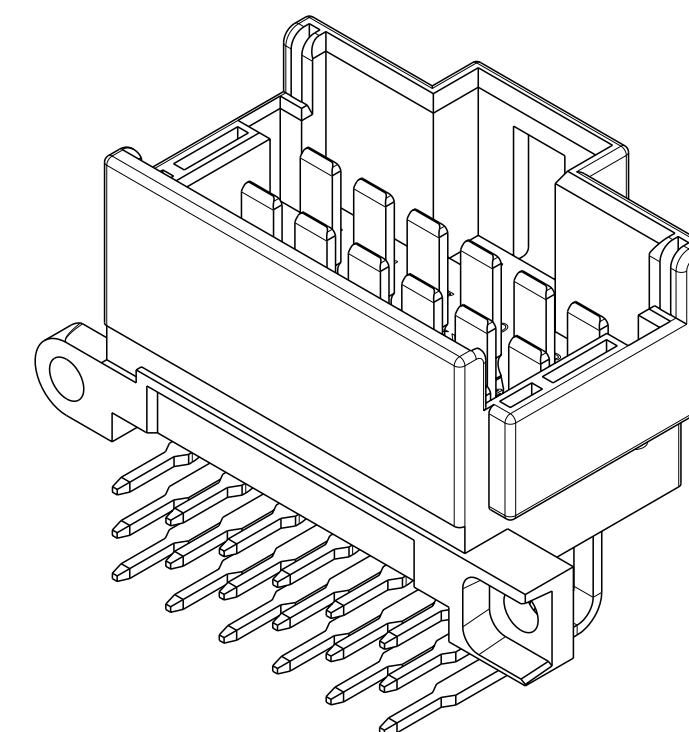


(GROOVES B-C) AS SHOWN
(Nuten B-C) wie gezeichnet

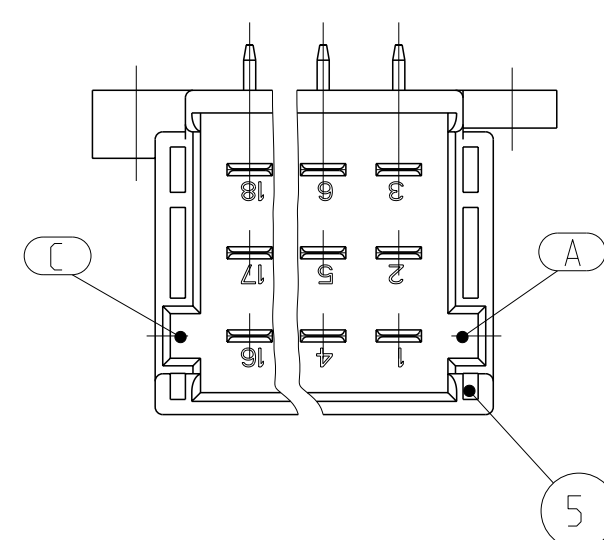

CODING **B**
Kodierung

(GROOVES A-C) AS SHOWN
(Nuten A-C) wie gezeichnet

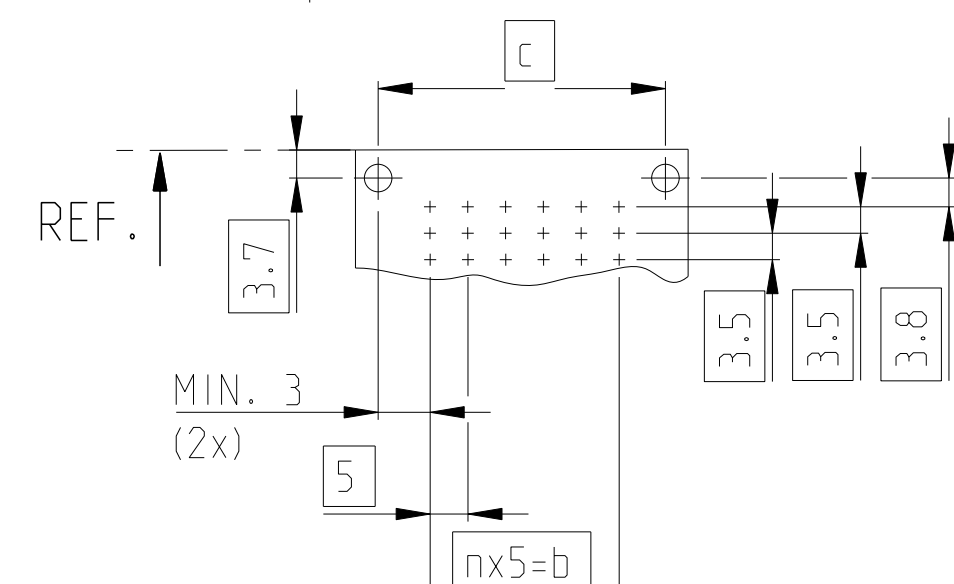4805 (3/11)

LOC	DIST	REVISIONS					
A1	-	P	LYR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1 OF 2			
TFD							

21	6	38.5	30	45	42.5	38.5	36.5	B (GROOVES) Nuten A-C A (GROOVES B-C) (Nuten B_C)		5-966140-6 A		4-966140-6 A		18.3g	4	7	TAB (43.4mm)	CuSn0.15/0.20	SEL. SILVER PLATED											
										6-966140-6 C		3-966140-6 C			3	7	TAB (34.4mm)	CuSn0.15/0.20	SEL. SILVER PLATED											
										6-966140-1 C		3-966140-1 C			2	7	TAB (25.4mm)	CuSn0.15/0.20	SEL. SILVER PLATED											
										6-966140-2 C		3-966140-2 C			5	1	21 POS. HOUSING	PA66-GF13	NATURAL/natur											
18	5	33.5	25	40	37.5	33.5	31.5			6-966140-3 C		3-966140-3 C		18.3g	4	7	TAB (43.4mm)	CuSn4	SEL. SILVER PLATED											
										6-966140-4 C		3-966140-4 C			3	7	TAB (34.4mm)	CuSn4	SEL. SILVER PLATED											
										6-966140-5 C		3-966140-5 C			2	7	TAB (25.4mm)	CuSn4	SEL. SILVER PLATED											
										6-966140-6 C		3-966140-6 C			1	1	21 POS. HOUSING	PA66-GF13	BLACK/schwarz											
15	4	28.5	20	35	32.5	28.5	26.5			6-966140-1 C		3-966140-1 C		16.0g	4	6	TAB (43.4mm)	CuSn4	SEL. SILVER PLATED											
										6-966140-2 C		3-966140-2 C			3	6	TAB (34.4mm)	CuSn4	SEL. SILVER PLATED											
										6-966140-3 C		3-966140-3 C			2	6	TAB (25.4mm)	CuSn4	SEL. SILVER PLATED											
										6-966140-4 C		3-966140-4 C			1	1	18 POS. HOUSING	PA66-GF13	BLACK/schwarz											
12	3	23.5	15	30	27.5	23.5	21.5		6-966140-5 C		3-966140-5 C		13.6g	4	5	TAB (43.4mm)	CuSn4	SEL. SILVER PLATED												
									6-966140-6 C		3-966140-6 C			3	5	TAB (34.4mm)	CuSn4	SEL. SILVER PLATED												
									6-966140-1 C		3-966140-1 C			2	5	TAB (25.4mm)	CuSn4	SEL. SILVER PLATED												
									6-966140-2 C		3-966140-2 C			1	1	15 POS. HOUSING	PA66-GF13	BLACK/schwarz												
9	2	18.5	10	25	22.5	18.5	16.5		6-966140-3 C		3-966140-3 C		11.2g	4	4	TAB (43.4mm)	CuSn4	SEL. SILVER PLATED												
									6-966140-4 C		3-966140-4 C			3	4	TAB (34.4mm)	CuSn4	SEL. SILVER PLATED												
									6-966140-5 C		3-966140-5 C			2	4	TAB (25.4mm)	CuSn4	SEL. SILVER PLATED												
									6-966140-6 C		3-966140-6 C			5	1	12 POS. HOUSING	PA66-GF13	NATURAL/natur												
6	1	13.5	5	20	17.5	13.5	11.5		6-966140-1 C		3-966140-1 C		8.9g	4	3	TAB (43.4mm)	CuSn4	SEL. SILVER PLATED												
									6-966140-2 C		3-966140-2 C			3	3	TAB (34.4mm)	CuSn4	SEL. SILVER PLATED												
									6-966140-3 C		3-966140-3 C			2	3	TAB (25.4mm)	CuSn4	SEL. SILVER PLATED												
									6-966140-4 C		3-966140-4 C			1	1	9 POS. HOUSING	PA66-GF13	BLACK/schwarz												
POSITIONS Polzahl	n	a±0.2	b	c	d _{-0.2}	e _{-0.25}	f	CODING Kodierung		6-966140-5 C		3-966140-5 C		6.6g	4	2	TAB (43.4mm)	CuSn4	SEL. SILVER PLATED											
															3	2	TAB (34.4mm)	CuSn4	SEL. SILVER PLATED											
															2	2	TAB (25.4mm)	CuSn4	SEL. SILVER PLATED											
															1	1	6 POS. HOUSING	PA66-GF13	BLACK/schwarz											
															SURFACE/Oberflaeche															
															COLOUR/ Farbe															

21	6	38.5	30	45	42.5	38.5	36.5	B (GROOVES) Nuten A-C A (GROOVES B-C) (Nuten B-C)		8-966140-6 A		1-966140-6 A		18.3g	4	7	TAB (43.4mm)	CuSn4	TINNED/verzinkt	
										9-966140-6 F		966140-6 F			3	7	TAB (34.4mm)	CuSn4	TINNED/verzinkt	
										9-966140-1 F		966140-1 F			2	7	TAB (25.4mm)	CuSn4	TINNED/verzinkt	
										9-966140-2 F		966140-2 F			5	1	21 POS. HOUSING	PA66-GF13	NATURAL/natur	
18	5	33.5	25	40	37.5	33.5	31.5			9-966140-6 F		966140-6 F		18.3g	4	7	TAB (43.4mm)	CuSn4	TINNED/verzinkt	
										9-966140-1 F		966140-1 F			3	7	TAB (34.4mm)	CuSn4	TINNED/verzinkt	
										9-966140-2 F		966140-2 F			2	7	TAB (25.4mm)	CuSn4	TINNED/verzinkt	
15	4	28.5	20	35	32.5	28.5	26.5			9-966140-1 F		966140-1 F		16.0g	1	1	21 POS. HOUSING	PA66-GF13	BLACK/schwarz	
										9-966140-2 F		966140-2 F			4	6	TAB (43.4mm)	CuSn4	TINNED/verzinkt	
										9-966140-3 F		966140-3 F			3	6	TAB (34.4mm)	CuSn4	TINNED/verzinkt	
12	3	23.5	15	30	27.5	23.5	21.5		B (GROOVES) Nuten A-C A (GROOVES B-C) (Nuten B-C)		9-966140-3 F		966140-3 F		13.6g	2	6	TAB (25.4mm)	CuSn4	TINNED/verzinkt
											9-966140-4 F		966140-4 F			1	1	18 POS. HOUSING	PA66-GF13	BLACK/schwarz
										9-966140-5 F		966140-5 F		4		5	TAB (43.4mm)	CuSn4	TINNED/verzinkt	
										9-966140-6 F		966140-6 F		3		5	TAB (34.4mm)	CuSn4	TINNED/verzinkt	
9	2	18.5	10	25	22.5	18.5	16.5			9-966140-1 F		966140-1 F		11.2g	2	5	TAB (25.4mm)	CuSn4	TINNED/verzinkt	
										9-966140-2 F		966140-2 F			1	1	15 POS. HOUSING	PA66-GF13	BLACK/schwarz	
										9-966140-3 F		966140-3 F			4	4	TAB (43.4mm)	CuSn4	TINNED/verzinkt	
6	1	13.5	5	20	17.5	13.5	11.5			9-966140-4 F		966140-4 F		8.9g	3	4	TAB (34.4mm)	CuSn4	TINNED/verzinkt	
										9-966140-5 F		966140-5 F			2	4	TAB (25.4mm)	CuSn4	TINNED/verzinkt	
										9-966140-6 F		966140-6 F			1	1	12 POS. HOUSING	PA66-GF13	BLACK/schwarz	
										9-966140-7 F		966140-7 F			4	3	TAB (43.4mm)	CuSn4	TINNED/verzinkt	
POSITIONS Polzahl	n	a±0.2	b	c	d _{-0.2}	e _{-0.25}	f	CODING Kodierung		CAVITY NUMBERING Kammerbezeichnung	ORDER NO. REV. Bestell-Nr.	ORDER NO. REV. Bestell-Nr.	WEIGHT Gewicht	POS.	QTY Stueck	DESCRIPTION Benennung Einzelteil	MATERIAL Werkstoff	SURFACE/Oberflaeche		
									COLOUR/ Farbe											