
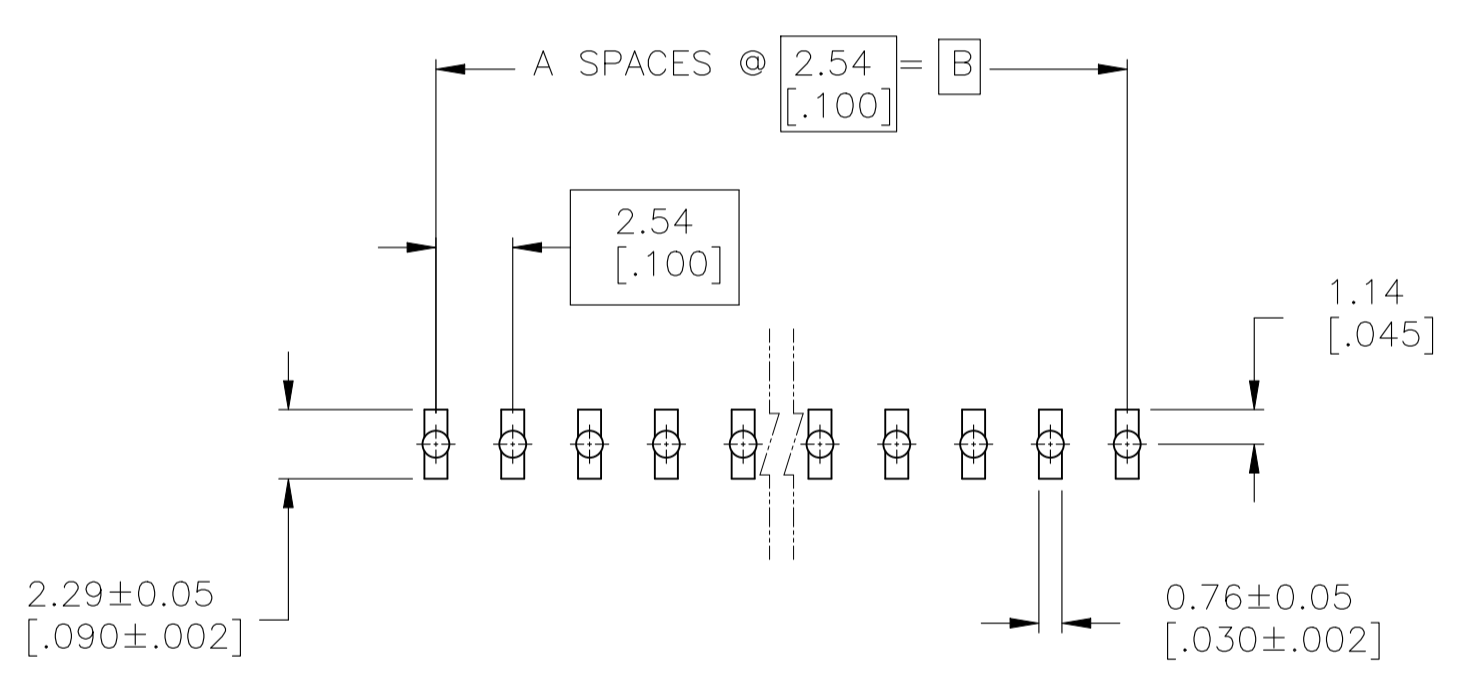


REVISIONS				
REV	DATE	BY	APPV	DESCRIPTION
H4	11JAN2026	ABS	PS	ECR-25-266356

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 4 PLATING: 0.00254-0.00508 [.000100-.000200] MATTE TIN LEAD, OVER 0.00127 [.000050] NICKEL.
- 5 HOUSING: LCP, COLOR-BLACK. POSTS: COPPER ALLOY.
- 6 PLATING: 0.00254-0.00508 [.000100-.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

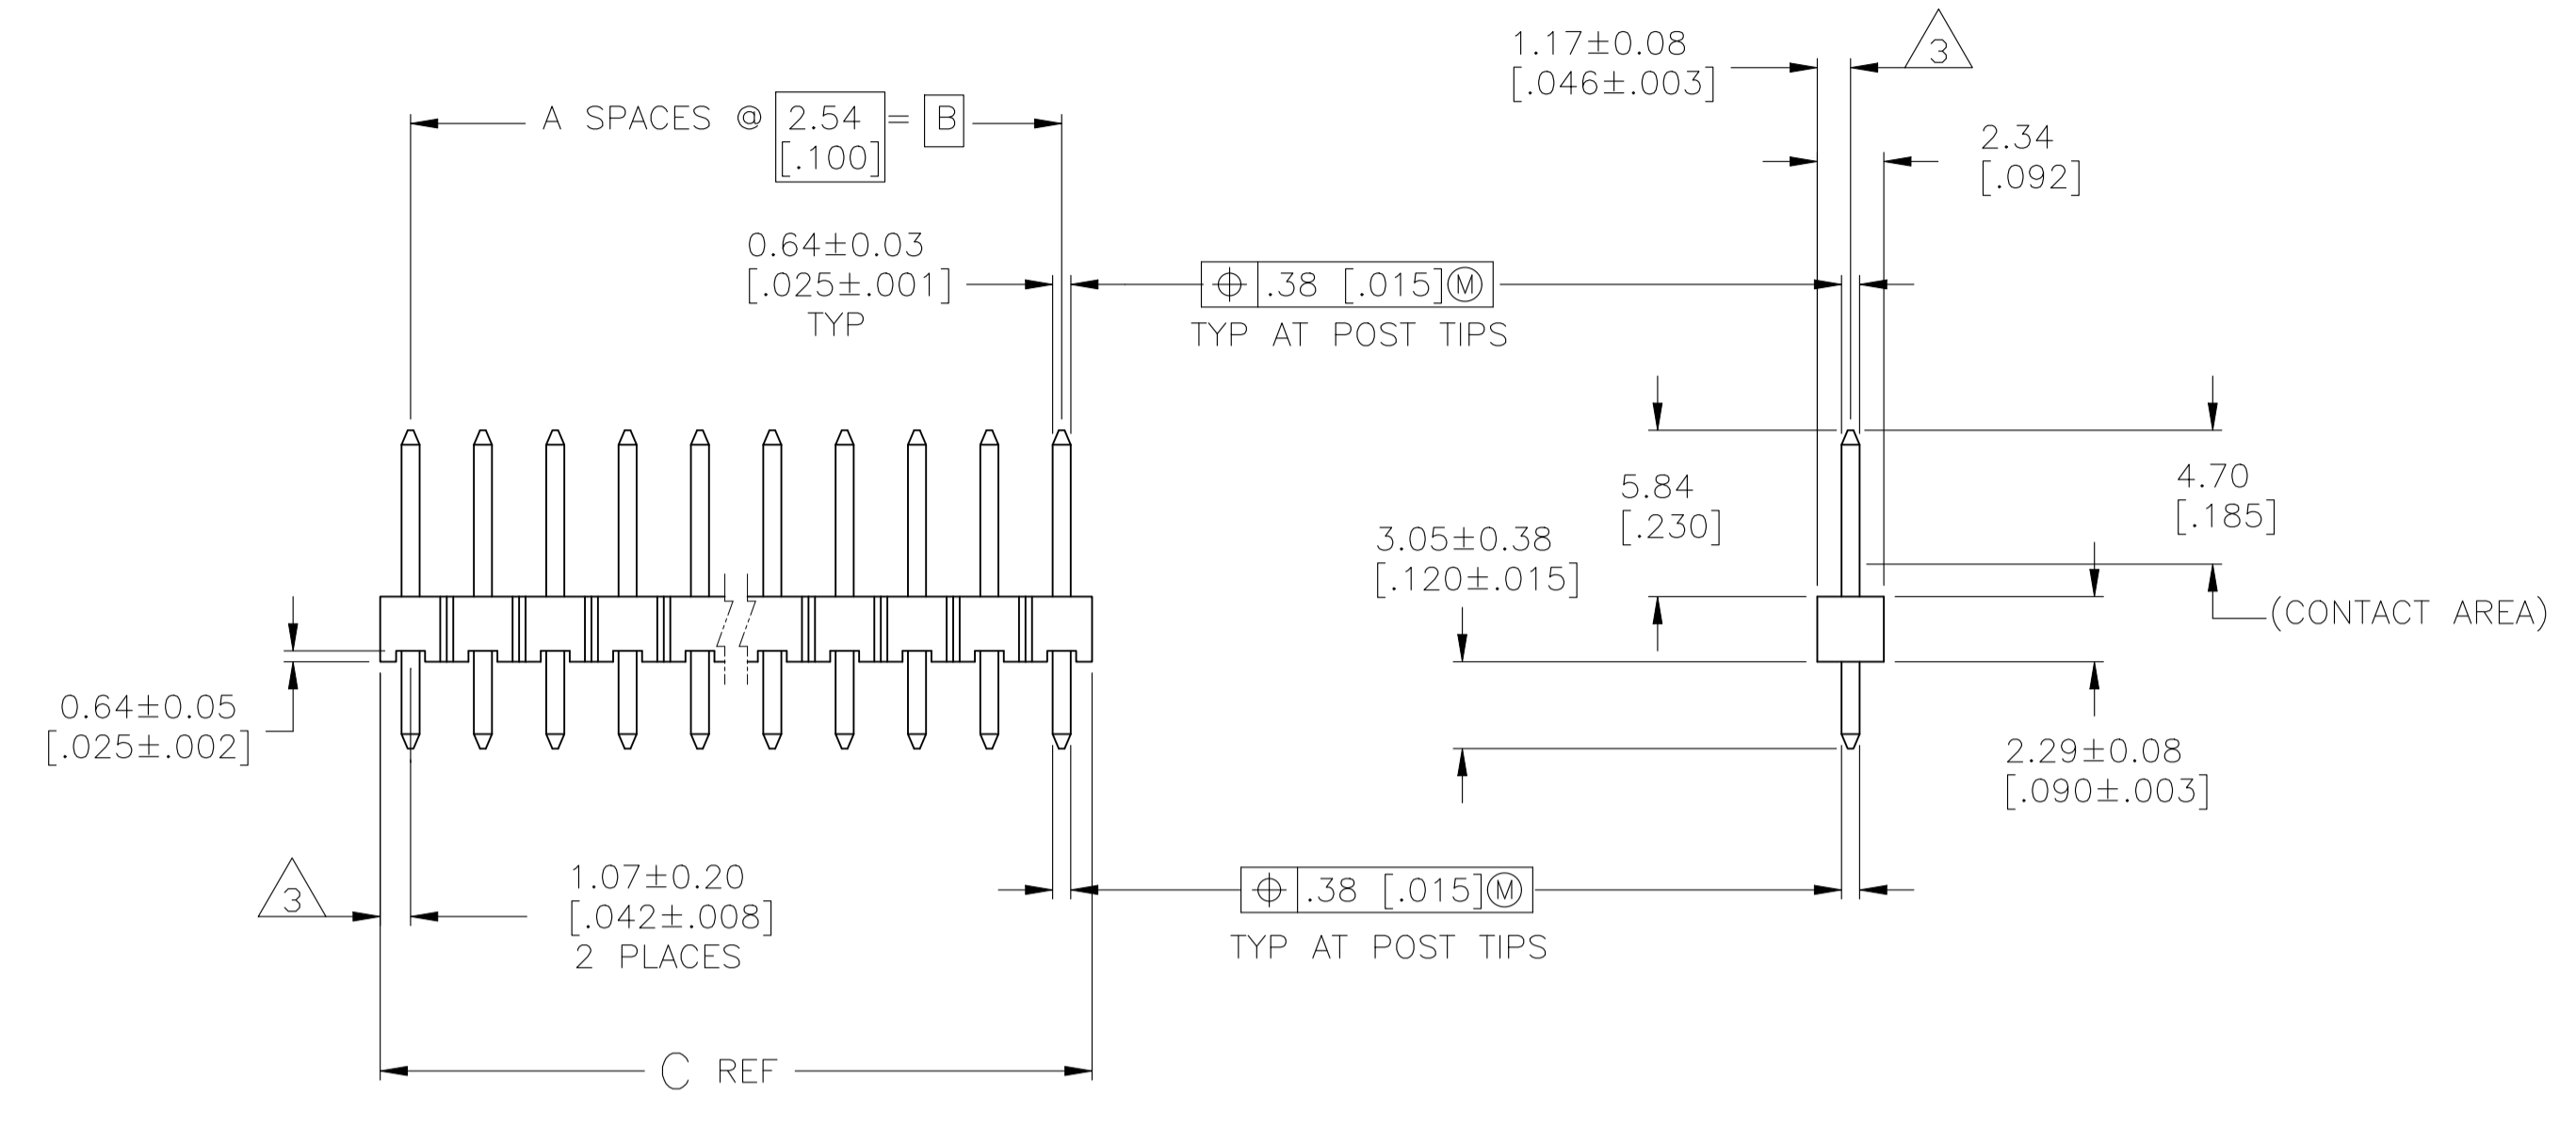

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

OBSOLETE

OBSOLETE

OBSOLETE

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
6	101.19 [3.984]	99.06 [3.900]	39	40	9-146278-0
6	98.65 [3.884]	96.52 [3.800]	38	39	8-146278-9
6	96.11 [3.784]	93.98 [3.700]	37	38	8-146278-8
6	93.57 [3.684]	91.44 [3.600]	36	37	8-146278-7
6	91.03 [3.584]	88.90 [3.500]	35	36	8-146278-6
6	88.49 [3.484]	86.36 [3.400]	34	35	8-146278-5
6	85.95 [3.384]	83.82 [3.300]	33	34	8-146278-4
6	83.41 [3.284]	81.28 [3.200]	32	33	8-146278-3
6	80.87 [3.184]	78.74 [3.100]	31	32	8-146278-2
6	78.33 [3.084]	76.20 [3.000]	30	31	8-146278-1
6	75.79 [2.984]	73.66 [2.900]	29	30	8-146278-0
6	73.25 [2.884]	71.12 [2.800]	28	29	7-146278-9
6	70.71 [2.784]	68.58 [2.700]	27	28	7-146278-8
6	68.17 [2.684]	66.04 [2.600]	26	27	7-146278-7
6	65.63 [2.584]	63.50 [2.500]	25	26	7-146278-6
6	63.09 [2.484]	60.96 [2.400]	24	25	7-146278-5
6	60.55 [2.384]	58.42 [2.300]	23	24	7-146278-4
6	58.01 [2.284]	55.88 [2.200]	22	23	7-146278-3
6	55.47 [2.184]	53.34 [2.100]	21	22	7-146278-2
6	52.93 [2.084]	50.80 [2.000]	20	21	7-146278-1
6	50.39 [1.984]	48.26 [1.900]	19	20	7-146278-0
6	47.85 [1.884]	45.72 [1.800]	18	19	6-146278-9
6	45.31 [1.784]	43.18 [1.700]	17	18	6-146278-8
6	42.77 [1.684]	40.64 [1.600]	16	17	6-146278-7
6	40.23 [1.584]	38.10 [1.500]	15	16	6-146278-6
6	37.69 [1.484]	35.56 [1.400]	14	15	6-146278-5
6	35.15 [1.384]	33.02 [1.300]	13	14	6-146278-4
6	32.61 [1.284]	30.48 [1.200]	12	13	6-146278-3
6	30.07 [1.184]	27.94 [1.100]	11	12	6-146278-2
6	27.53 [1.084]	25.40 [1.000]	10	11	6-146278-1
6	24.99 [0.984]	22.86 [0.900]	9	10	6-146278-0
6	22.45 [0.884]	20.32 [0.800]	8	9	5-146278-9
6	19.91 [0.784]	17.78 [0.700]	7	8	5-146278-8
6	17.37 [0.684]	15.24 [0.600]	6	7	5-146278-7
6	14.83 [0.584]	12.70 [0.500]	5	6	5-146278-6
6	12.29 [0.484]	10.16 [0.400]	4	5	5-146278-5
6	9.75 [0.384]	7.62 [0.300]	3	4	5-146278-4
6	7.21 [0.284]	5.08 [0.200]	2	3	5-146278-3
6	4.67 [0.184]	2.54 [0.100]	1	2	5-146278-2
6	2.13 [0.084]	-	0	1	5-146278-1

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER	
4	SUPERSEDED BY 9-146278-0	101.19 [3.984]	99.06 [3.900]	39	40	4-146278-0
4	OBSOLETE	98.65 [3.884]	96.52 [3.800]	38	39	7-146278-9
4		96.11 [3.784]	93.98 [3.700]	37	38	7-146278-8
4		93.57 [3.684]	91.44 [3.600]	36	37	7-146278-7
4		91.03 [3.584]	88.90 [3.500]	35	36	7-146278-6
4		88.49 [3.484]	86.36 [3.400]	34	35	7-146278-5
4		85.95 [3.384]	83.82 [3.300]	33	34	7-146278-4
4		83.41 [3.284]	81.28 [3.200]	32	33	7-146278-3
4		80.87 [3.184]	78.74 [3.100]	31	32	7-146278-2
4		78.33 [3.084]	76.20 [3.000]	30	31	7-146278-1
4		75.79 [2.984]	73.66 [2.900]	29	30	7-146278-0
4		73.25 [2.884]	71.12 [2.800]	28	29	7-146278-9
4		70.71 [2.784]	68.58 [2.700]	27	28	7-146278-8
4		68.17 [2.684]	66.04 [2.600]	26	27	7-146278-7
4		65.63 [2.584]	63.50 [2.500]	25	26	7-146278-6
4		63.09 [2.484]	60.96 [2.400]	24	25	7-146278-5
4		60.55 [2.384]	58.42 [2.300]	23	24	7-146278-4
4		58.01 [2.284]	55.88 [2.200]	22	23	7-146278-3
4		55.47 [2.184]	53.34 [2.100]	21	22	7-146278-2
4		52.93 [2.084]	50.80 [2.000]	20	21	7-146278-1
4		50.39 [1.984]	48.26 [1.900]	19	20	7-146278-0
4		47.85 [1.884]	45.72 [1.800]	18	19	7-146278-9
4		45.31 [1.784]	43.18 [1.700]	17	18	7-146278-8
4		42.77 [1.684]	40.64 [1.600]	16	17	7-146278-7
4		40.23 [1.584]	38.10 [1.500]	15	16	7-146278-6
4		37.69 [1.484]	35.56 [1.400]	14	15	7-146278-5
4	SUPERSEDED BY 6-146278-4	35.15 [1.384]	33.02 [1.300]	13	14	7-146278-4
4		32.61 [1.284]	30.48 [1.200]	12	13	7-146278-3
4	SUPERSEDED BY 6-146278-2	30.07 [1.184]	27.94 [1.100]	11	12	7-146278-2
4		27.53 [1.084]	25.40 [1.000]	10	11	7-146278-1
4		24.99 [0.984]	22.86 [0.900]	9	10	7-146278-0
4		22.45 [0.884]	20.32 [0.800]	8	9	7-146278-9
4	SUPERSEDED BY 5-146278-8	19.91 [0.784]	17.78 [0.700]	7	8	7-146278-8
4		17.37 [0.684]	15.24 [0.600]	6	7	7-146278-7
4	SUPERSEDED BY 5-146278-6	14.83 [0.584]	12.70 [0.500]	5	6	7-146278-6
4	SUPERSEDED BY 5-146278-5	12.29 [0.484]	10.16 [0.400]	4	5	7-146278-5
4	SUPERSEDED BY 5-146278-4	9.75 [0.384]	7.62 [0.300]	3	4	7-146278-4
4	SUPERSEDED BY 5-146278-3	7.21 [0.284]	5.08 [0.200]	2	3	7-146278-3
4	SUPERSEDED BY 5-146278-2	4.67 [0.184]	2.54 [0.100]	1	2	7-146278-2
4	SUPERSEDED BY 5-146278-1	2.13 [0.084]	-	0	1	7-146278-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN T. HOFFMAN 23 MAY 95	TE Connectivity
0. PLC ± -	1. PLC ± 0.127 [0.005]	CHK G. DUBNICZKI 07 JUN 95	NAME
2. PLC ± 0.254 [0.010]	3. PLC ± 0.127 [0.005]	APPRO G. DUBNICZKI 07 JUN 95	PRODUCT SPEC
4. PLC ± 0.127 [0.005]	ANGLES ±	APPLICATION SPEC	SIZE
MATERIAL	FINISH SEE TABLE	WEIGHT	CAGE CODE DRAWING NO
			A1 00779 C=146278
		CUSTOMER DRAWING	RESTRICTED TO
		SCALE 4:1	SHEET 1 of 1 REV H4