

THIS MODULE HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

OPERATING SPECIFICATIONS

LINE FREQUENCY: 50-60Hz



STORAGE TEMPERATURE: -40°C TO $+85^{\circ}\text{C}$
HUMIDITY: 21 DAYS @ 40°C 95% RH.
CURRENT OVERLOAD TEST: 6 TIMES I_F FOR
8 SECONDS

L/G AND L/L I.R. @ 6000M (MIN.) 100VDC,
20°C AND 50% RH




CATALOG # 6ESRF-3

ECN#	APPRVD	DATE
10-006842	BG	31MAR10

LINE TO GROUND: 1500 VAC FOR 1 MINUTE
LINE TO LINE: 1450 VDC FOR 1 MINUTE

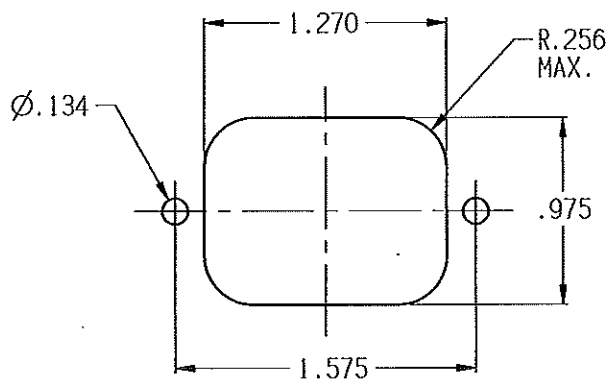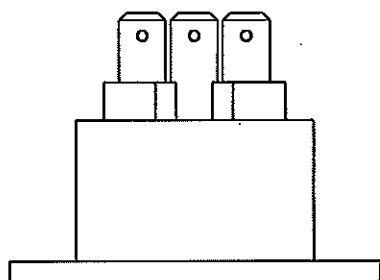

RECOMMENDED PANEL CUTOUT

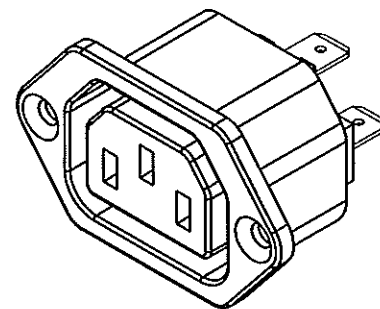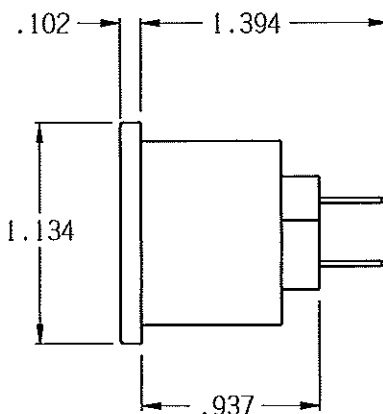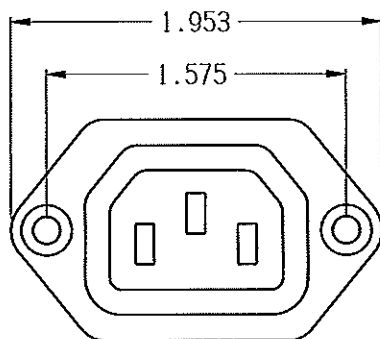

50 Ω - 50 Ω (MINIMUM) INSERTION LOSS													PARTS SHALL COMPLY WITH TYCO ELECTRONICS 138-702 SPECIFICATION FOR HAZARDOUS SUBSTANCES																
FREQUENCY MHz	/	/	/	/	/	/	/	/	/	/	/	/	UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE ±0.025 MATERIAL & FINISH: AS SUPPLIED										 Tyco Electronics CORCON PRODUCTS, 620 S. BUTTERFIELD RD. MUNDLEIN IL 60060						
COMMON dB	/	/	/	/	/	/	/	/	/	/	/	/																	
DIFF. dB	/	/	/	/	/	/	/	/	/	/	/	/																	
SHEET SIZE		THIRD ANGLE PROJECTION		THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION. HARRISBURG, PENNSYLVANIA											NOTES:				CUSTOMER DRAWING										
A																													
													#ESRF-3-A.rtd				TYCO ELECTRONICS PART NO. 1609133-1												
													SCALE: 1:1				DATE: 17FEB10				DRAWING NUMBER: 6ESRF-3				REV. B				
													DRW. BY: J.JD				ORIG: /												