

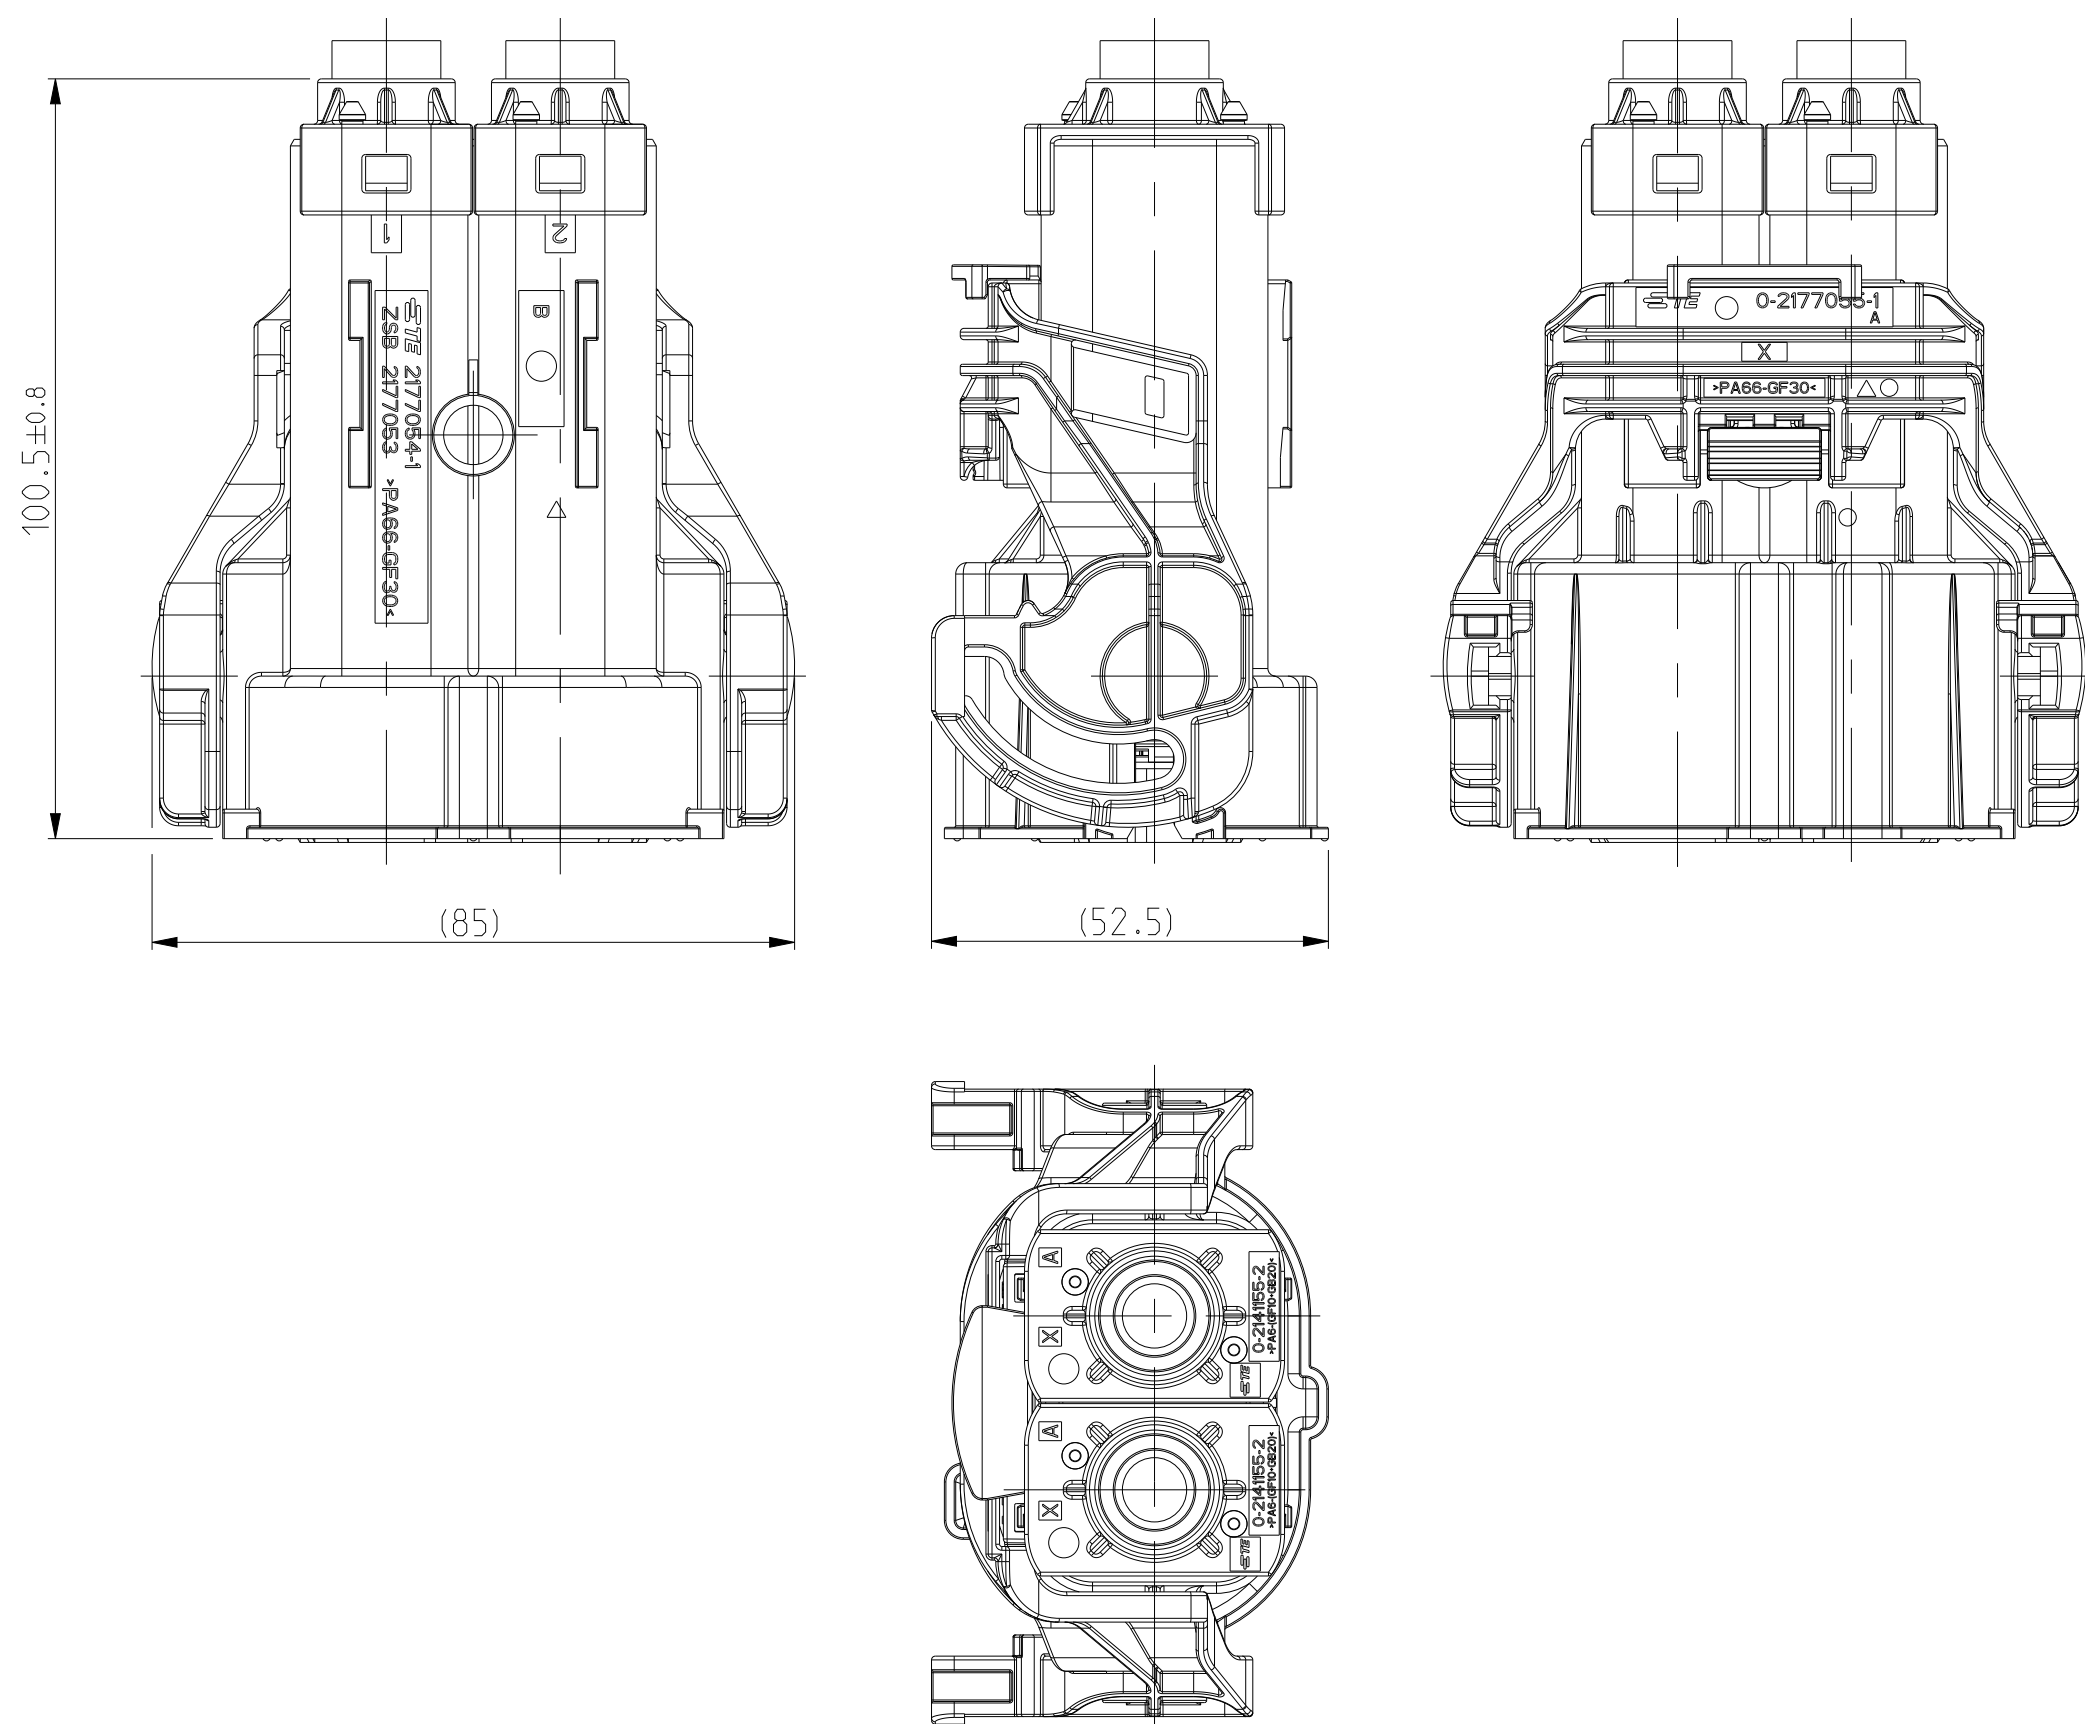


LEVER OPERATION SIDE ○  
Hebel Betaetigungsseite

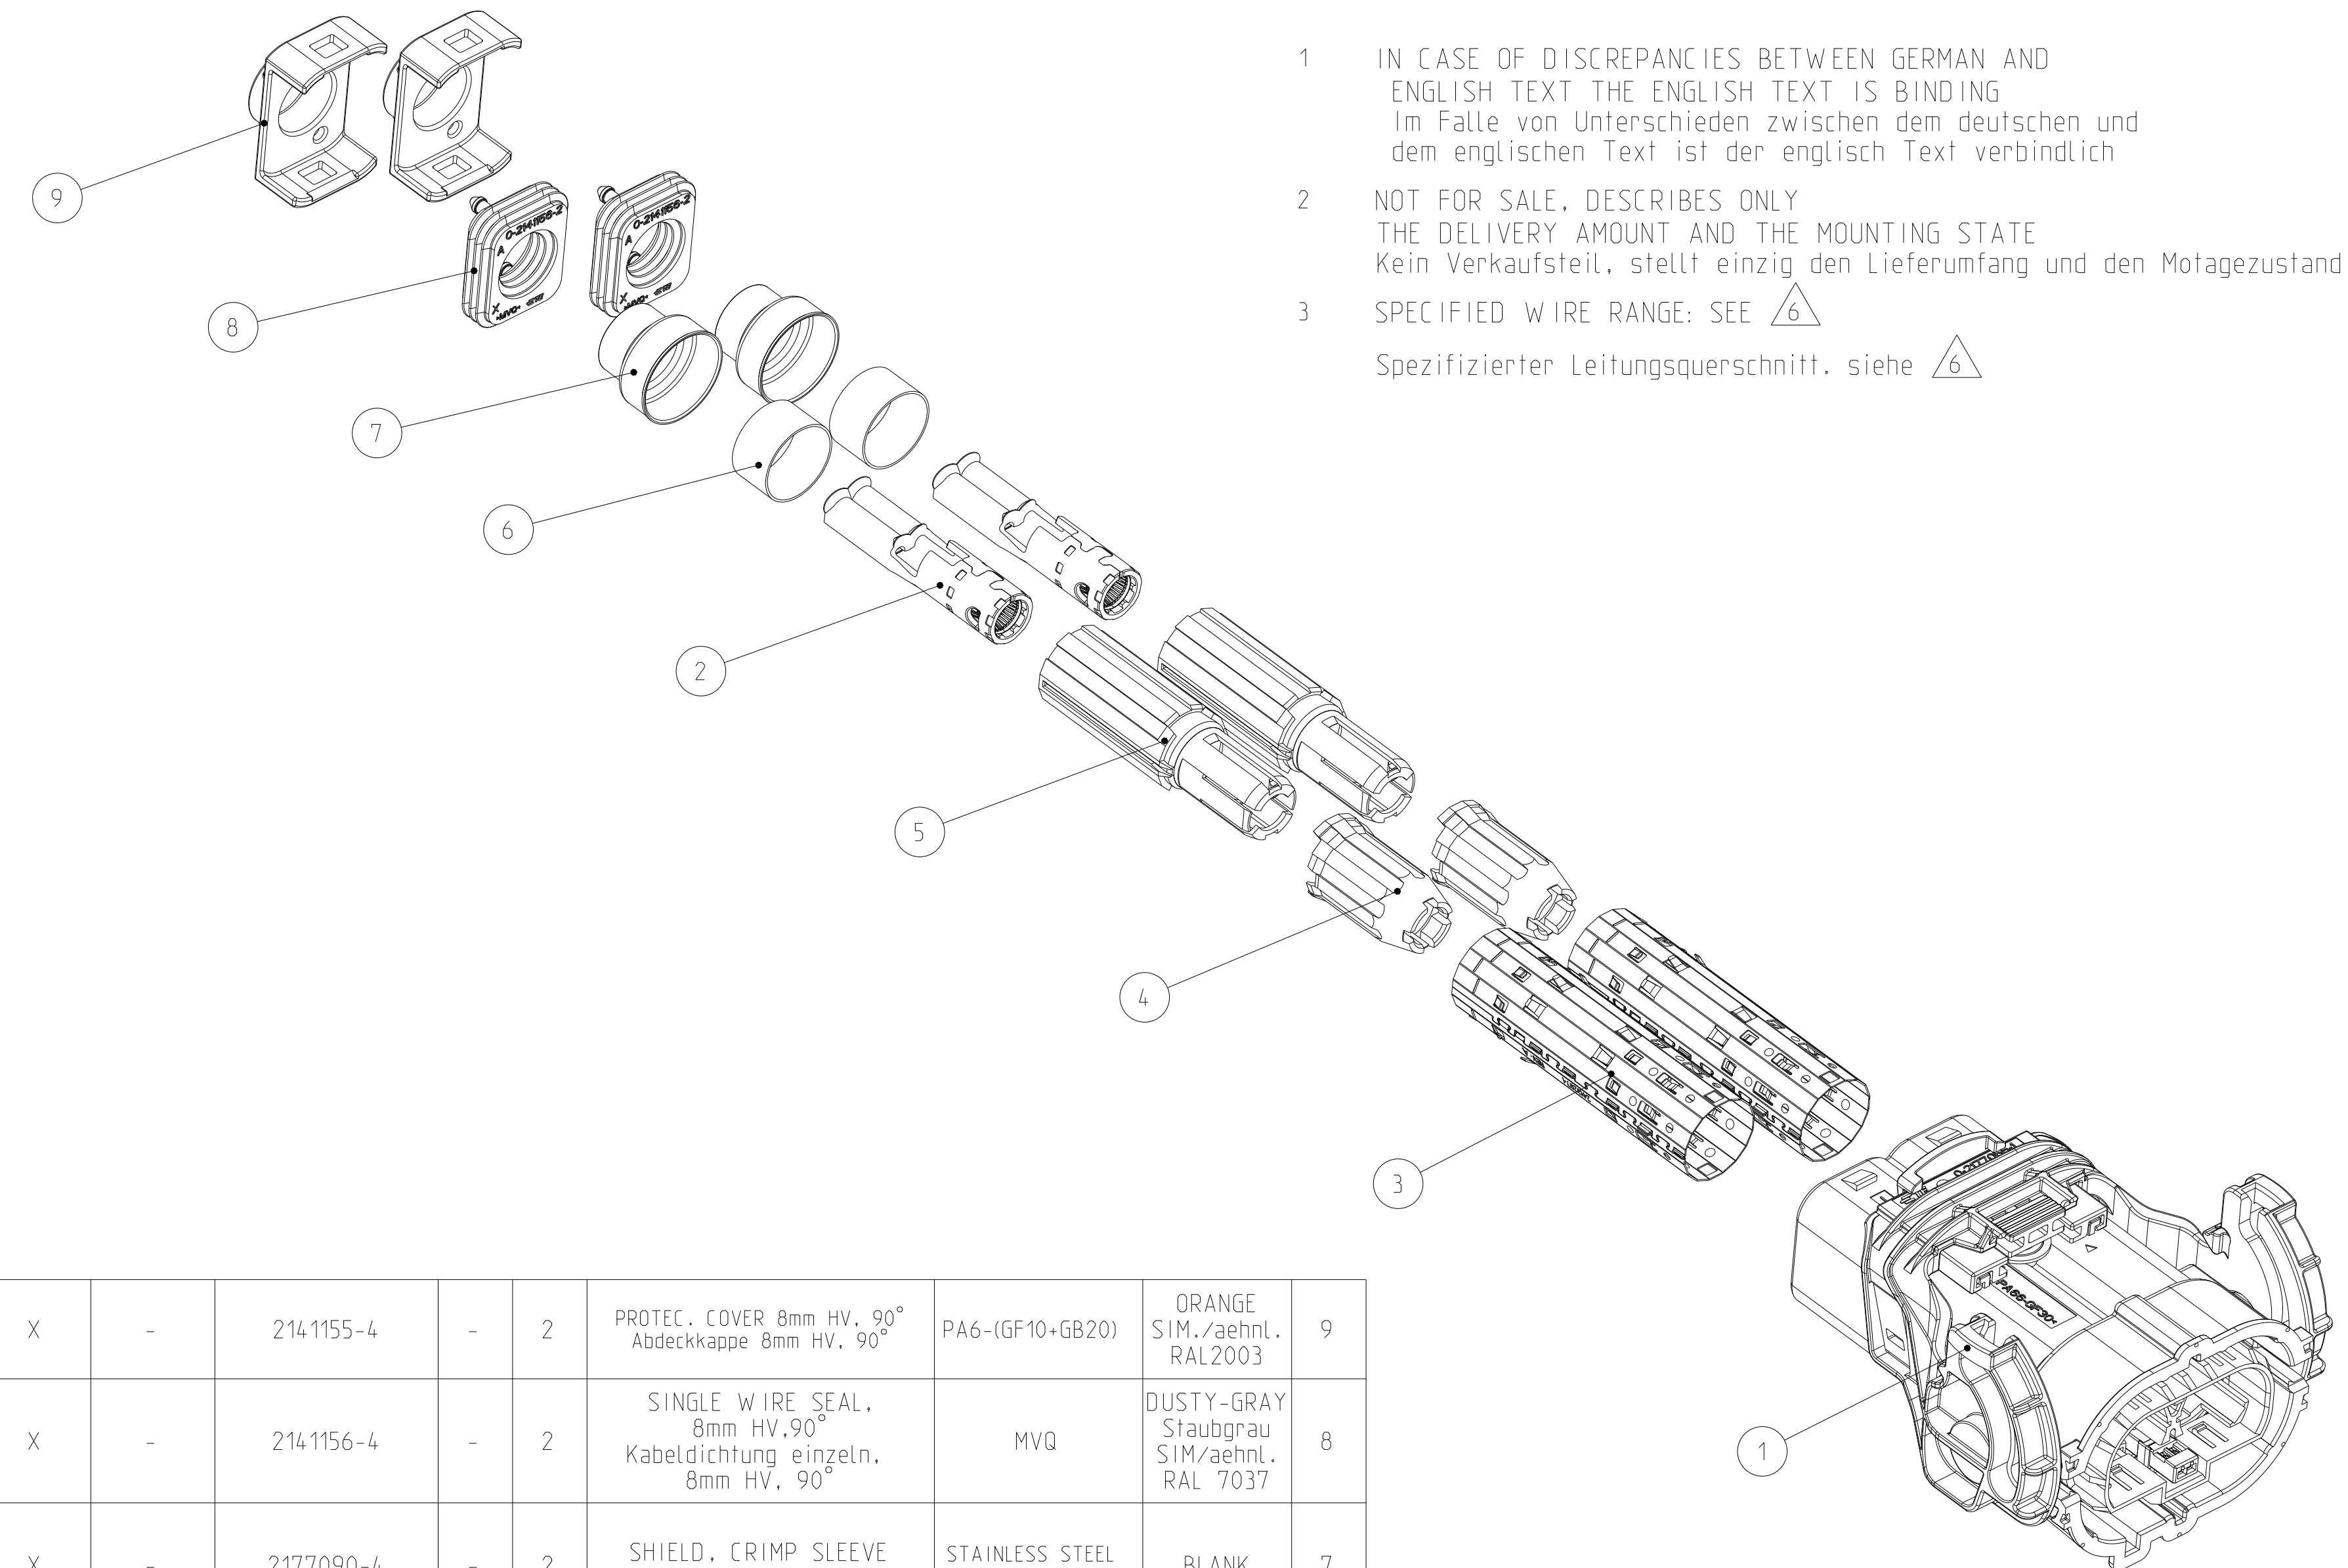

LEVER OPERATION SIDE △  
Hebel Betaetigungsseite

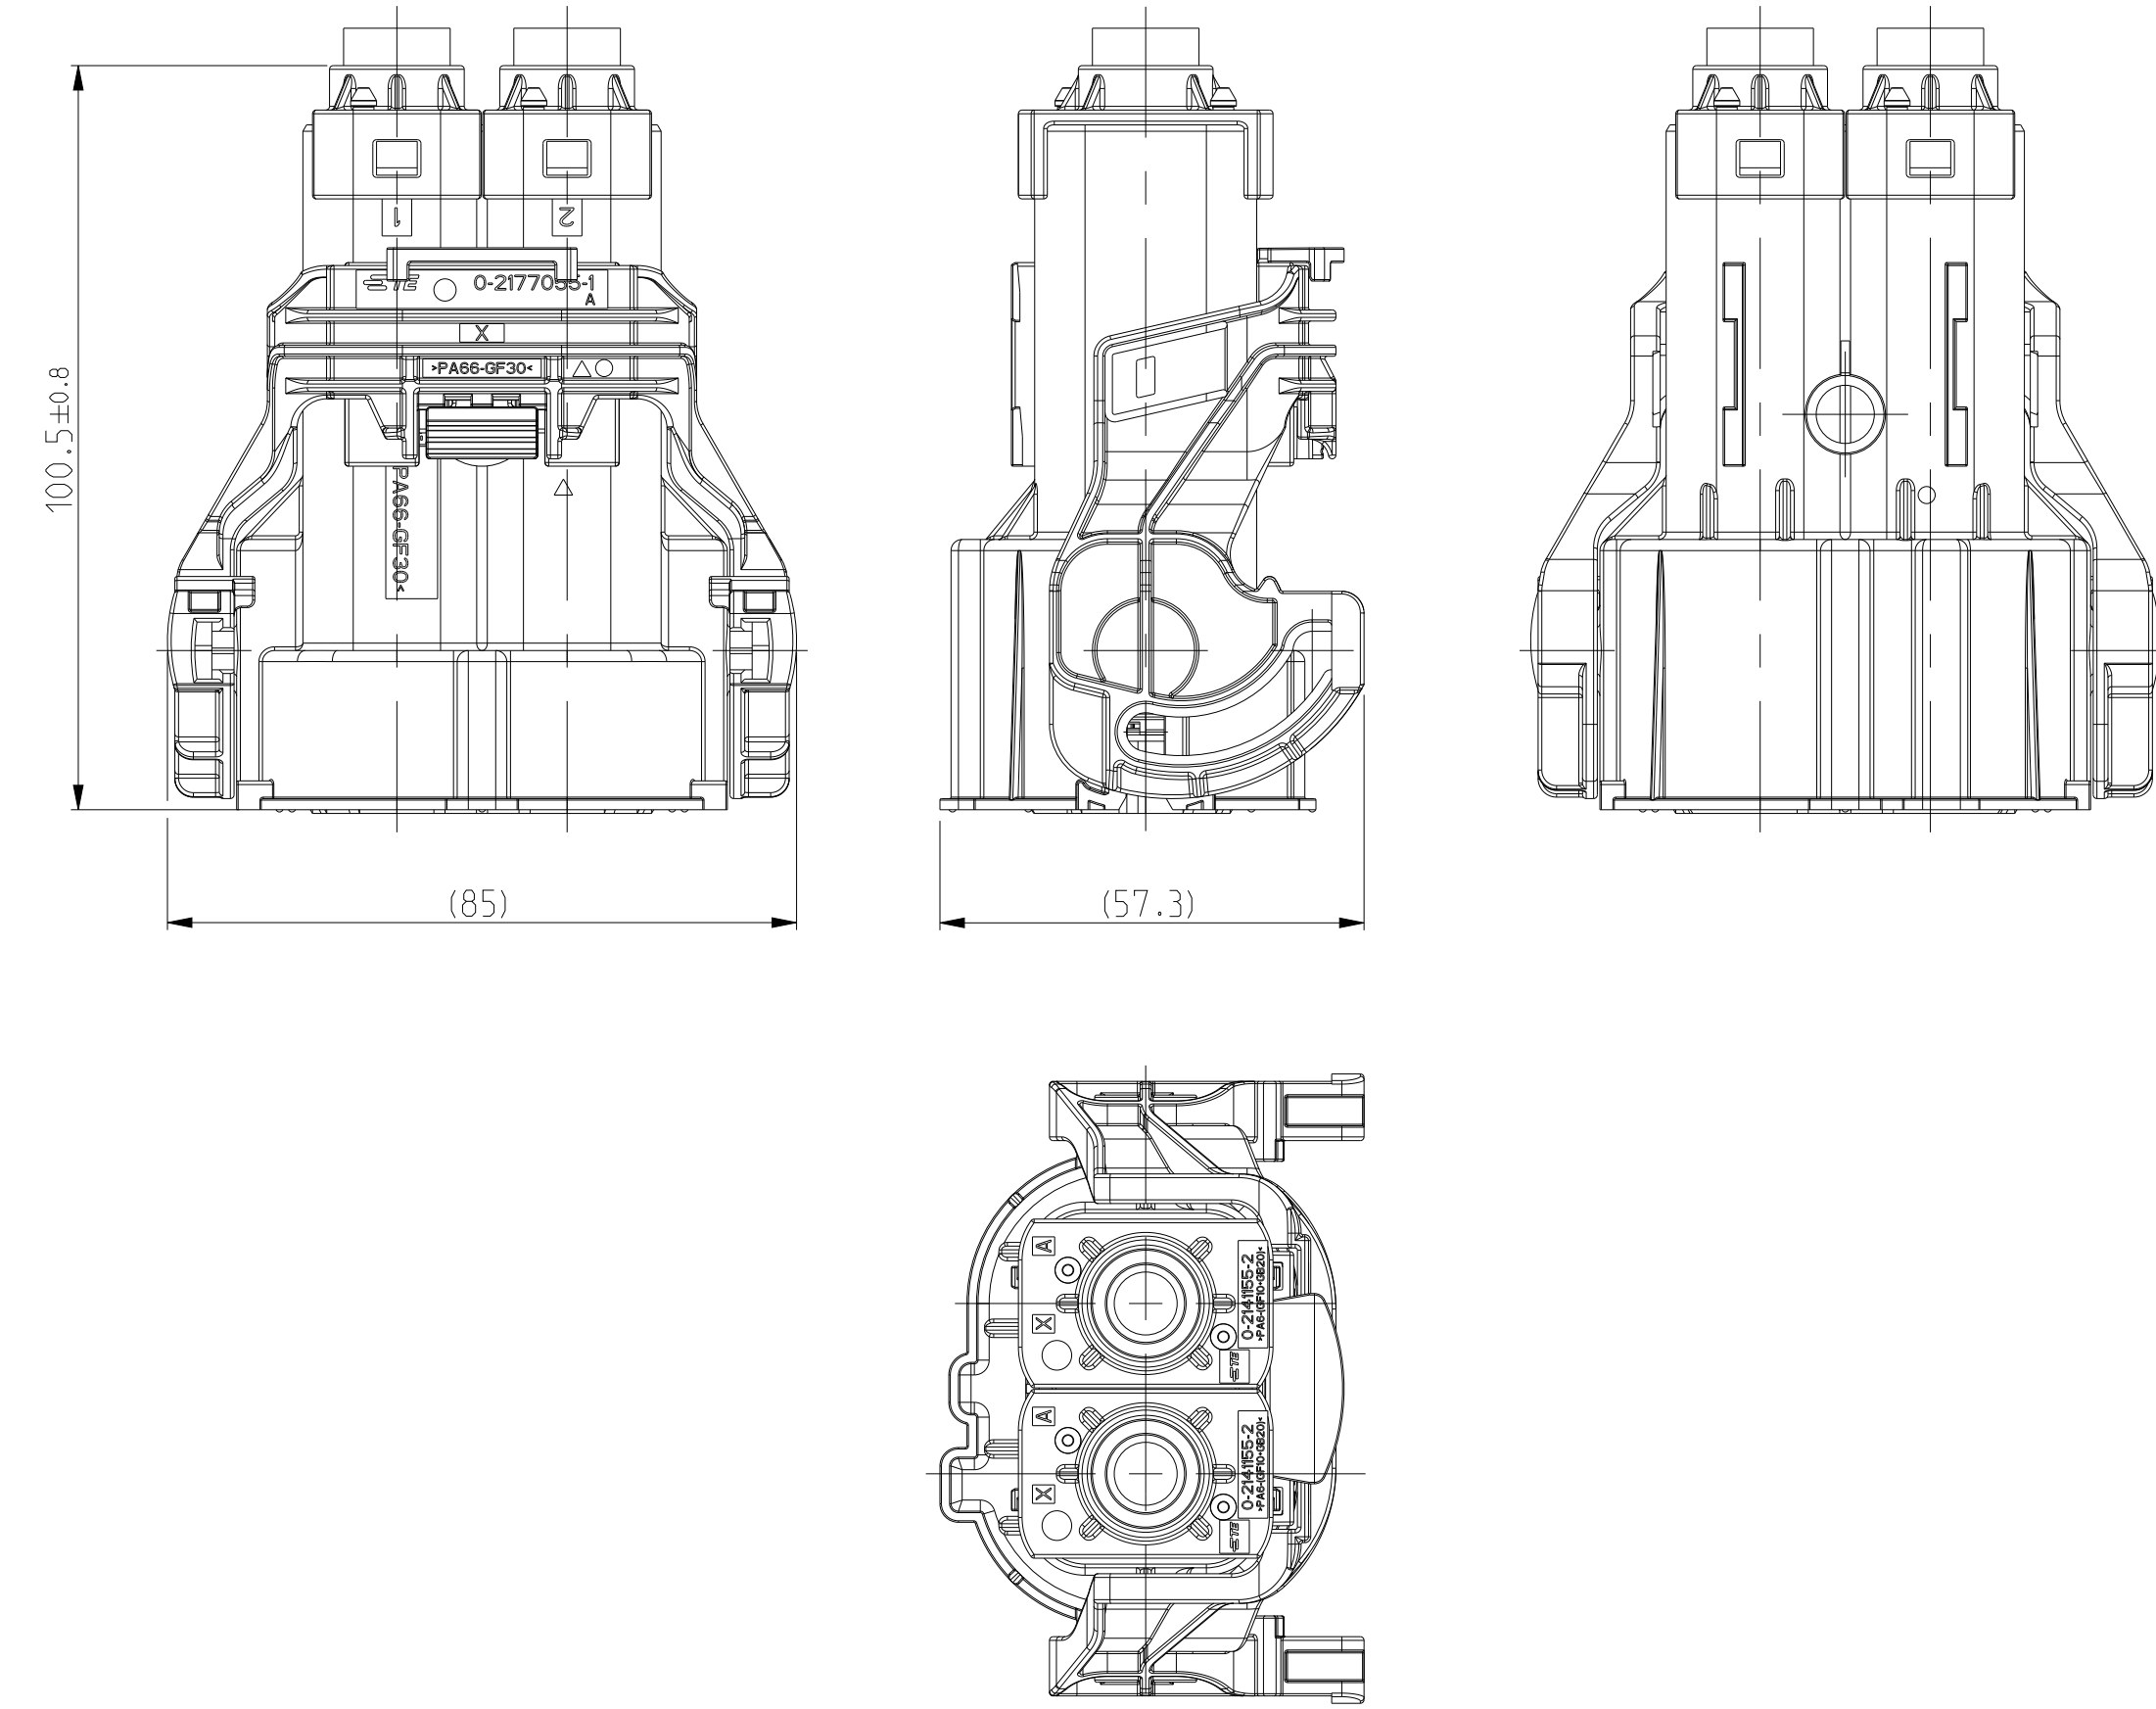

- IN CASE OF DISCREPANCIES BETWEEN GERMAN AND ENGLISH TEXT THE ENGLISH TEXT IS BINDING  
Im Falle von Unterschieden zwischen dem deutschen und dem englischen Text ist der englisch Text verbindlich
- NOT FOR SALE. DESCRIBES ONLY THE DELIVERY AMOUNT AND THE MOUNTING STATE  
Kein Verkaufsteil. stellt einzig den Lieferumfang und den Montagezustand dar
- SPECIFIED WIRE RANGE: SEE △  
Spezifizierter Leitungsquerschnitt. siehe △


REVISIONS				
NO.	DATE	DESCRIPTION	BY	APPD.
A4	2177060-3 replaced with 2177060-4		SK	TS
A5	Streamlined the drawing as per latest format		JJM	MH
A6	Added new shielding PN 2413297-1 in page 3-4		JJM	MH
A7	Sheet 1 and 2 are excluded		JJM	JK

VERSION	CODE A	CODE B	CODE C	CODE D	CODE A	CODE B	CODE C	CODE D	MASS (g) Masse (g)	TE ORDER-NO. Bestell-Nr.:	CODE	QTY	PART DESCRIPTION Benennung Einzelteil	MATERIAL Werkstoff	COLOUR Farbe	ITEM
	○	○	○	○	△	△	△	△								
	X	X	X	X	X	X	X	X	-	2141155-2	-	2	PROTEC. COVER 8mm HV, 90° Abdeckkappe 8mm HV, 90°	PA6-(GF10-GB20)	ORANGE SIM./aehnl. RAL2003	9
	X	X	X	X	X	X	X	X	-	2141156-2	-	2	SINGLE WIRE SEAL. 8mm HV, 90° Kabeldichtung einzeln, 8mm HV, 90°	MVQ	NATURAL Transparent	8
	X	X	X	X	X	X	X	X	-	2177090-2	-	2	SHIELD, CRIMP SLEEVE Schirm, Crimpbuchse	STAINLESS STEEL Edelstahl	BLANK	7
	X	X	X	X	X	X	X	X	-	2177061-1 Alternative 2177061-2	-	2	SHIELD CRIMP FERRULE, INNER Untercrimphülse	STAINLESS STEEL Edelstahl	BLANK	6
	X	X	X	X	X	X	X	X	-	2177058-1	-	2	INSULATION INSERT, 180° Isolationskoerper, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL 2003	5
	X	X	X	X	X	X	X	X	-	2177059-1	-	2	FINGER PROT CAP 8mm HV, 180° Fingerschutzkappe 8mm HV, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL2003	4
	X	X	X	X	X	X	X	X	-	2413297-1	-	2	SHIELDING SLEEVE, 180° Schirmhülse, 180°	CU - ALLOY Cu - Legierung	SELECTED SILVER- PLATED	3
	X	X	X	X	X	X	X	X	-	2208608-3	-	2	HV8mm SOCKET TERMINAL Kontaktbuchse, 180°	siehe C-2351897	-	2
	-	-	-	X	-	-	-	-	-	1-2177053-8	D	-	2POS, 8mm HV, REC HSG, 180°, ASSY, SEALED 2pol, gedichtete Assy, 8mm HV, 180°	siehe C-2177053	siehe C-2177053	1
	-	-	X	-	-	-	-	-	-	1-2177053-6	C	-				
	-	X	-	-	-	-	-	-	-	1-2177053-4	B	-				
	X	-	-	-	-	-	-	-	-	1-2177053-2	A	-				
	-	-	-	-	-	-	X	-	-	1-2177053-7	D	-				
	-	-	-	-	-	X	-	-	-	1-2177053-5	C	-				
	-	-	-	-	X	-	-	-	-	1-2177053-3	B	-				
	-	-	-	X	-	-	-	-	-	1-2177053-1	A	-				
	-	-	-	X	-	-	-	-	-	1-2177053-1	A	-				

VERSION	CODE A	CODE B	CODE C	CODE D	CODE A	CODE B	CODE C	CODE D	MASS (g) Masse (g)	TE ORDER-NO. Bestell-Nr.:	CODE	QTY	PART DESCRIPTION Benennung Einzelteil	MATERIAL Werkstoff	COLOUR Farbe	ITEM
	○	○	○	○	△	△	△	△								
	X	X	X	X	X	X	X	X	-	2141155-1	-	2	PROTEC. COVER 8mm HV, 90° Abdeckkappe 8mm HV, 90°	PA6-(GF10-GB20)	ORANGE SIM./aehnl. RAL2003	9
	X	X	X	X	X	X	X	X	-	2141156-1	-	2	SINGLE WIRE SEAL. 8mm HV, 90° Kabeldichtung einzeln, 8mm HV, 90°	MVQ	GRASS GREEN Grasgruen SIM./aehnl. RAL 6010	8
	X	X	X	X	X	X	X	X	-	2177090-1	-	2	SHIELD, CRIMP SLEEVE Schirm, Crimpbuchse	STAINLESS STEEL Edelstahl	BLANK	7
	X	X	X	X	X	X	X	X	-	2177061-1 Alternative 2177061-2	-	2	SHIELD CRIMP FERRULE, INNER Untercrimphülse	STAINLESS STEEL Edelstahl	BLANK	6
	X	X	X	X	X	X	X	X	-	2177058-1	-	2	INSULATION INSERT, 180° Isolationskoerper, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL 2003	5
	X	X	X	X	X	X	X	X	-	2177059-1	-	2	FINGER PROT CAP 8mm HV, 180° Fingerschutzkappe 8mm HV, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL2003	4
	X	X	X	X	X	X	X	X	-	2413297-1	-	2	SHIELDING SLEEVE, 180° Schirmhülse, 180°	CU - ALLOY Cu - Legierung	SELECTED SILVER- PLATED	3
	X	X	X	X	X	X	X	X	-	2208608-3	-	2	HV8mm SOCKET TERMINAL Kontaktbuchse, 180°	siehe C-2351897	-	2
	-	-	-	X	-	-	-	-	-	1-2177053-8	D	-	2POS, 8mm HV, REC HSG, 180°, ASSY, SEALED 2pol, gedichtete Assy, 8mm HV, 180°	siehe C-2177053	siehe C-2177053	1
	-	-	X	-	-	-	-	-	-	1-2177053-6	C	-				
	-	X	-	-	-	-	-	-	-	1-2177053-4	B	-				
	X	-	-	-	-	-	-	-	-	1-2177053-2	A	-				
	-	-	-	-	-	-	X	-	-	1-2177053-7	D	-				
	-	-	-	-	-	X	-	-	-	1-2177053-5	C	-				
	-	-	-	-	X	-	-	-	-	1-2177053-3	B	-				
	-	-	-	X	-	-	-	-	-	1-2177053-1	A	-				
	-	-	-	X	-	-	-	-	-	1-2177053-1	A	-				

VERSION	CODE A	CODE B	CODE C	CODE D	CODE A	CODE B	CODE C	CODE D	MASS (g) Masse (g)	TE ORDER-NO. Bestell-Nr.:	CODE	QTY	PART DESCRIPTION Benennung Einzelteil	MATERIAL Werkstoff	COLOUR Farbe	ITEM
	○	○	○	○	△	△	△	△								
	X	X	X	X	X	X	X	X	-	2141155-4	-	2	PROTEC. COVER 8mm HV, 90° Abdeckkappe 8mm HV, 90°	PA6-(GF10-GB20)	ORANGE SIM./aehnl. RAL2003	9
	X	X	X	X	X	X	X	X	-	2141156-4	-	2	SINGLE WIRE SEAL. 8mm HV, 90° Kabeldichtung einzeln, 8mm HV, 90°	MVQ	DUSTY-GRAY Staubgrau SIM./aehnl. RAL 7037	8
	X	X	X	X	X	X	X	X	-	2177090-4	-	2	SHIELD, CRIMP SLEEVE Schirm, Crimpbuchse	STAINLESS STEEL Edelstahl	BLANK	7
	X	X	X	X	X	X	X	X	-	2177061-1 Alternative 2177061-2	-	2	SHIELD CRIMP FERRULE, INNER Untercrimphülse	STAINLESS STEEL Edelstahl	BLANK	6
	X	X	X	X	X	X	X	X	-	2177058-1	-	2	INSULATION INSERT, 180° Isolationskoerper, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL 2003	5
	X	X	X	X	X	X	X	X	-	2177059-1	-	2	FINGER PROT CAP 8mm HV, 180° Fingerschutzkappe 8mm HV, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL2003	4
	X	X	X	X	X	X	X	X	-	2413297-1	-	2	SHIELDING SLEEVE, 180° Schirmhülse, 180°	CU - ALLOY Cu - Legierung	SELECTED SILVER- PLATED	3
	X	X	X	X	X	X	X	X	-	2208669-3	-	2	HV8mm SOCKET TERMINAL Kontaktbuchse, 180°	siehe C-2351897	-	2
	-	-	-	X	-	-	-	-	-	1-2177053-8	D	-	2POS, 8mm HV, REC HSG, 180°, ASSY, SEALED 2pol, gedichtete Assy, 8mm HV, 180°	siehe C-2177053	siehe C-2177053	1
	-	-	X	-	-	-	-	-	-	1-2177053-6	C	-				
	-	X	-	-	-	-	-	-	-	1-2177053-4	B	-				
	X	-	-	-	-	-	-	-	-	1-2177053-2	A	-				
	-	-	-	-	-	-	X	-	-	1-2177053-7	D	-				
	-	-	-	-	-	X	-	-	-	1-2177053-5	C	-				
	-	-	-	-	-	X	-	-	-	1-2177053-3	B	-				
	-	-	-	-	X	-	-	-	-	1-2177053-1	A	-				
	-	-	-	X	-	-	-	-	-	1-2177053-1	A	-				


VERSION	CODE A	CODE B	CODE C	CODE D	CODE A	CODE B	CODE C	CODE D	MASS (g) Masse (g)	TE ORDER-NO. Bestell-Nr.:	CODE	QTY	PART DESCRIPTION Benennung Einzelteil	MATERIAL Werkstoff	COLOUR Farbe	ITEM
	○	○	○	○	△	△	△	△								
	X	X	X	X	X	X	X	X	-	2141155-3	-	2	PROTEC. COVER 8mm HV, 90° Abdeckkappe 8mm HV, 90°	PA6-(GF10-GB20)	ORANGE SIM./aehnl. RAL2003	9
	X	X	X	X	X	X	X	X	-	2141156-3	-	2	SINGLE WIRE SEAL. 8mm HV, 90° Kabeldichtung einzeln, 8mm HV, 90°	MVQ	WHITE/ Weiss SIM./aehnl. RAL 9010	8
	X	X	X	X	X	X	X	X	-	2177090-3	-	2	SHIELD, CRIMP SLEEVE Schirm, Crimpbuchse	STAINLESS STEEL Edelstahl	BLANK	7
	X	X	X	X	X	X	X	X	-	2177061-1 Alternative 2177061-2	-	2	SHIELD CRIMP FERRULE, INNER Untercrimphülse	STAINLESS STEEL Edelstahl	BLANK	6
	X	X	X	X	X	X	X	X	-	2177058-1	-	2	INSULATION INSERT, 180° Isolationskoerper, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL 2003	5
	X	X	X	X	X	X	X	X	-	2177059-1	-	2	FINGER PROT CAP 8mm HV, 180° Fingerschutzkappe 8mm HV, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL2003	4
	X	X	X	X	X	X	X	X	-	2413297-1	-	2	SHIELDING SLEEVE, 180° Schirmhülse, 180°	CU - ALLOY Cu - Legierung	SELECTED SILVER- PLATED	3
	X	X	X	X	X	X	X	X	-	2208669-3	-	2	HV8mm SOCKET TERMINAL Kontaktbuchse, 180°	siehe C-2351897	-	2
	-	-	-	X	-	-	-	-	-	1-2177053-8	D	-	2POS, 8mm HV, REC HSG, 180°, ASSY, SEALED 2pol, gedichtete Assy, 8mm HV, 180°	siehe C-2177053	siehe C-2177053	1
	-	-	X	-	-	-	-	-	-	1-2177053-6	C	-				
	-	X	-	-	-	-	-	-	-	1-2177053-4	B	-				
	X	-	-	-	-	-	-	-	-	1-2177053-2	A	-				
	-	-	-	-	-	-	X	-	-	1-2177053-7	D	-				
	-	-	-	-	-	X	-	-	-	1-2177053-5	C	-				
	-	-	-	-	-	X	-	-	-	1-2177053-3	B	-				
	-	-	-	-	X	-	-	-	-	1-2177053-1	A	-				
	-	-	-	X	-	-	-	-	-	1-2177053-1	A	-				

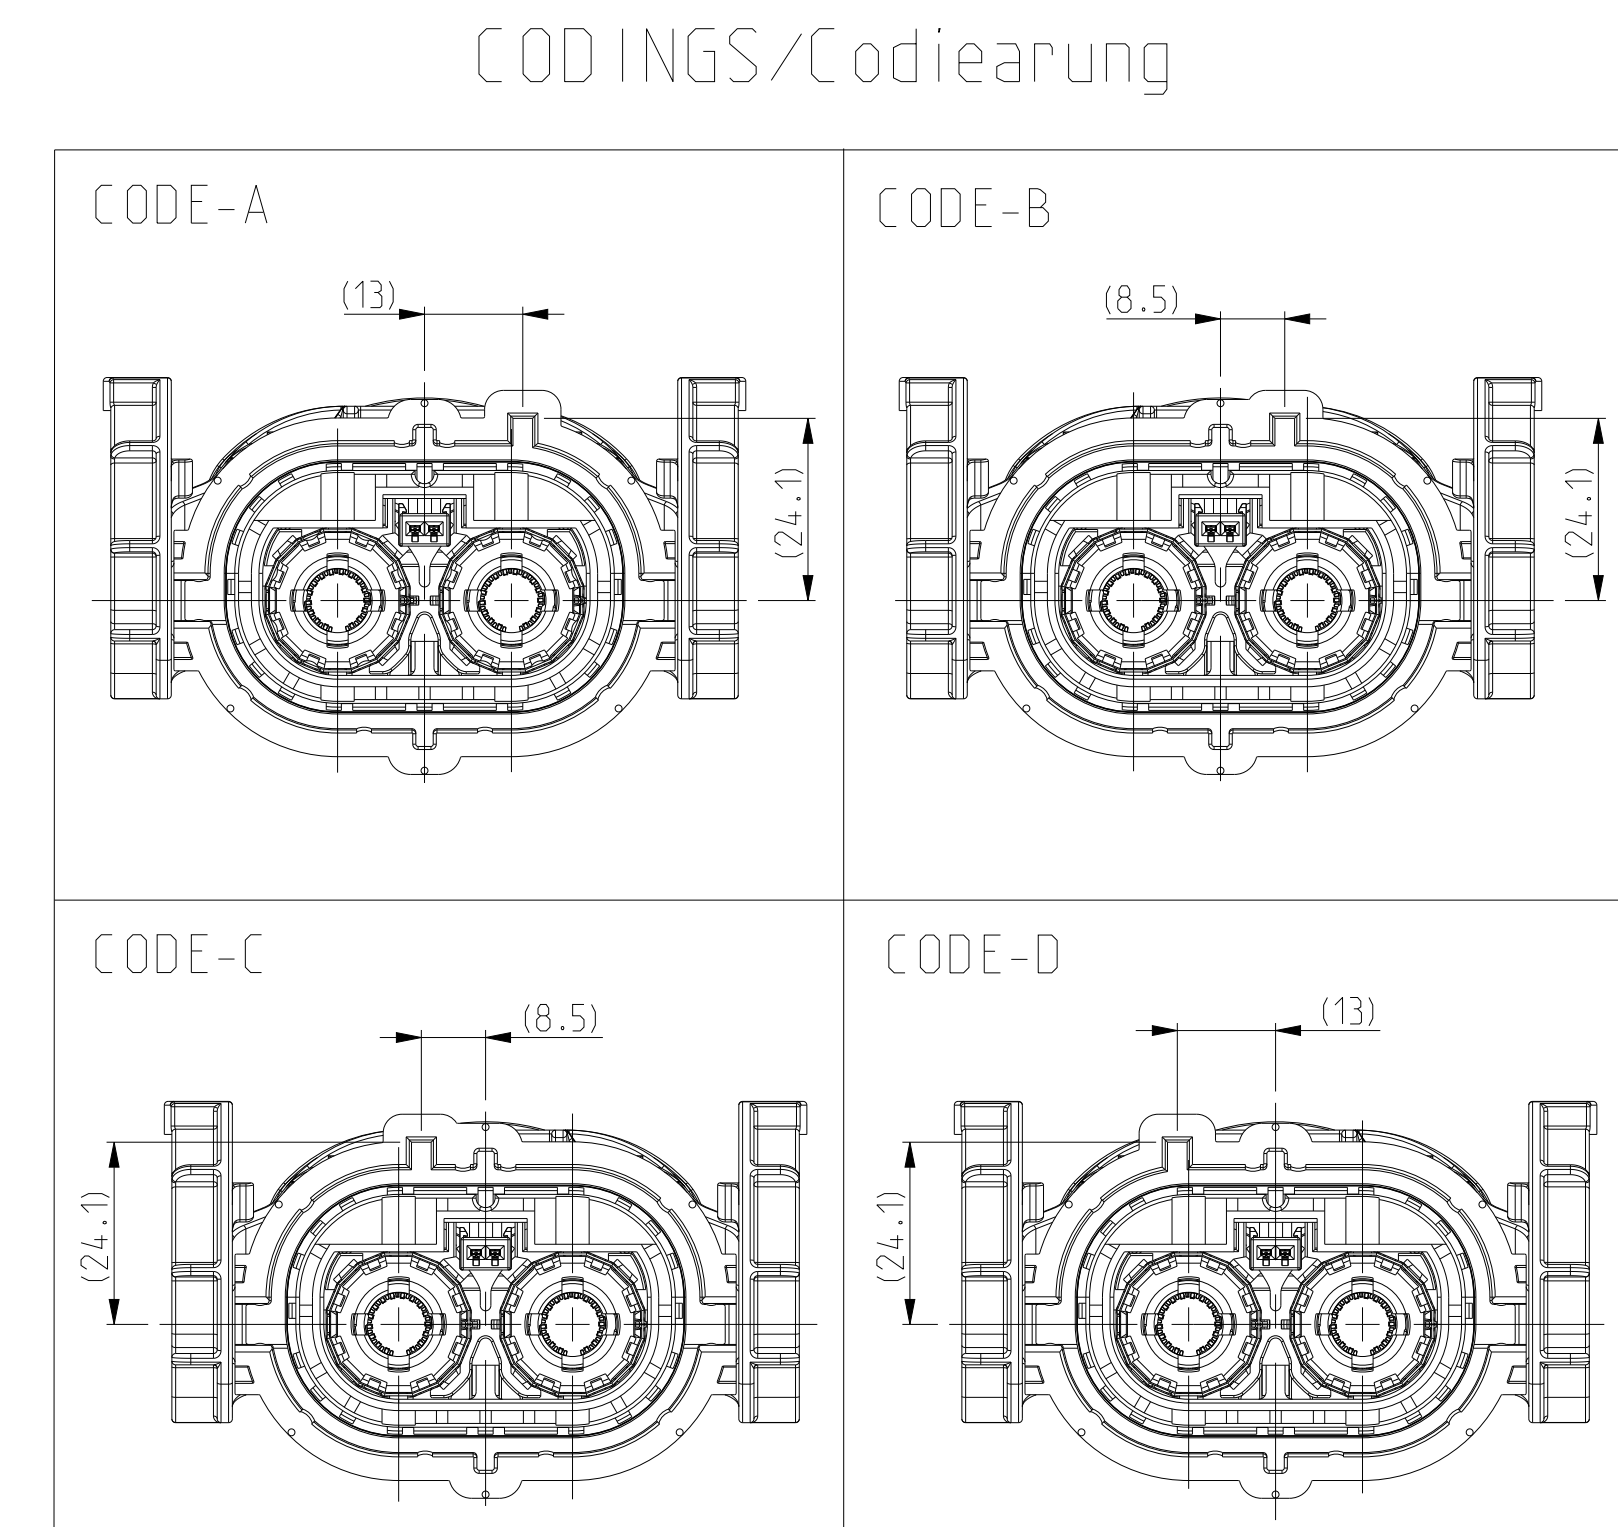

NOTE Bem.	FEATURE Merkmal
△ PRODUCT-SPEC. Produkt-Spez.	108-94297
△ APPLICATION SPEC. Verarbeitungsspez.	114-94130


TOLERANCING ISO 8015  
 TOLERIERUNG ISO 8015  
 THIS DRAWING IS A CONTROLLED DOCUMENT.  
 DIMENSIONING AND TOLERANCING PER ISO STANDARDS.  
 THIS DRAWING IS A CONTROLLED DOCUMENT.  
 DIMENSIONING AND TOLERANCING PER ISO STANDARDS.  
 DATE: 19DEC2014  
 DRAWN: J.D.Vu.  
 CHECKED: J.D.Vu.  
 APPROVED: J.D.Vu.  
 PRODUCT SPEC: 108-94297  
 APPLICATION SPEC: 114-94130  
 MATERIAL: SEE TABLE  
 SEE TABLE  
 CUSTOMER DRAWING  
 SCALE: 1:1  
 SHEET: 11  
 OF: 14  
 REV: A7  
 2POS 8mm HV KIT, 180DEG, SEALED  
 2pol 8mm HV Kit, 180Grad, gedichtet  
 OVERVIEW / Übersicht, ASSY  
 A0 00779 ©=2177052

LEVER OPERATION SIDE  
Hebel Betaetigungsseite

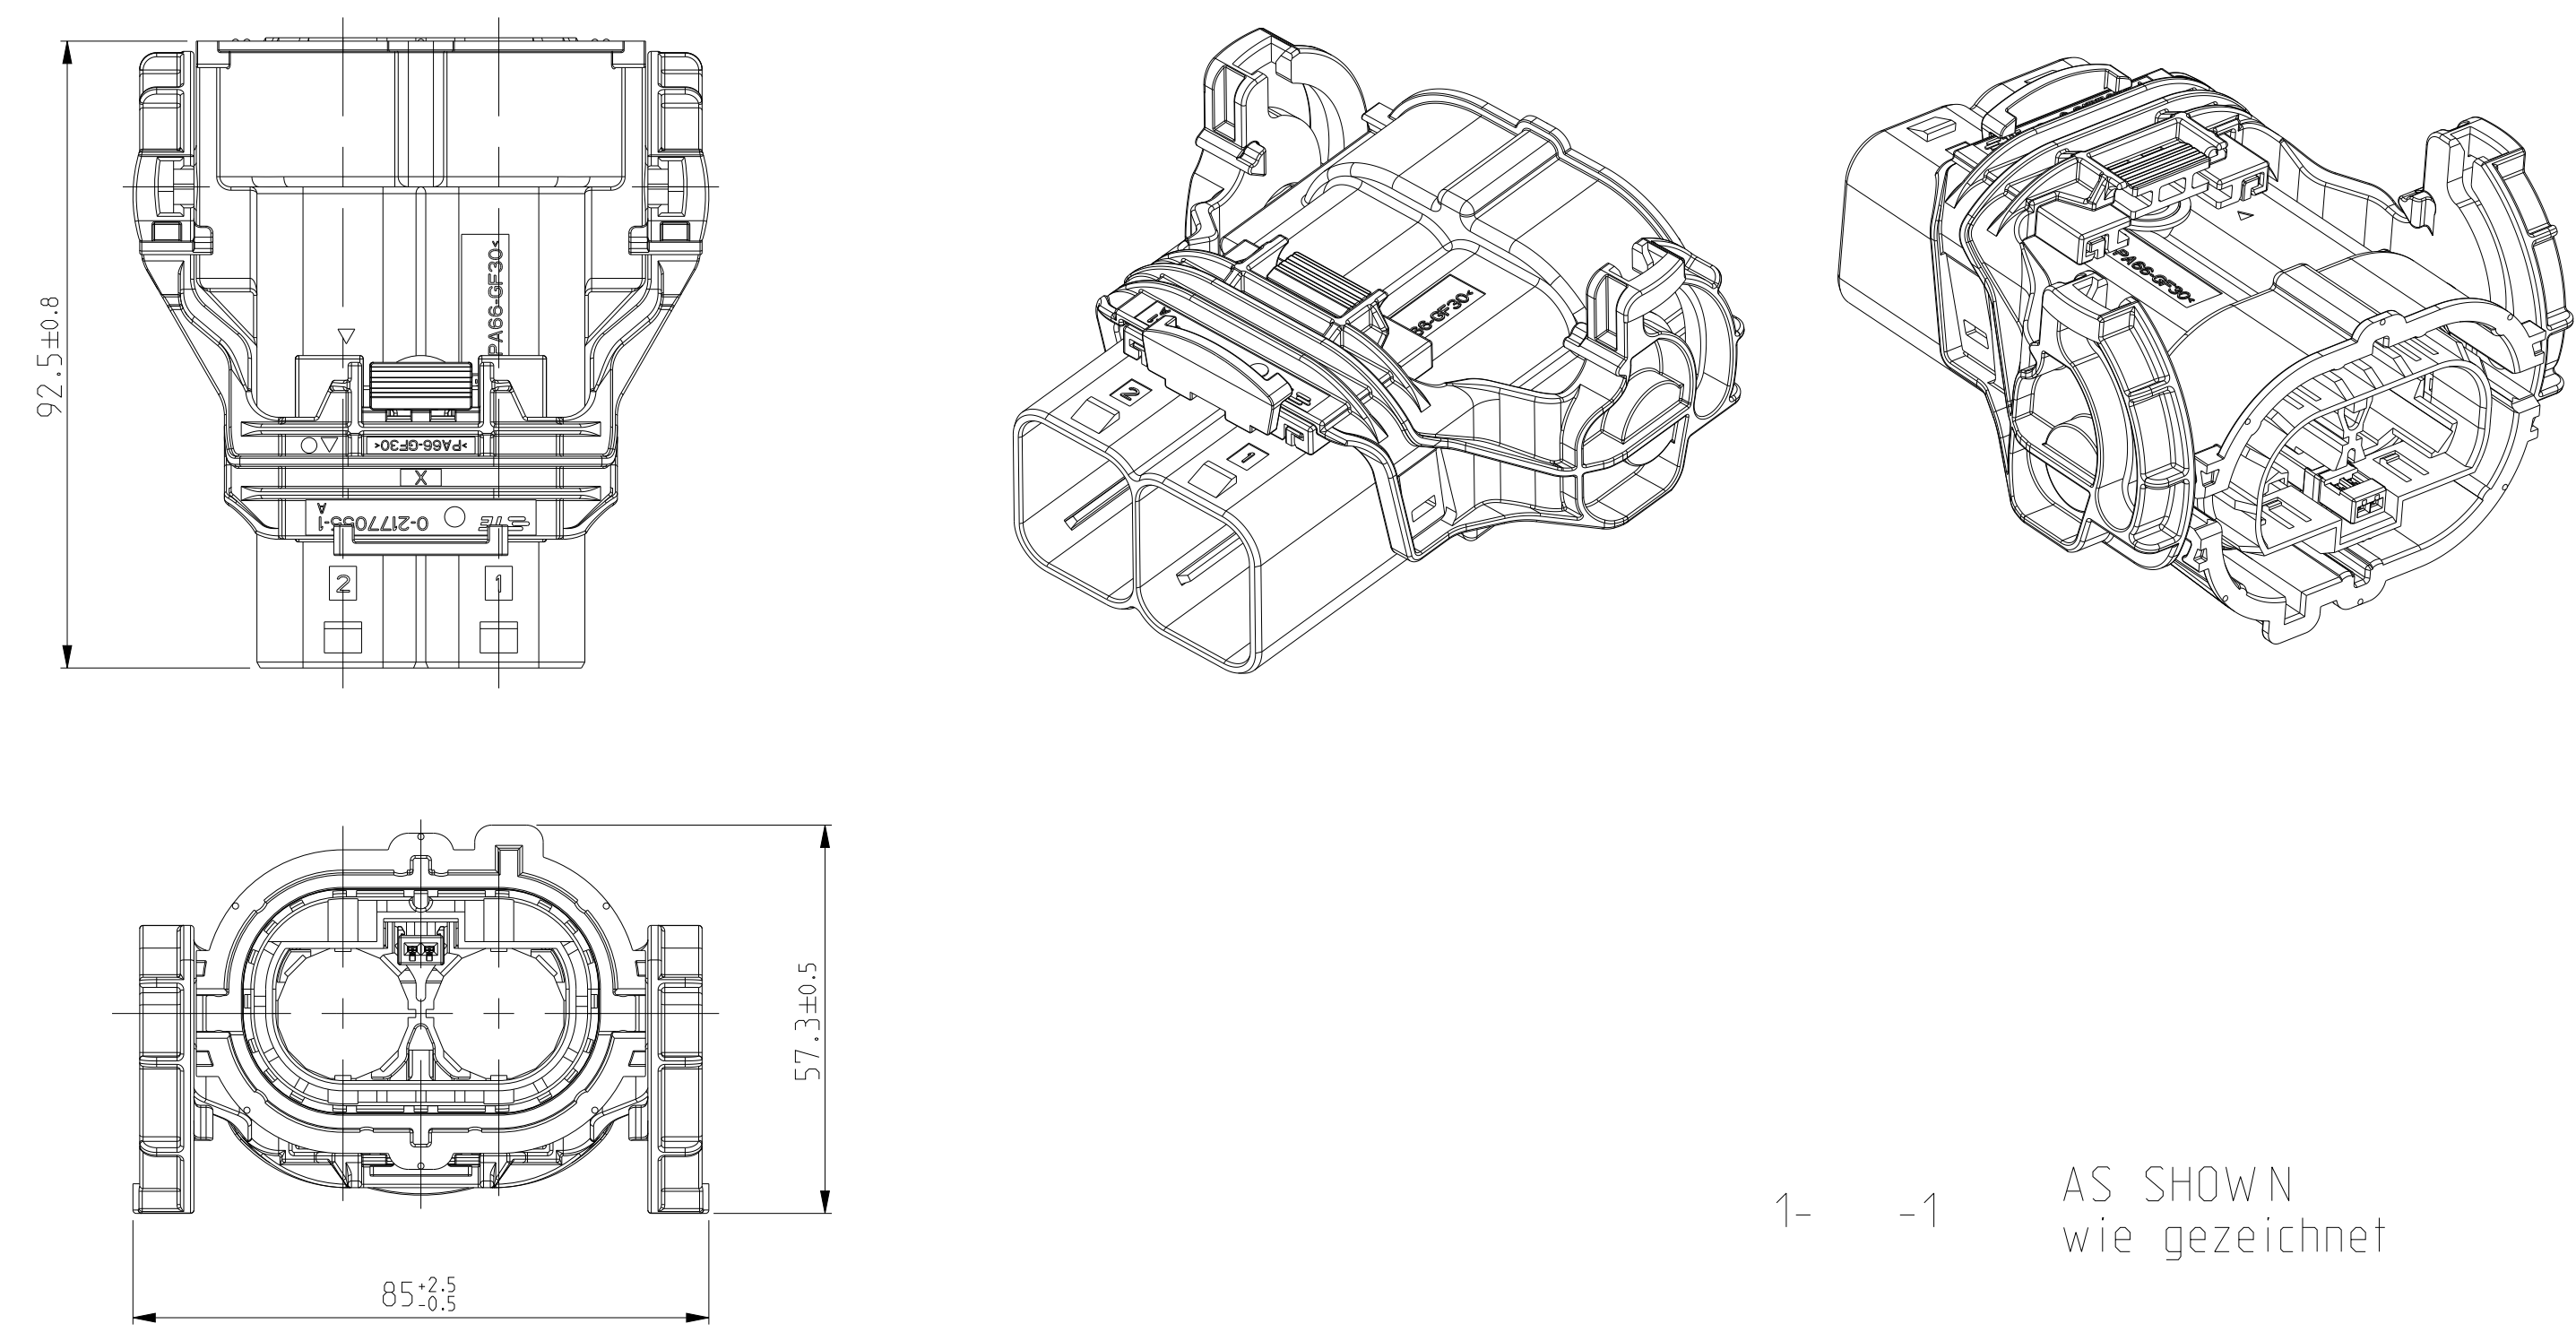


1- -1 AS SHOWN  
wie gezeichnet

LEVER OPERATION SIDE  
Hebel Betaetigungsseite

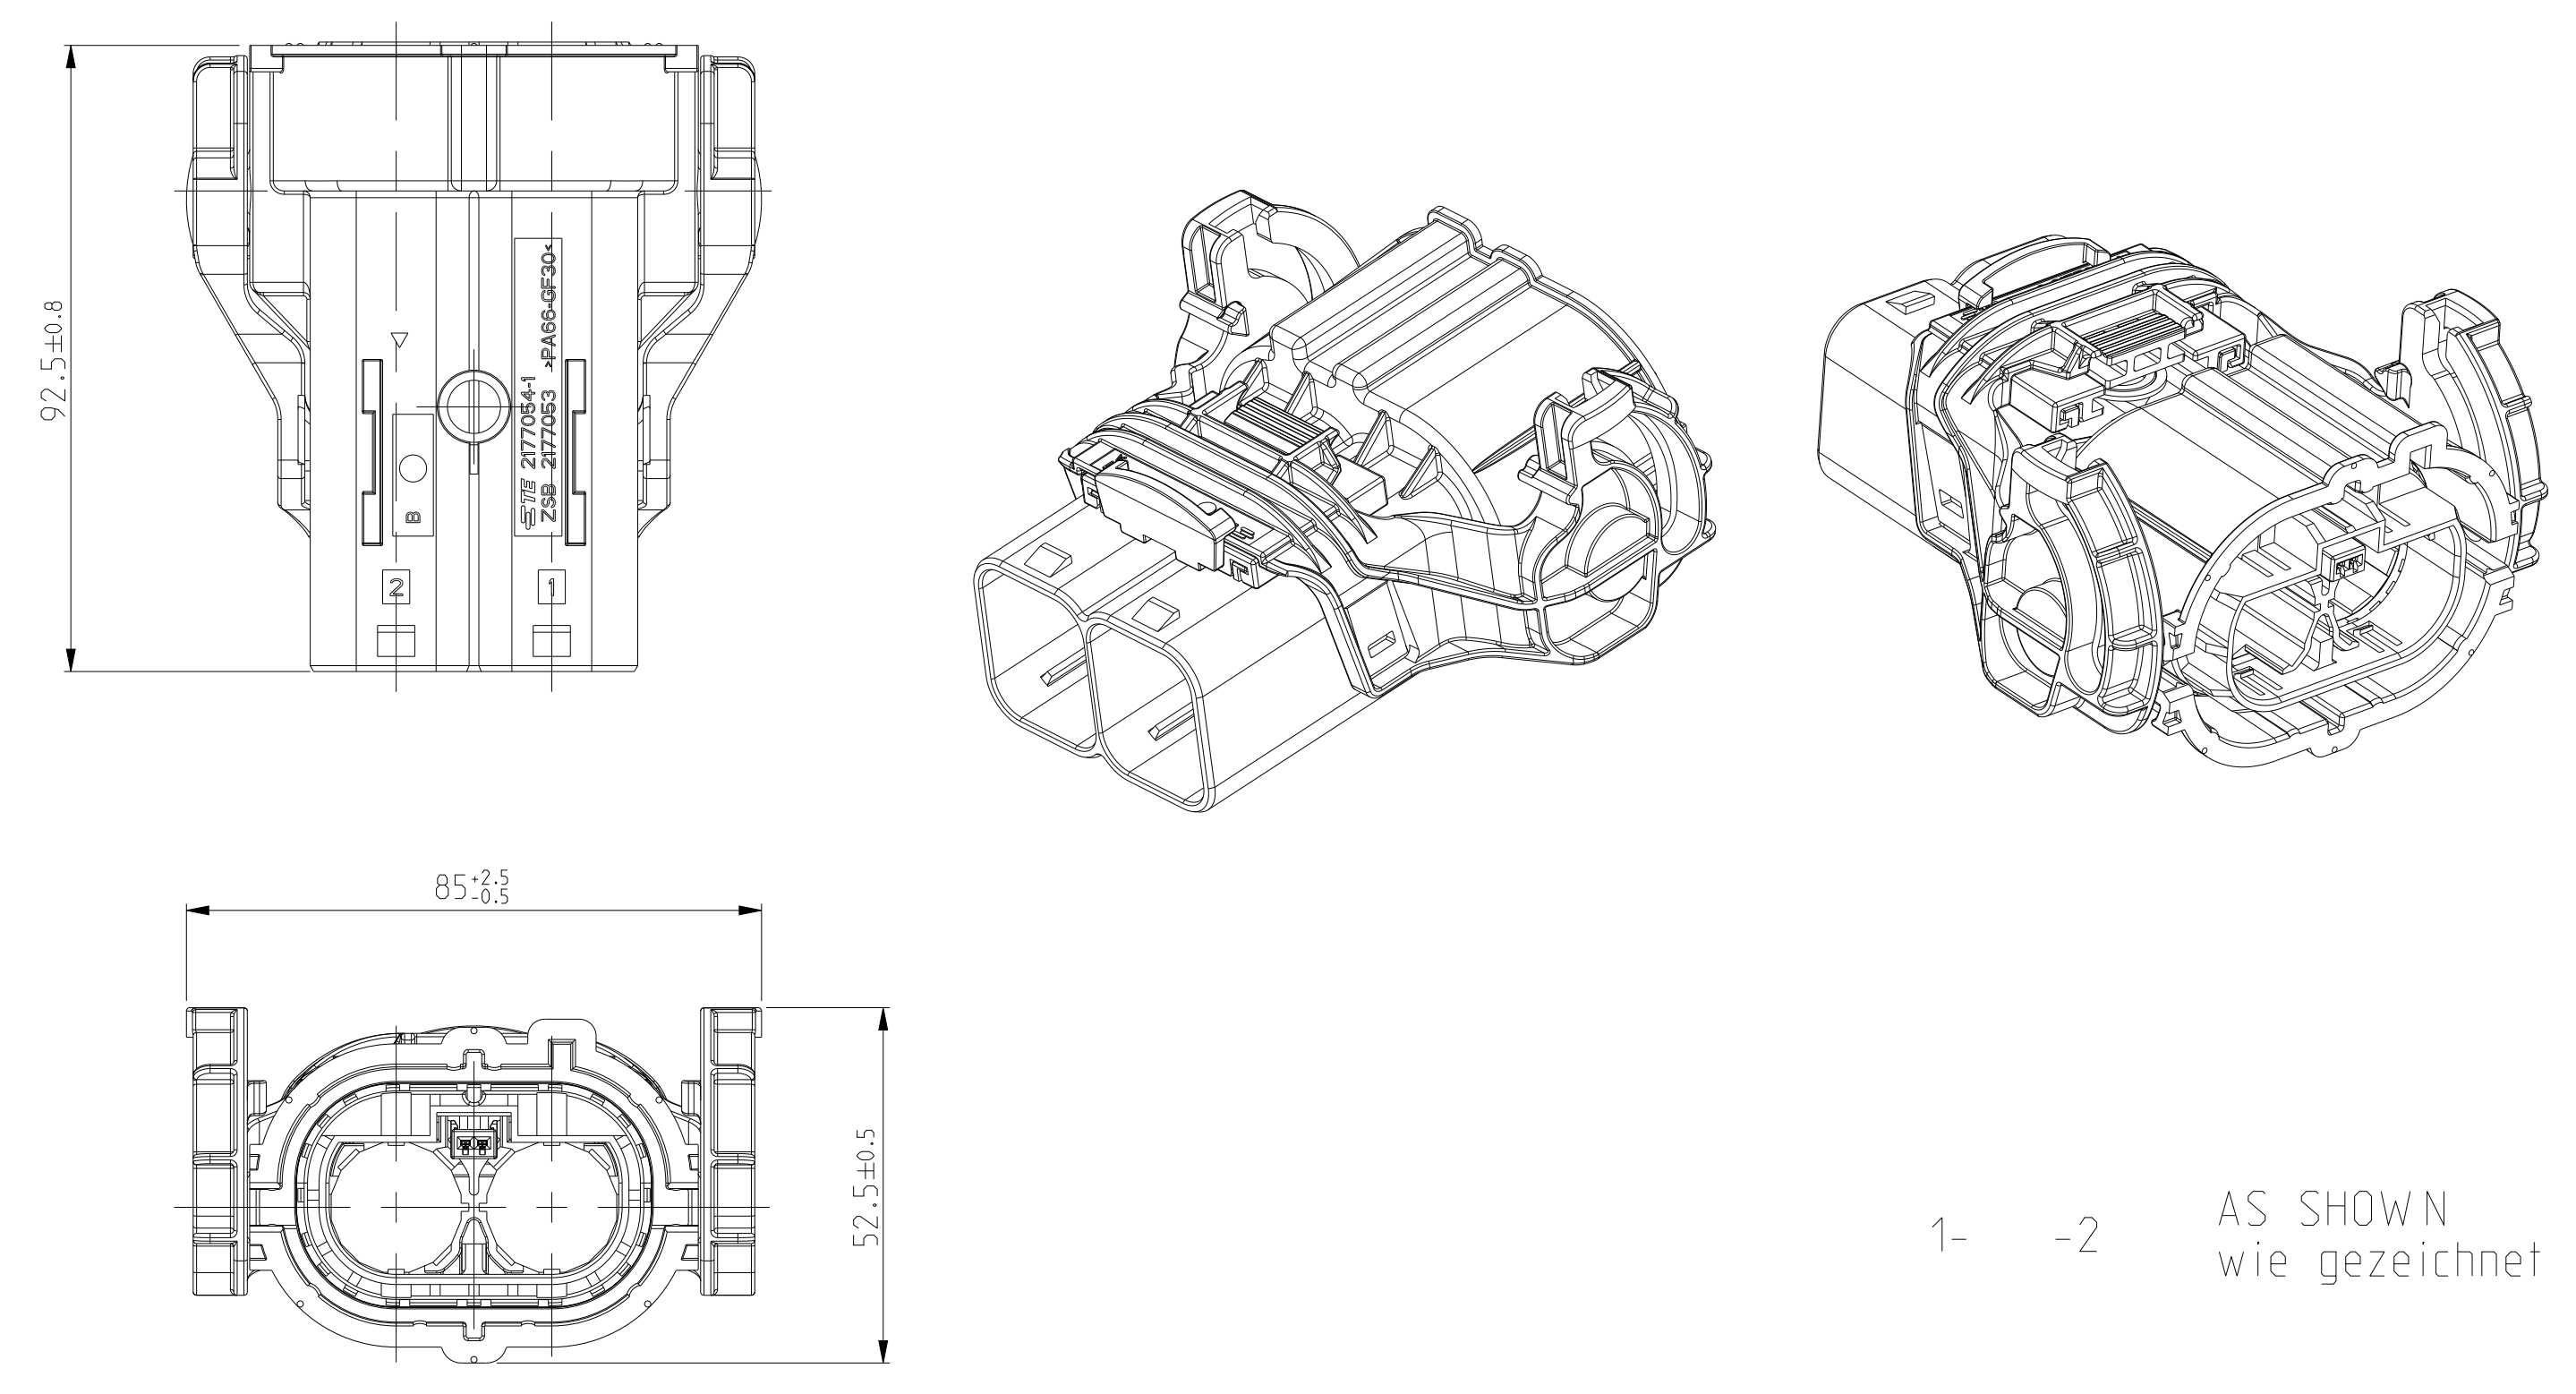


1- -2 AS SHOWN  
wie gezeichnet

CODINGS/Codierung

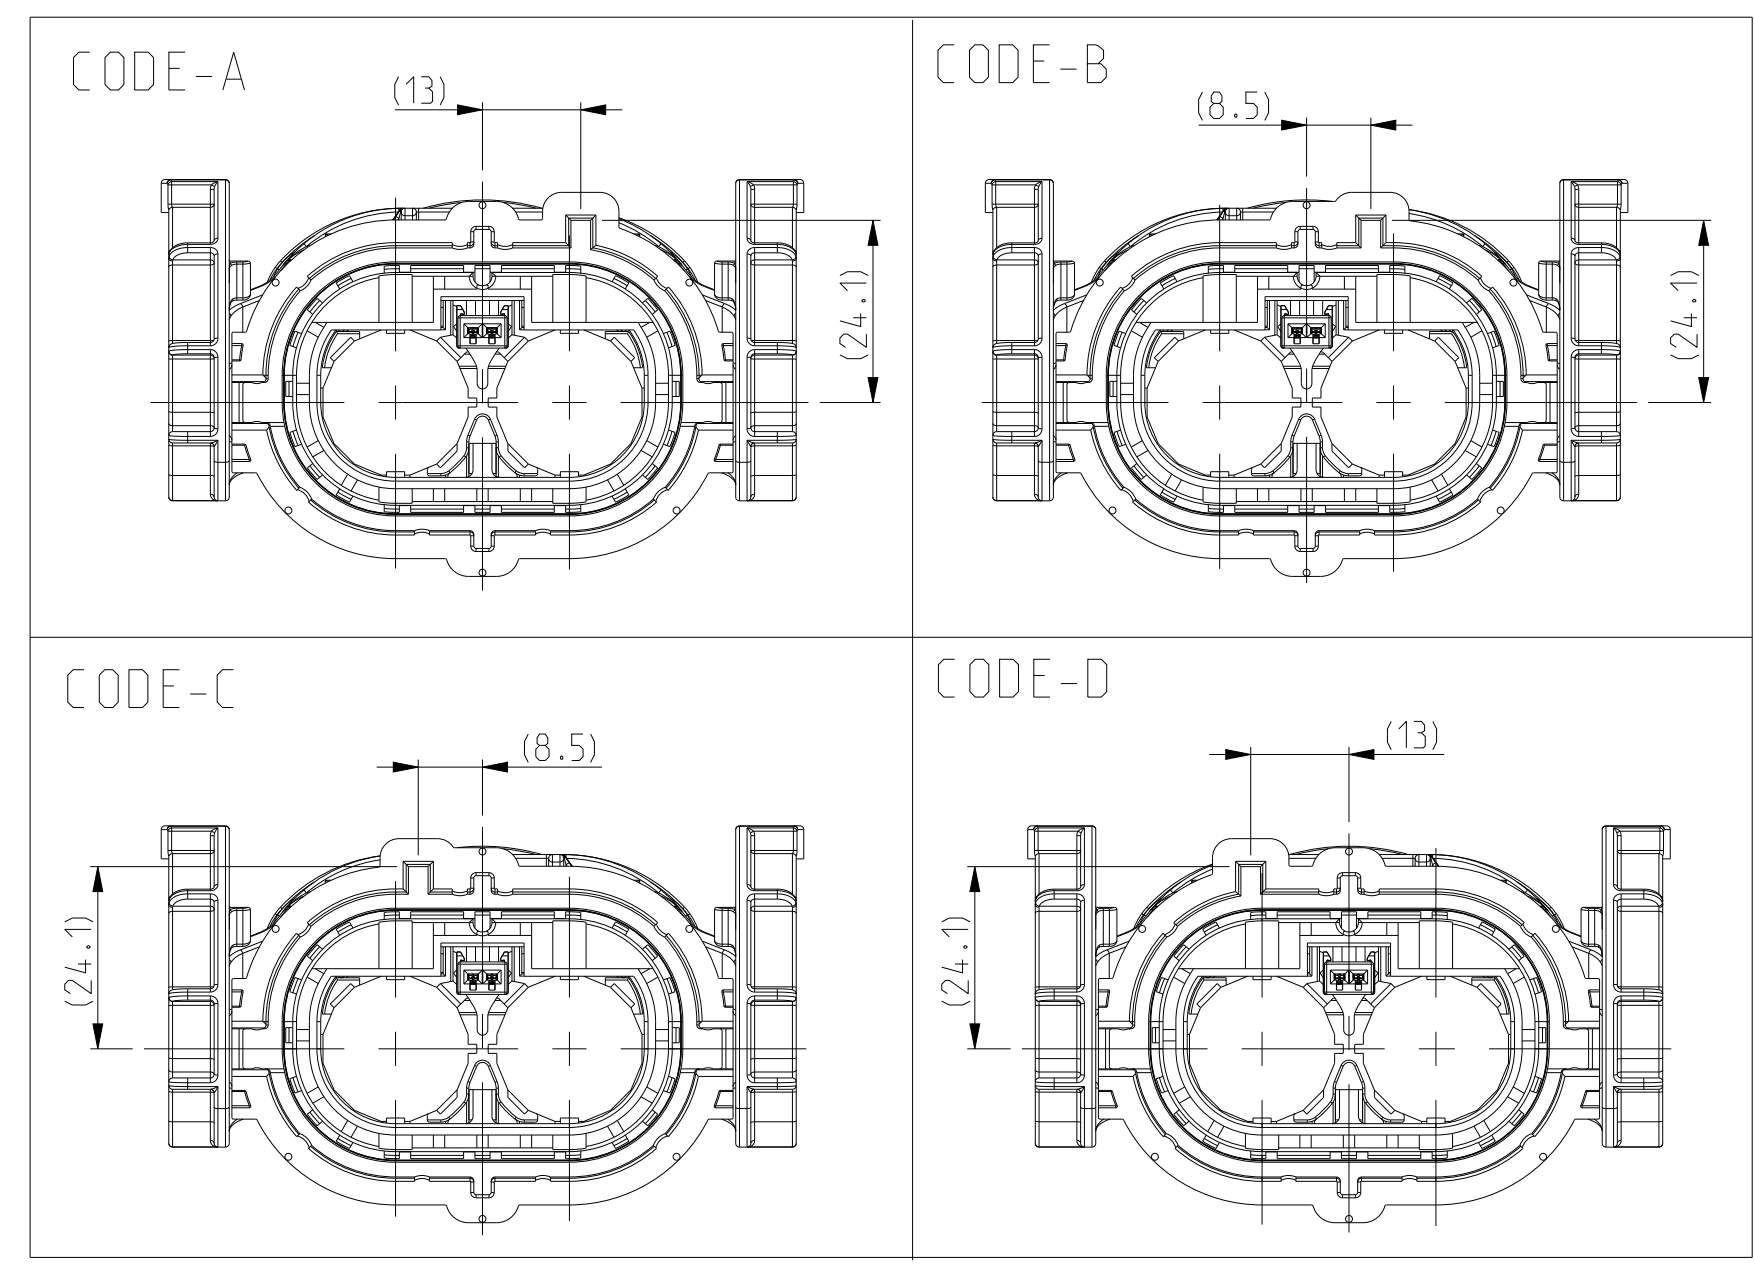


POS	DESCRIPTION
1	2POS, 8mm HV, REC HSG, 180°, ASSY, SEALED 2pol, gedichtete Assy, 8mm HV, 180°

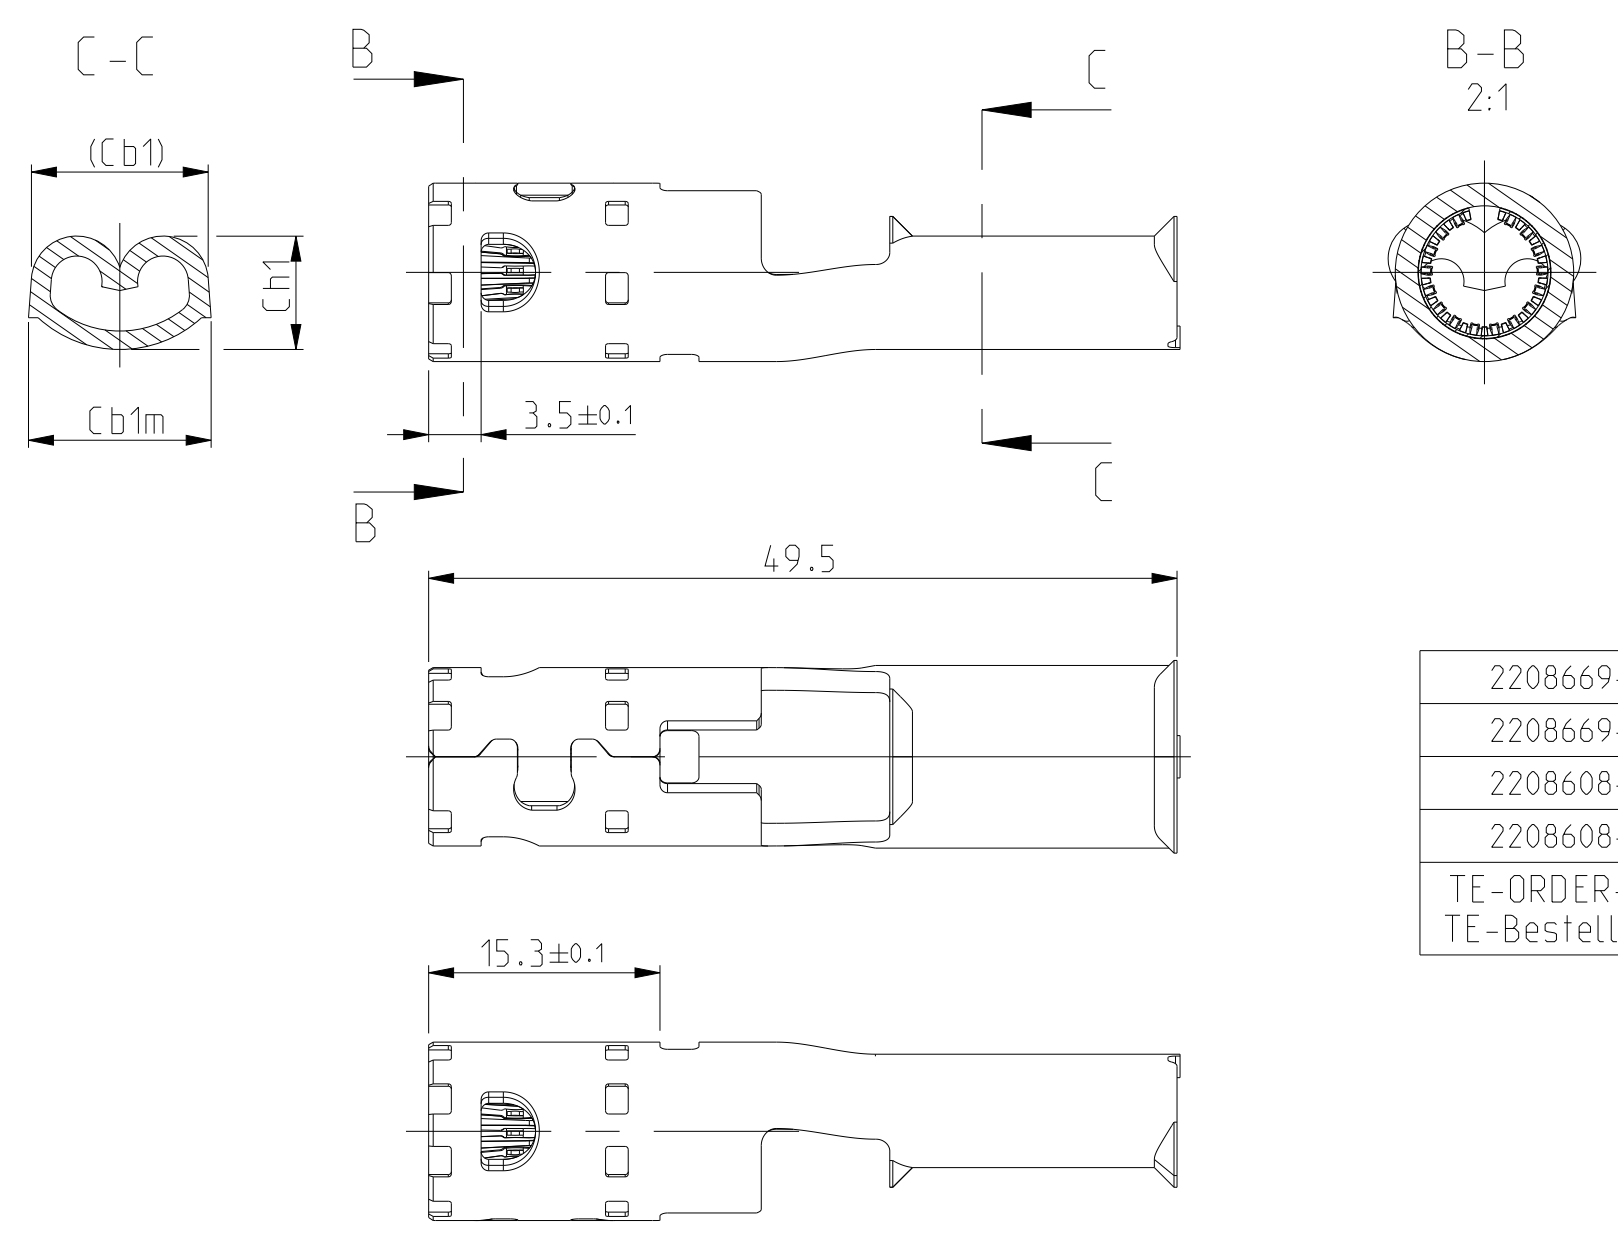


TE-ORDER-NO.	Wire Size (mm)	Cb1 (mm)	Cb1m (mm)	Ch1 (mm)
2208669-3	16	9.65	9.65-0.97	5.85±0.10
2208669-3	25			6.50±0.10
2208608-3	35	11.70	11.70-1.17	7.50±0.15
2208608-3	50			8.45±0.15

POS	DESCRIPTION
2	HV 8mm Sockel Terminal 180° HV 8mm Buchsenkontakt 180°

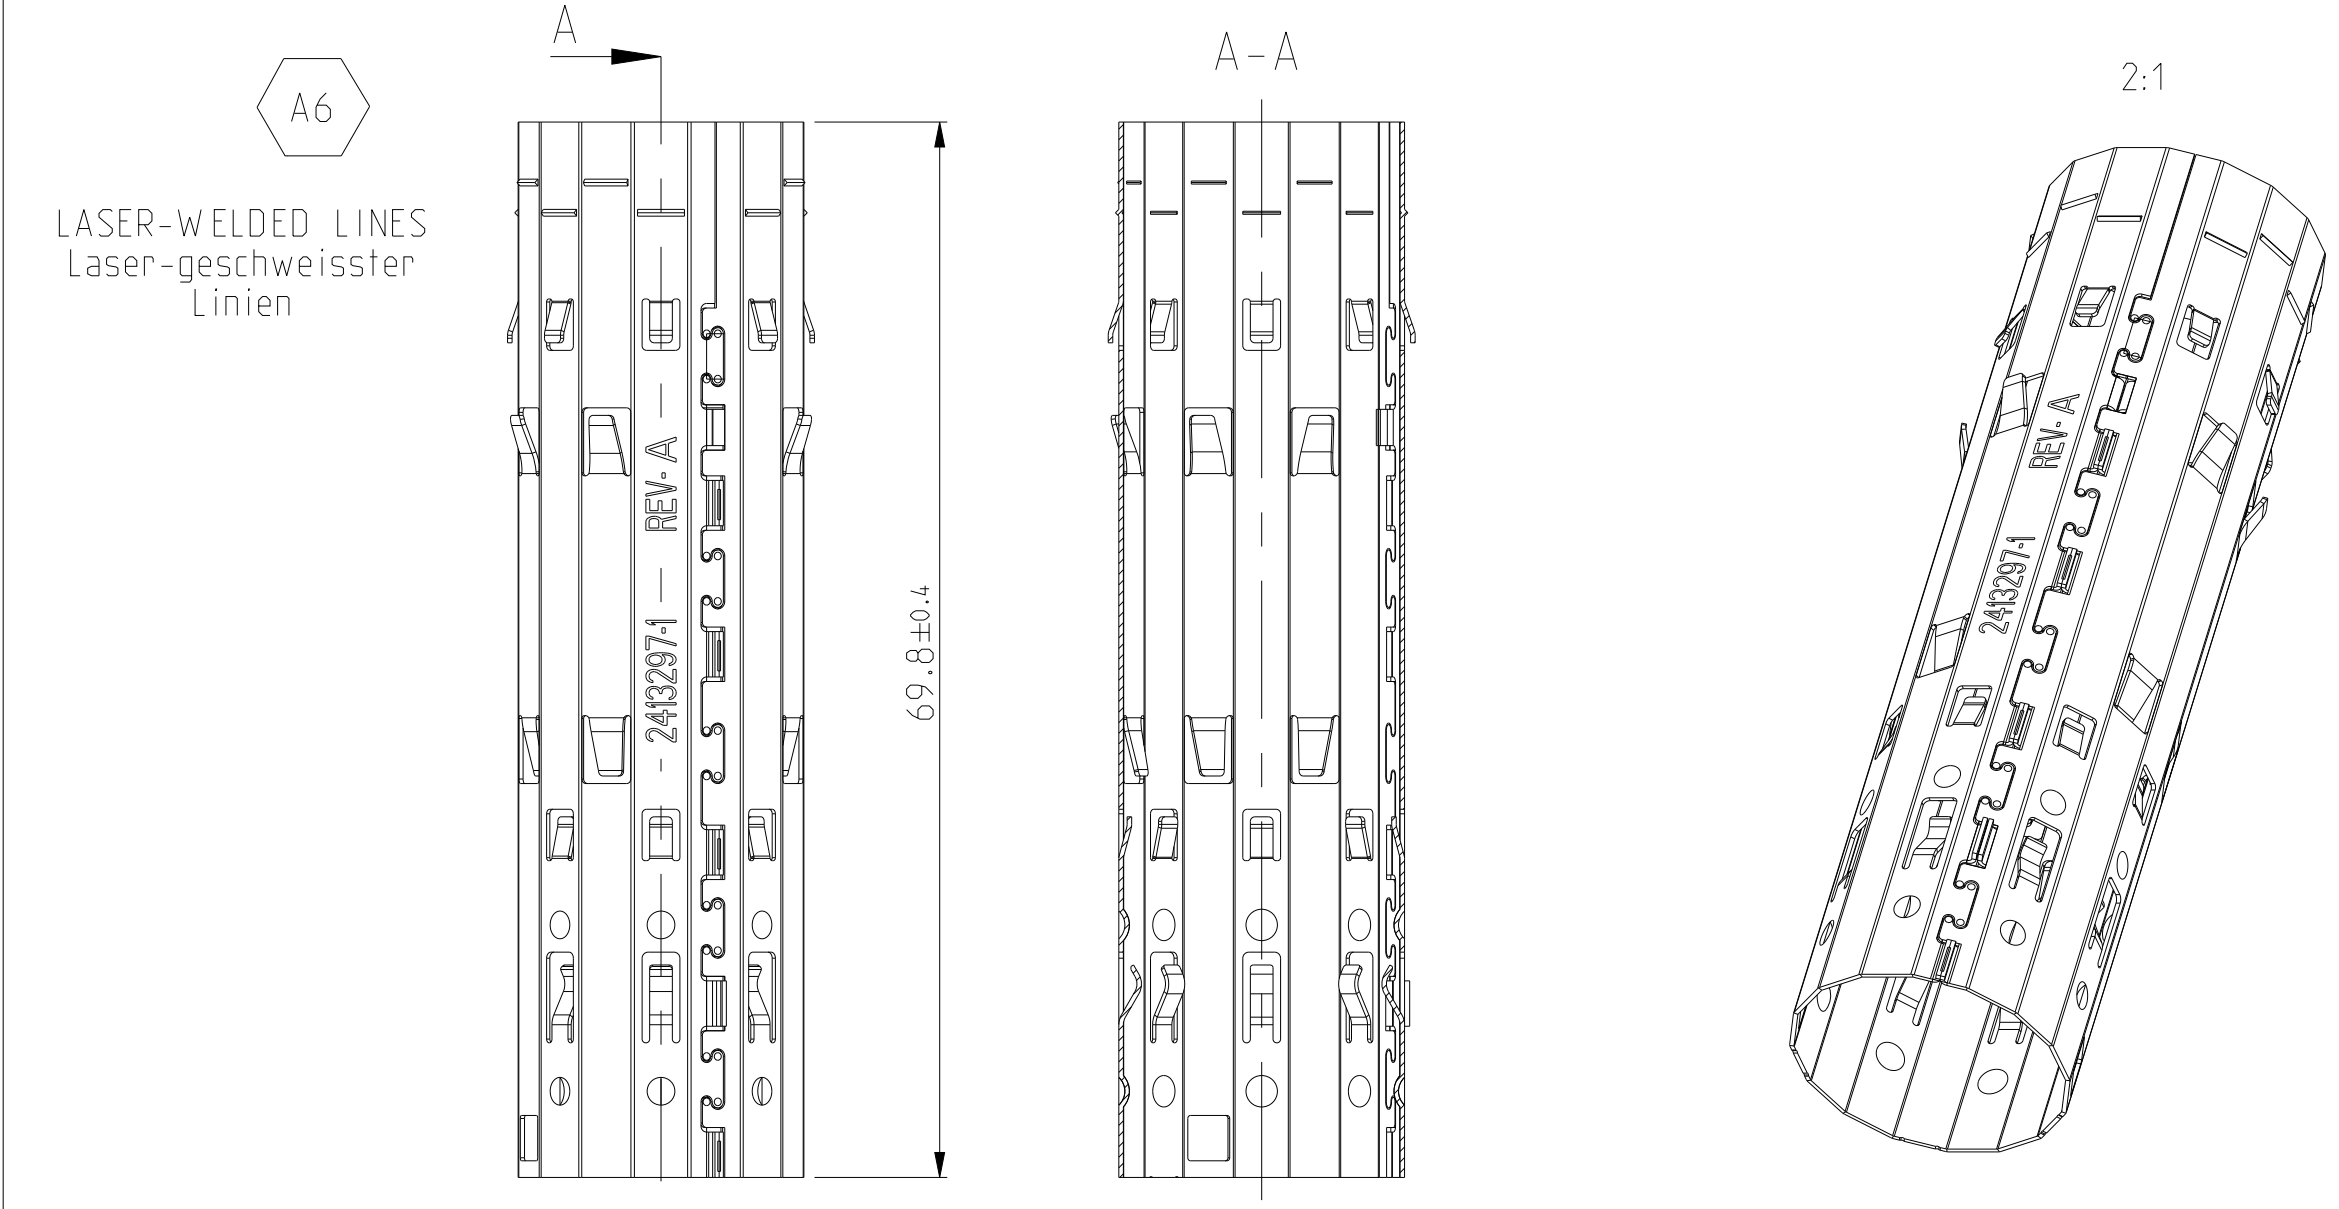


A6  
LASER-WELDED LINES  
Laser-geschweisster  
Linien

POS	DESCRIPTION
3	SHIELDING SLEEVE, 180° Schirmhülse, 180°

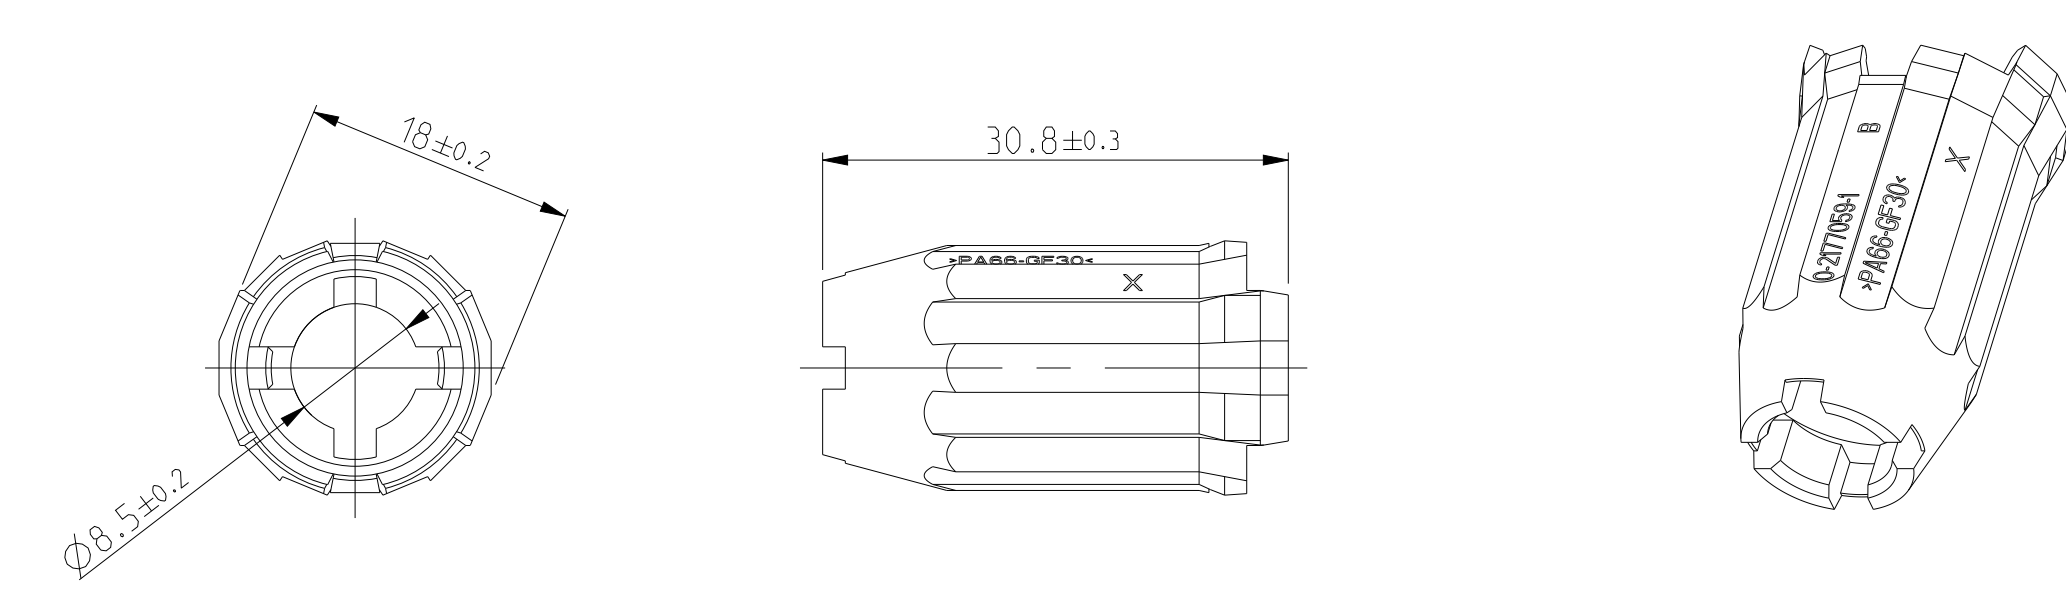


POS	DESCRIPTION
4	FINGER PROT CAP 8mm HV, 180° Fingerschutzkappe 8mm HV, 180°

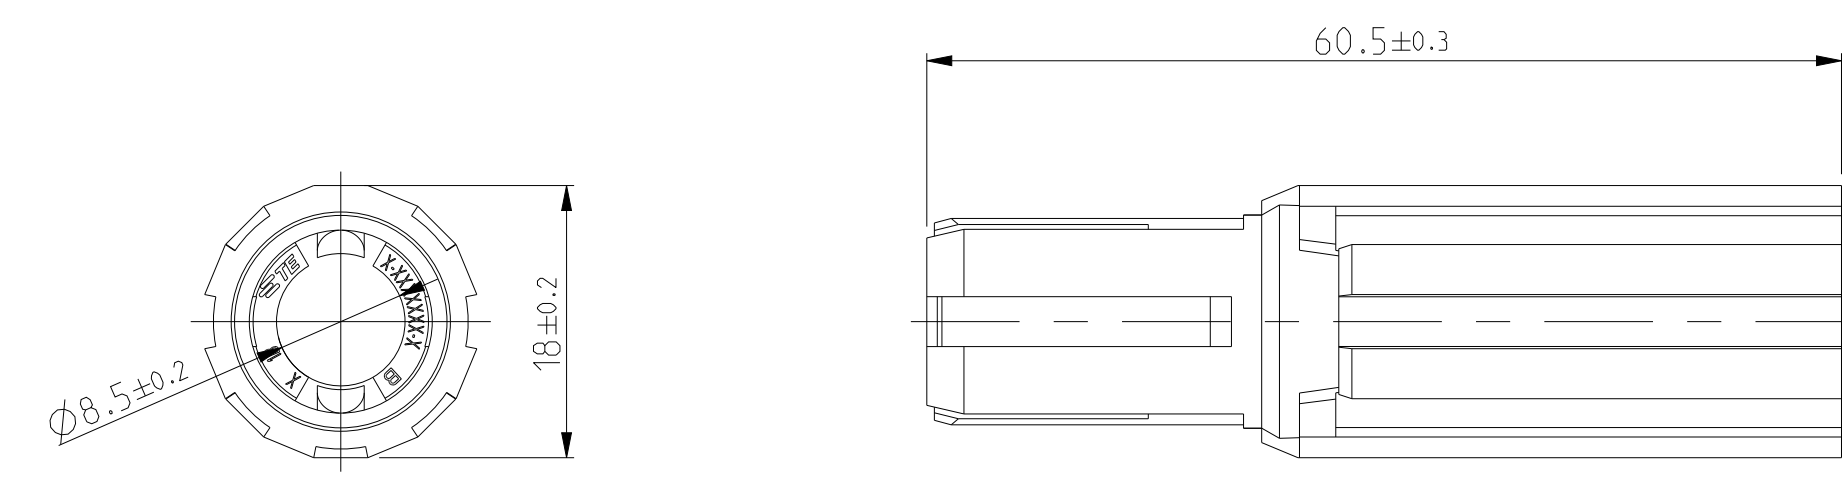

POS	DESCRIPTION
5	INSULATION INSERT 180° Isolationskoerper 180°


TE PN 2177061-1

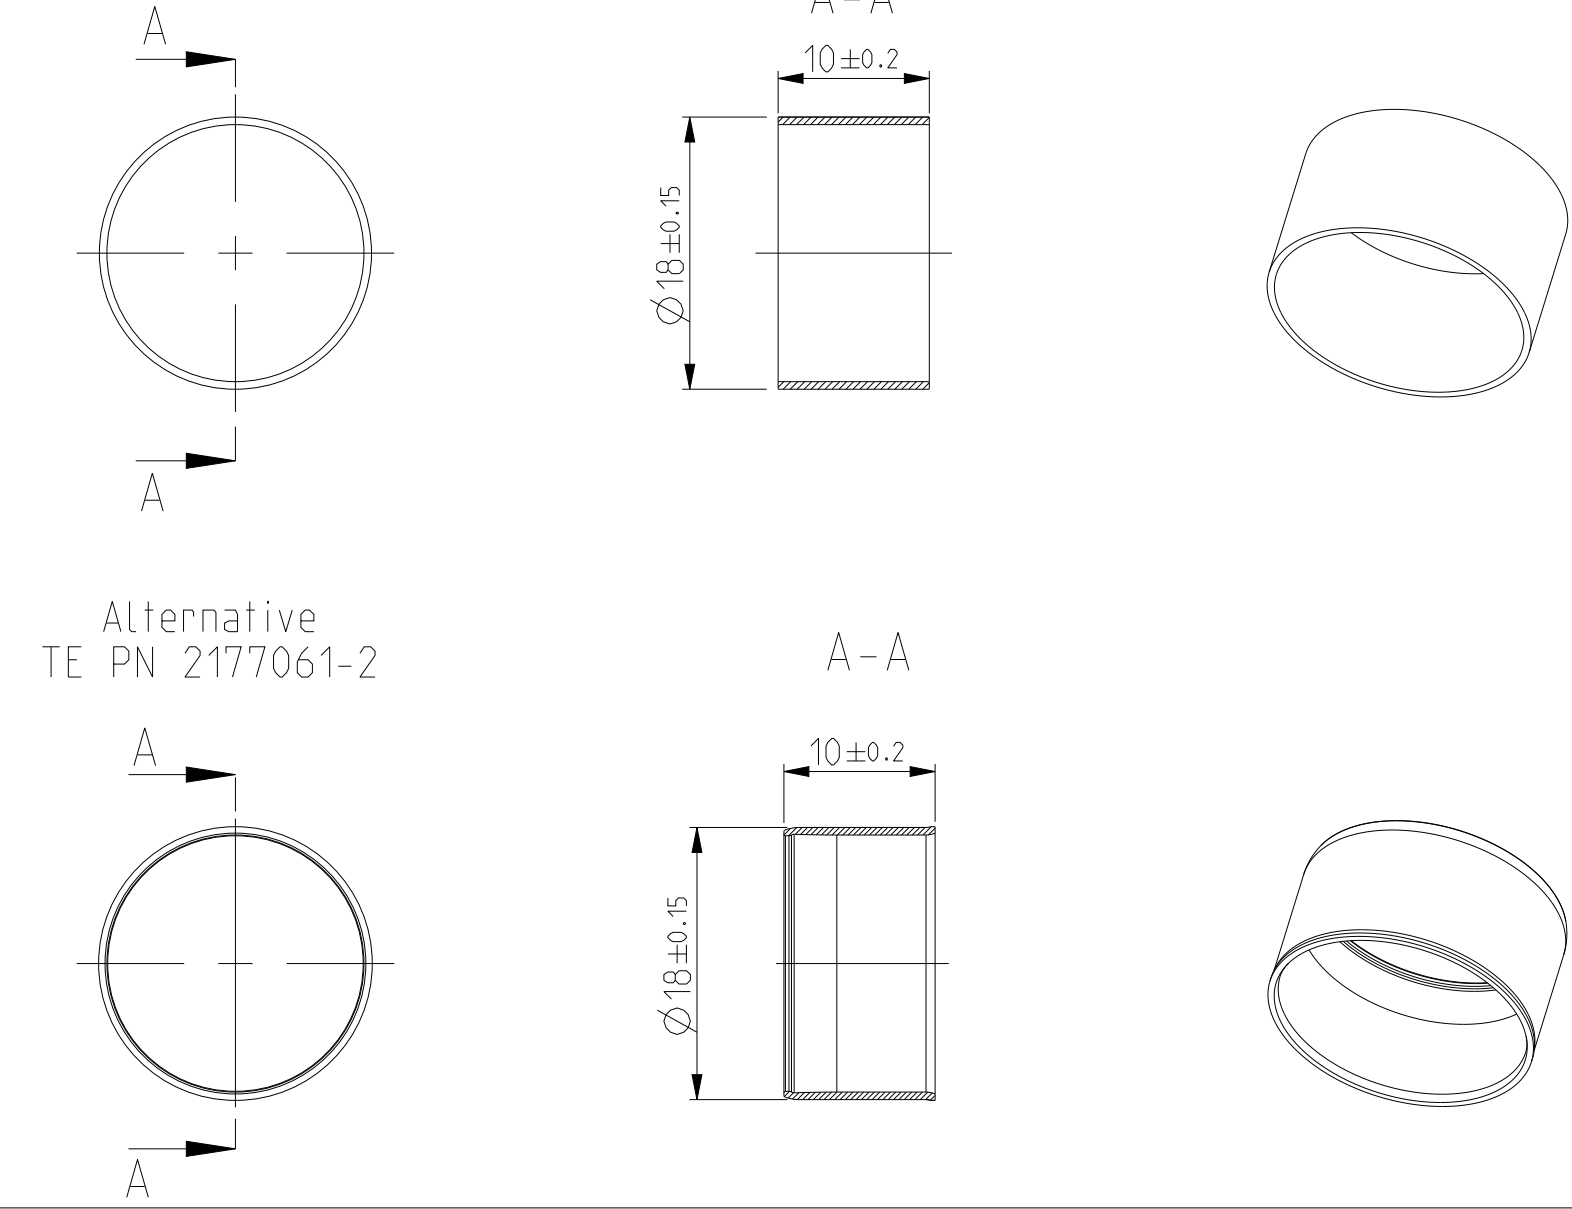

Alternative  
TE PN 2177061-2


REVISIONS			
REV	DATE	BY	APPD
-	SEE SHEET 1	-	-

POS	DESCRIPTION
6	SHIELD CRIMP FERRULE, INNER Untercrimphülse

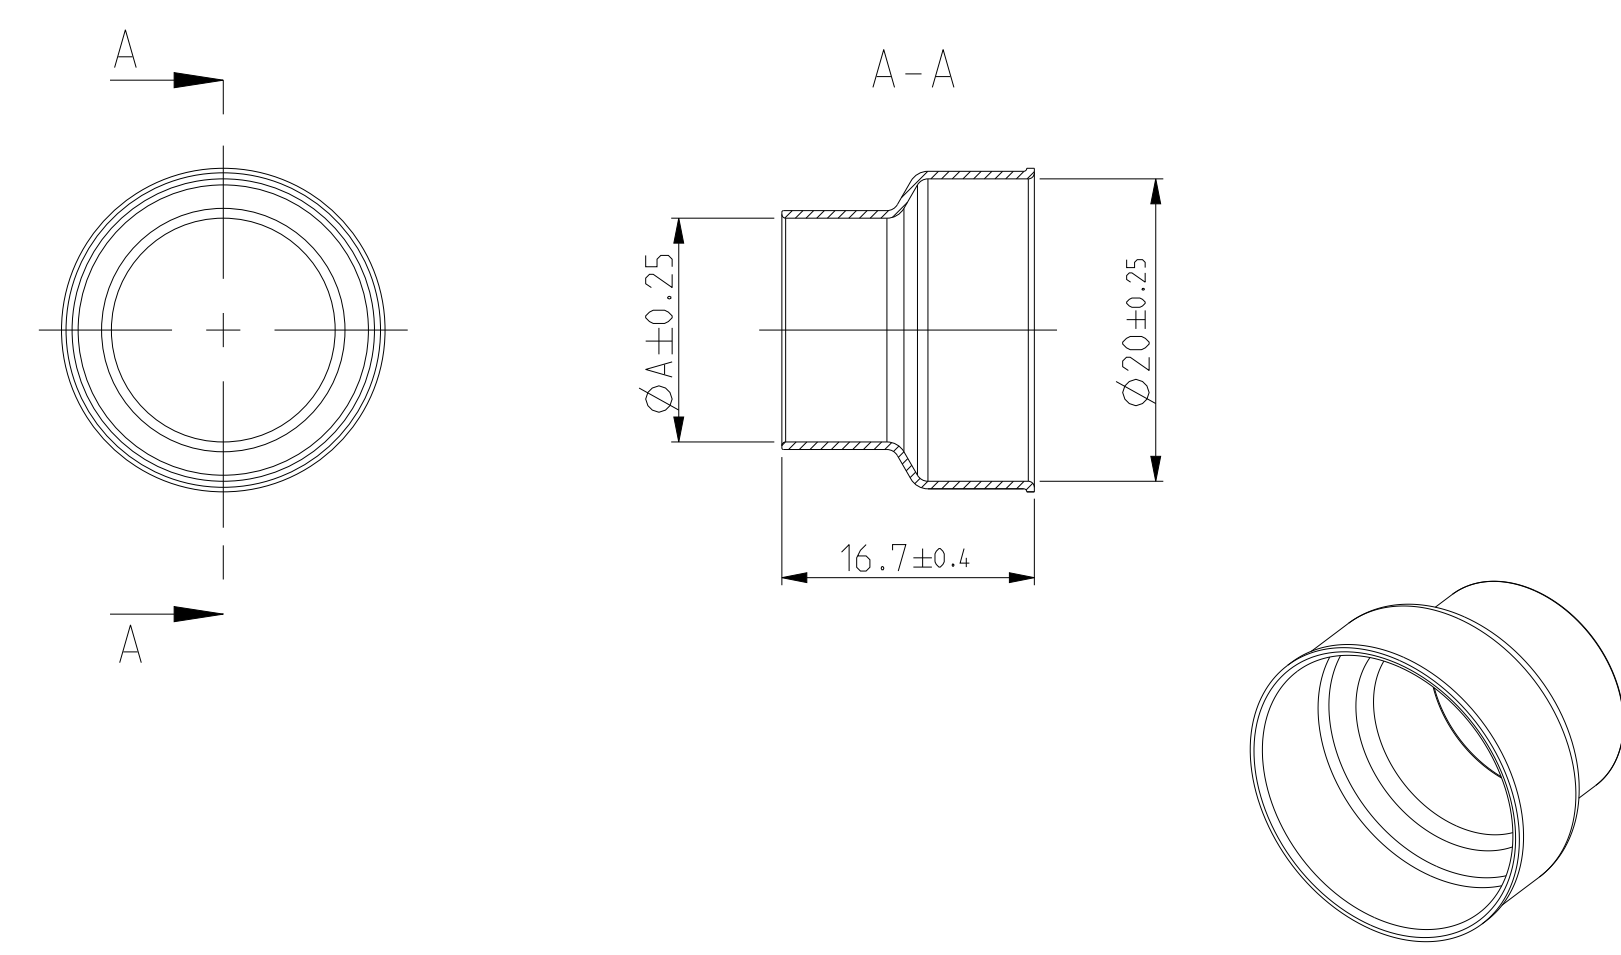


TE-ORDER-NO.	DESCRIPTION	DIMENSION A
2177090-3	12.5	
2177090-2	14.8	
2177090-1	16.2	

POS	DESCRIPTION
7	SHIELD CRIMP SLEEVE Schirm, Crimpbüchse

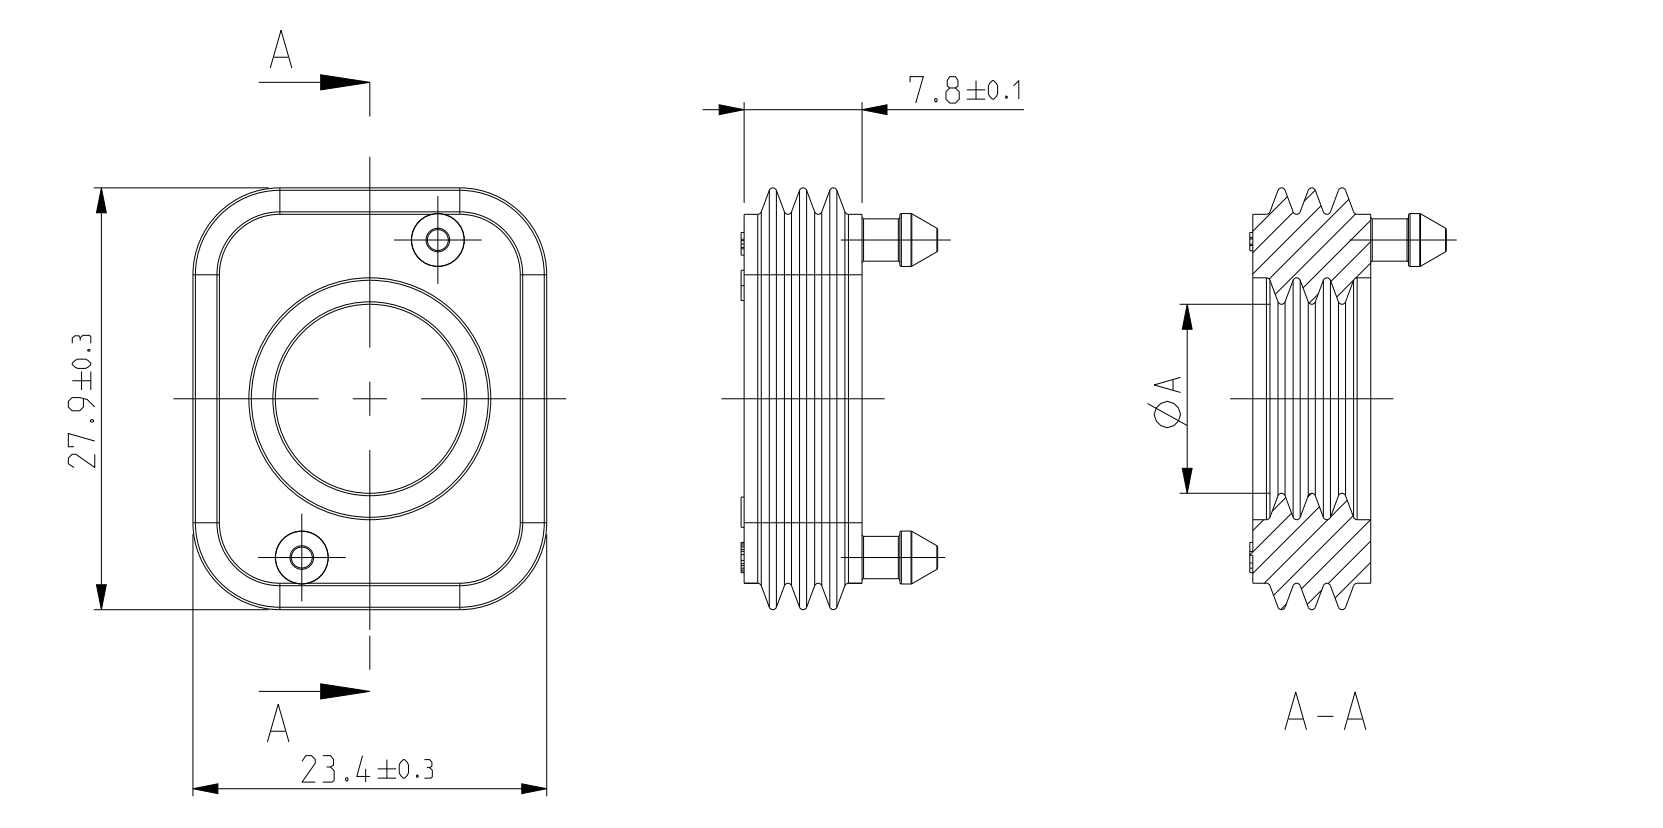


TE-ORDER-NO.	DESCRIPTION	DIMENSION A
2141156-4	8.6	
2141156-3	10.6	
2141156-2	12.8	
2141156-1	13.6	

POS	DESCRIPTION
8	SINGLE WIRE SEAL, 8mm HV, 90° Kabeldichtung einzeln, 8mm HV, 90°

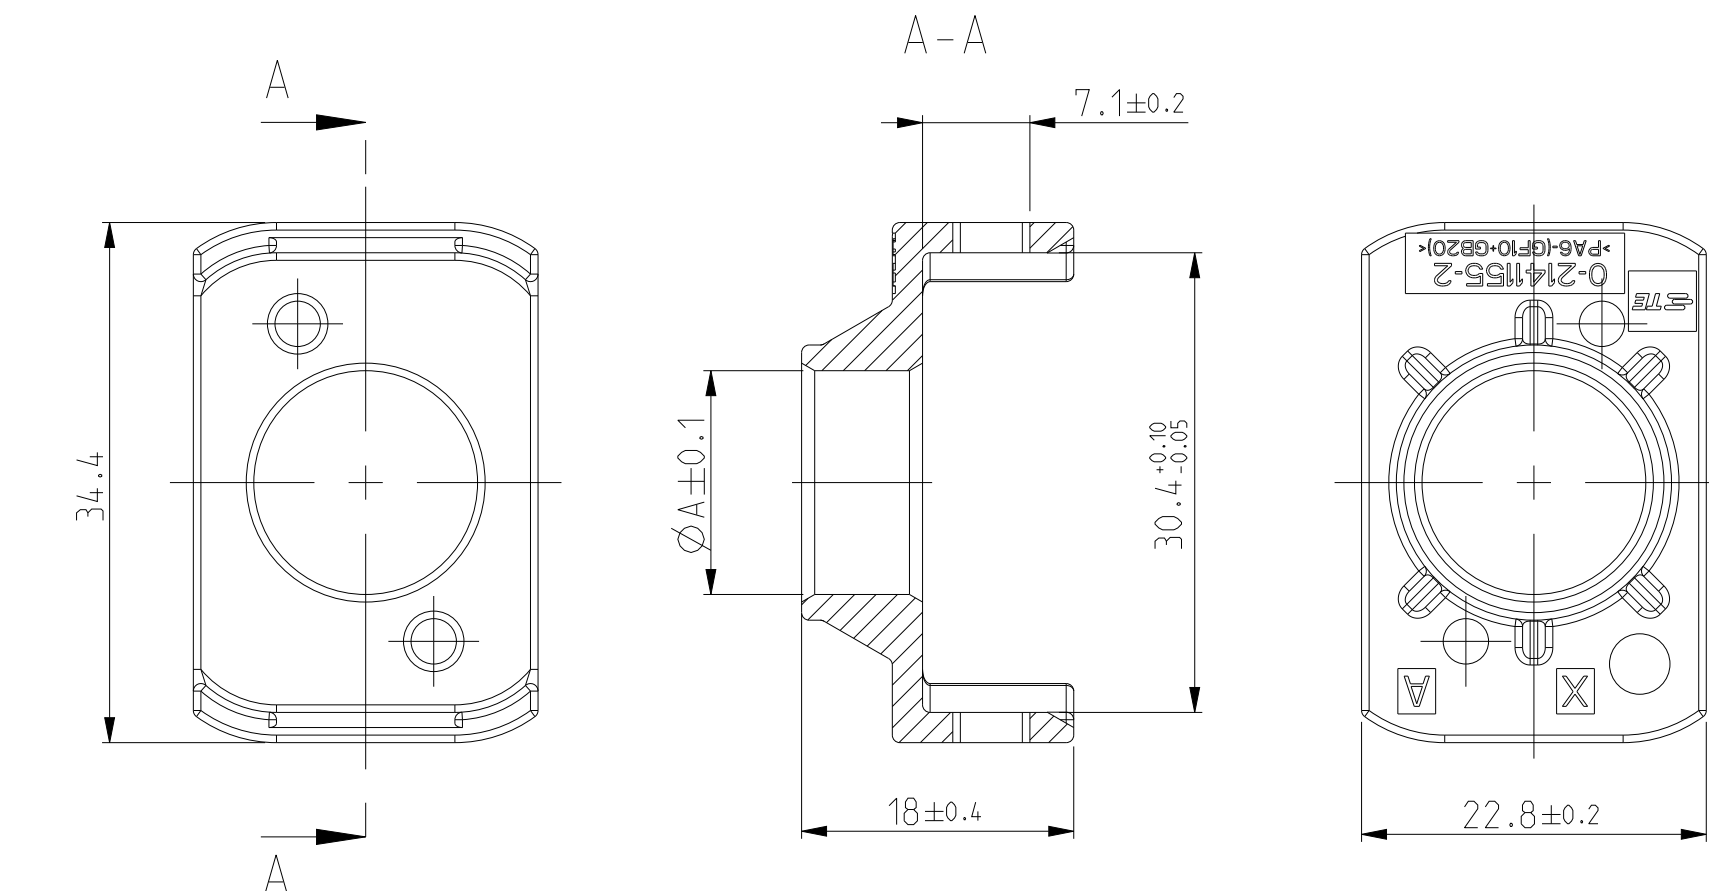

TE-ORDER-NO.	DESCRIPTION	DIMENSION A
2141155-4	10.6	
2141155-3	12.6	
2141155-2	14.8	
2141155-1	16.2	

POS	DESCRIPTION
9	PROTEC. COVER 8mm HV, 90° Abdeckkappe 8mm HV, 90°

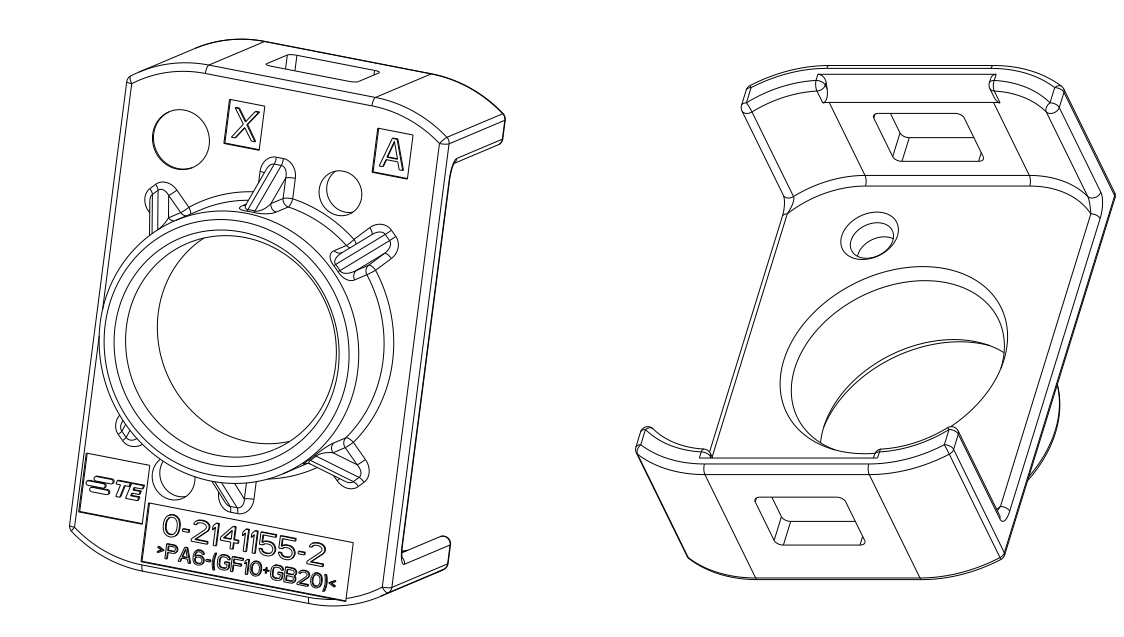

TOLERANZ ISO 8015  
TOLERIERUNG ISO 8015

DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT.  
DIMENSIONEN UND TOLERANZEN GEMÄSS: GPS ISO STANDARDS.

THIS DRAWING IS A CONTROLLED DOCUMENT.  
DIMENSIONING AND TOLERANCING PER GPS ISO STANDARDS.

DATE: 19DEC2014  
REV: 1  
APPD: [Signature]

TE Connectivity




2POS 8mm HV KIT, 180DEG, SEALED  
2pol 8mm HV Kit, 180Grad, gedichtet  
OVERVIEW / Uebersicht, ASSY

SCALE: 1:1  
SHEET: 2 OF 4  
REV: A.7

LEVER OPERATION SIDE ○  
Hebel Betaetigungsseite

LEVER OPERATION SIDE △  
Hebel Betaetigungsseite

REVISIONS			
NO.	DATE	DESCRIPTION	BY
1		SEE SHEET 1	

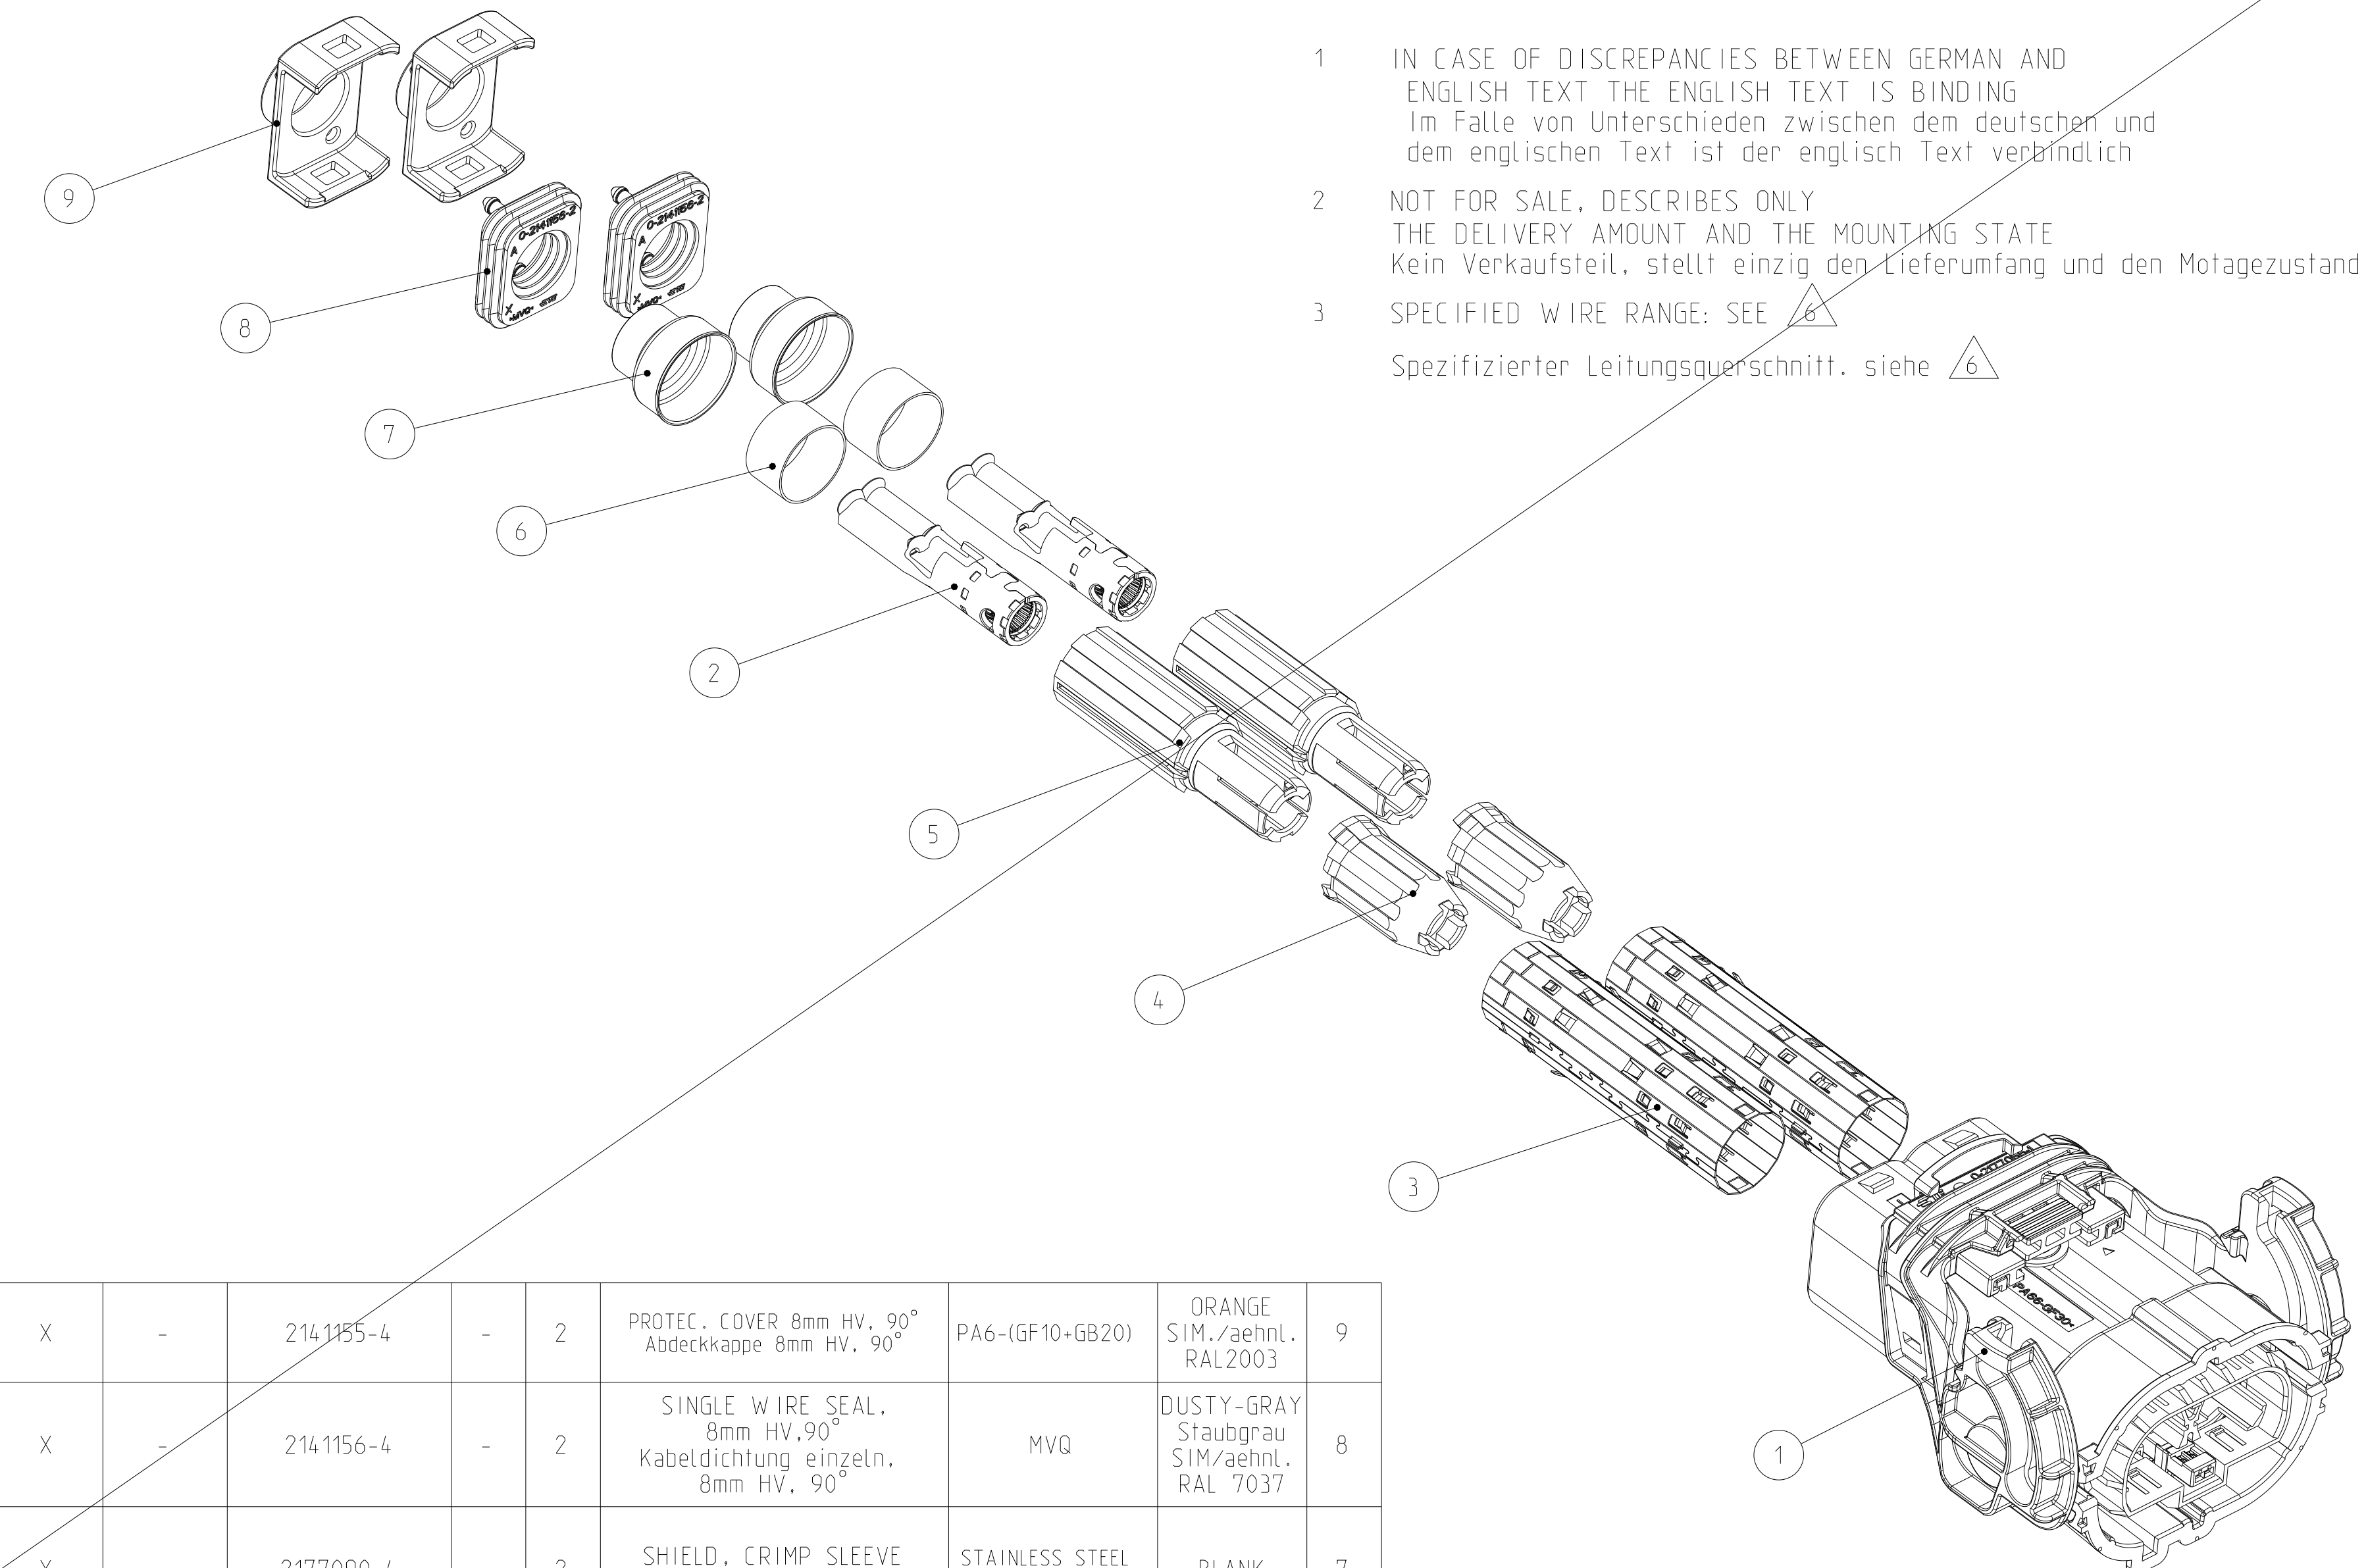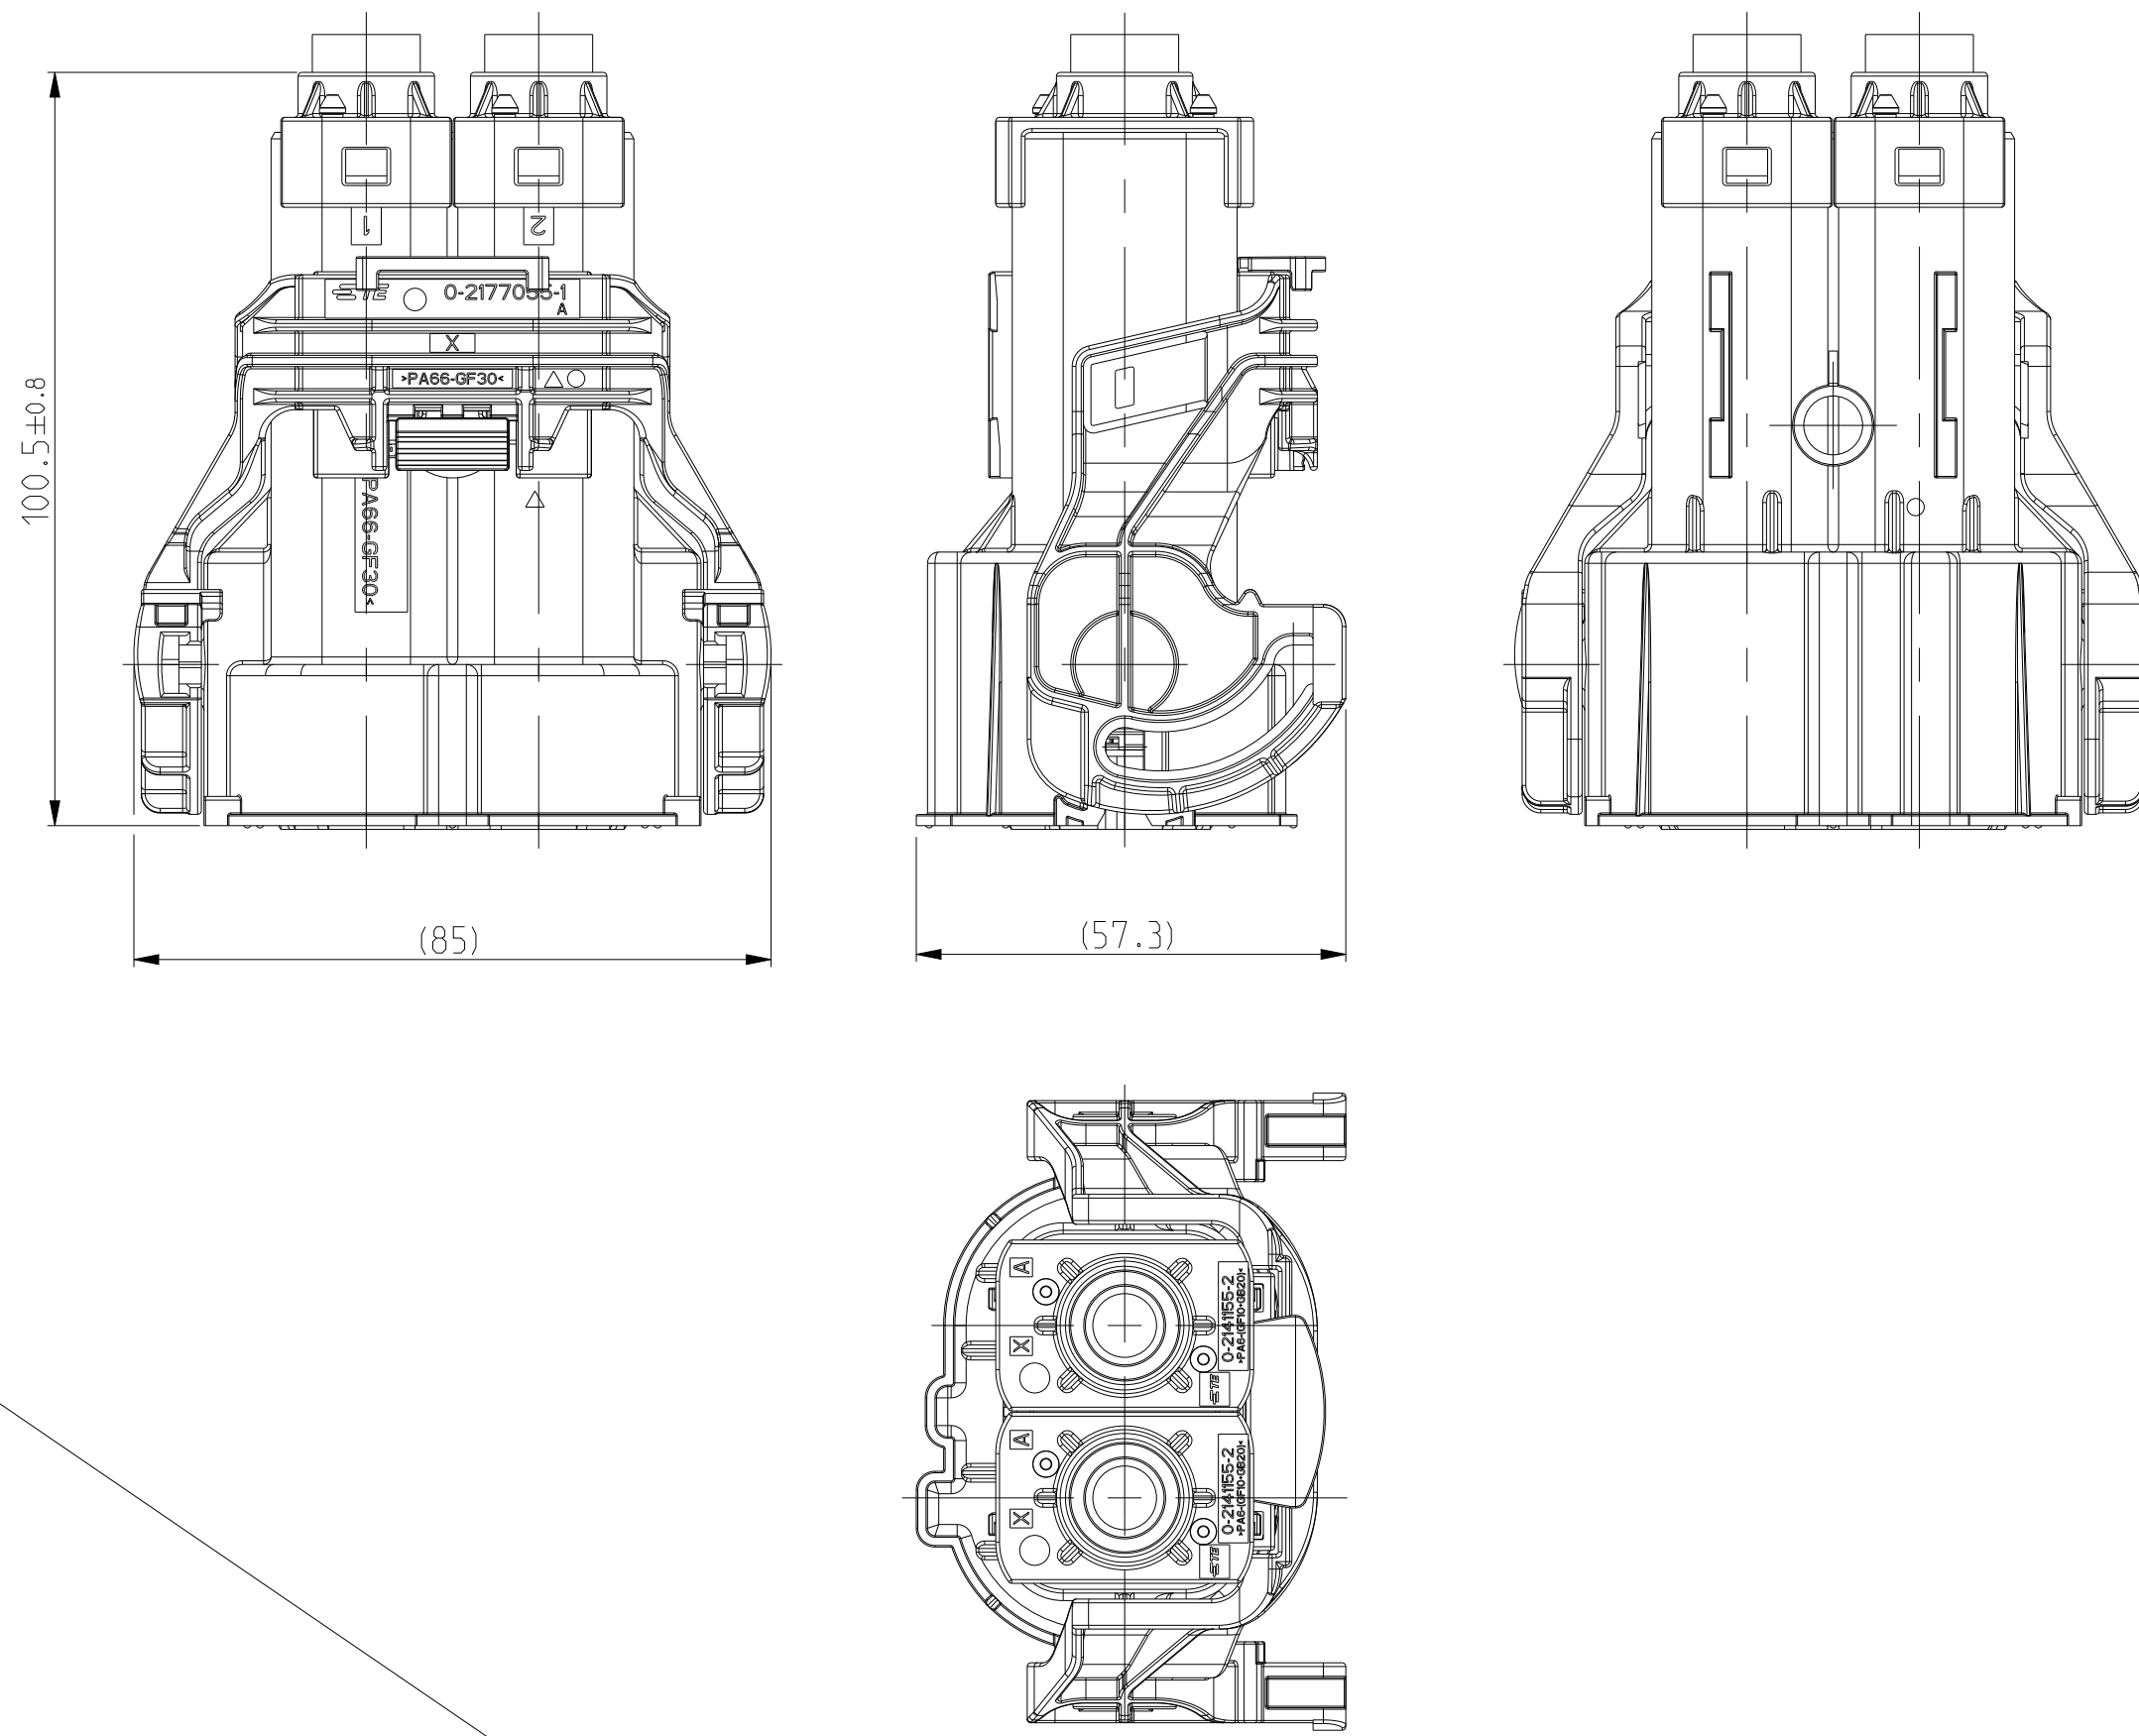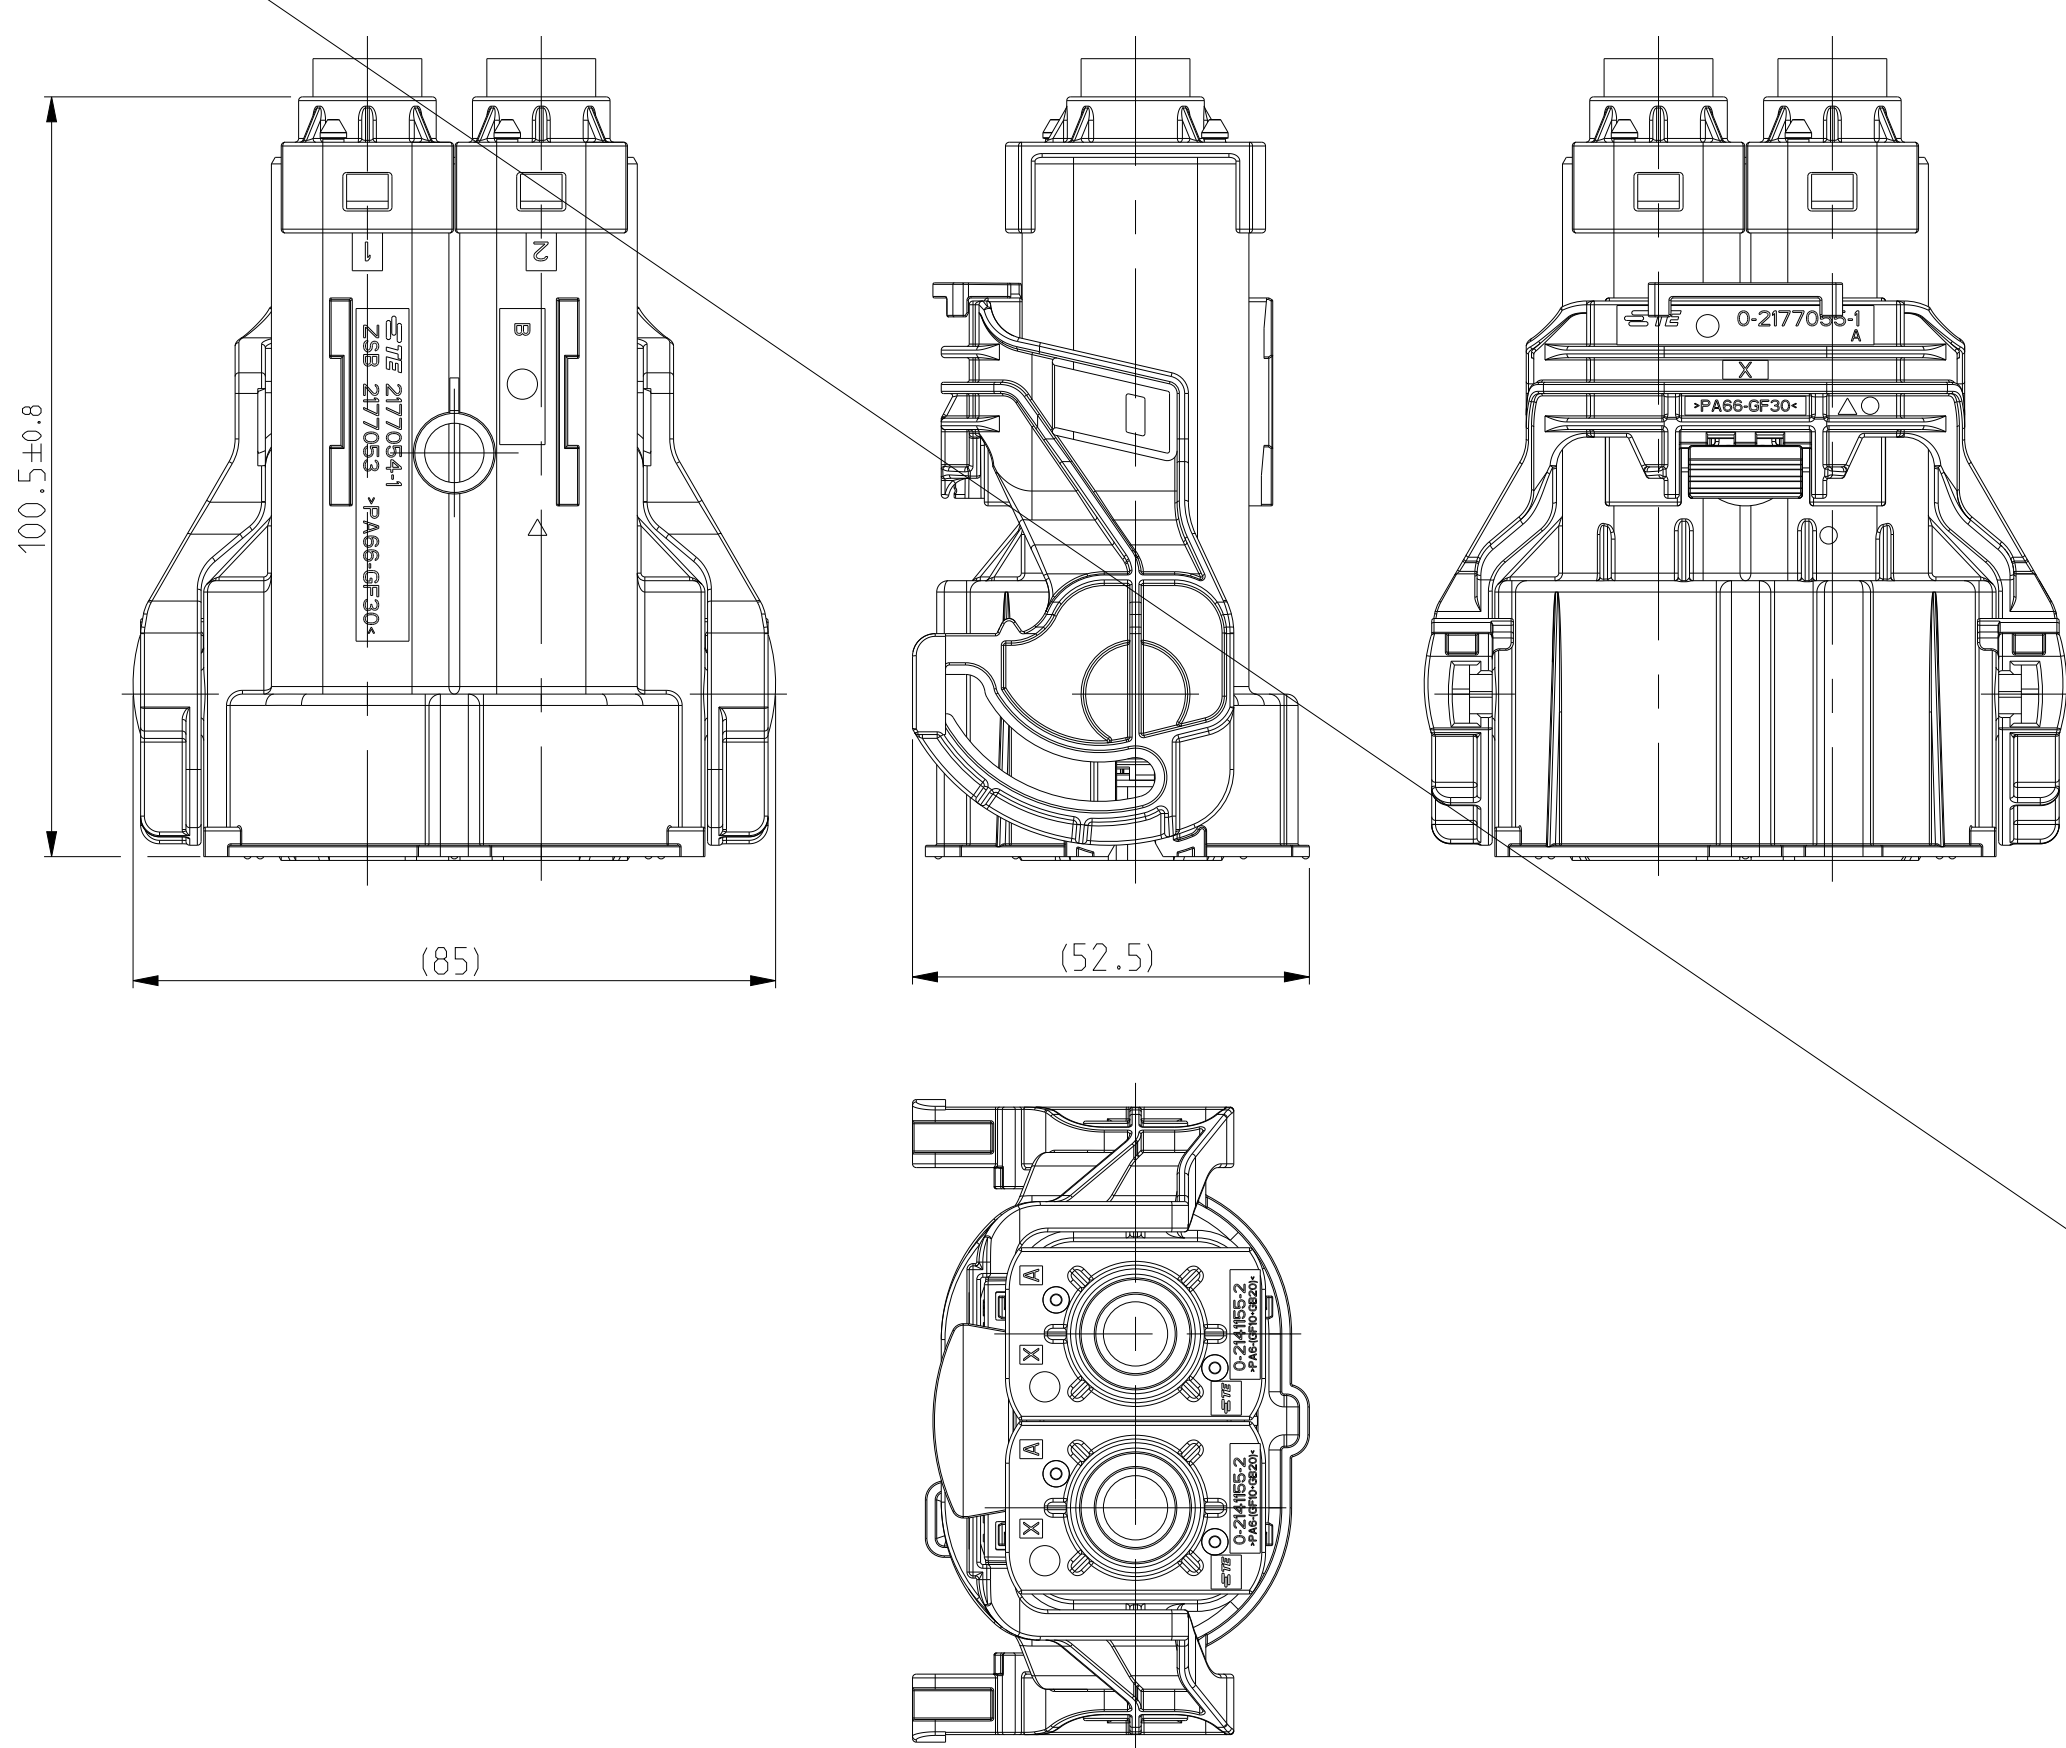


- 1 IN CASE OF DISCREPANCIES BETWEEN GERMAN AND ENGLISH TEXT THE ENGLISH TEXT IS BINDING  
Im Falle von Unterschieden zwischen dem deutschen und dem englischen Text ist der englisch Text verbindlich
- 2 NOT FOR SALE, DESCRIBES ONLY THE DELIVERY AMOUNT AND THE MOUNTING STATE  
Kein Verkaufsteil, stellt einzig den Lieferumfang und den Montagezustand dar
- 3 SPECIFIED WIRE RANGE: SEE △  
Spezifizierter Leitungsquerschnitt, siehe △

VERSION	CODE A	CODE B	CODE C	CODE D	CODE A	CODE B	CODE C	CODE D	MASS (g) Masse (g)	TE ORDER-NO. Bestell-Nr.:	CODE	QTY	PART DESCRIPTION Benennung Einzelteil	MATERIAL Werkstoff	COLOUR Farbe	ITEM
	○	○	○	○	△	△	△	△								
	X	X	X	X	X	X	X	X	-	2141155-2	-	2	PROTEC. COVER 8mm HV, 90° Abdeckkappe 8mm HV, 90°	PA6-(GF10-GB20)	ORANGE SIM./aehnl. RAL2003	9
	X	X	X	X	X	X	X	X	-	2141156-2	-	2	SINGLE WIRE SEAL, 8mm HV, 90° Kabeldichtung einzeln, 8mm HV, 90°	MVQ	NATURAL Transparent	8
	X	X	X	X	X	X	X	X	-	2177090-2	-	2	SHIELD, CRIMP SLEEVE Schirm, Crimpbuchse	STAINLESS STEEL Edelstahl	BLANK	7
	X	X	X	X	X	X	X	X	-	2177061-1 Alternative 2177061-2	-	2	SHIELD CRIMP FERRULE, INNER Untercrimpferrule	STAINLESS STEEL Edelstahl	BLANK	6
	X	X	X	X	X	X	X	X	-	2177058-1	-	2	INSULATION INSERT, 180° Isolationskoerper, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL 2003	5
	X	X	X	X	X	X	X	X	-	2177059-1	-	2	FINGER PROT CAP 8mm HV, 180° Fingerschutzkappe 8mm HV, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL2003	4
	X	X	X	X	X	X	X	X	-	2177060-4	-	2	SHIELDING SLEEVE, 180° Schirmhuese, 180°	CU - ALLOY Cu - Legierung	SELECTED SILVER- PLATED	3
	X	X	X	X	X	X	X	X	-	2208608-3	-	2	HV8mm SOCKET TERMINAL 180° Kontaktbuehse, 180°	siehe C-2351897	-	2
	-	-	X	-	-	-	-	-	-	1-2177053-8	D	-	2POS, 8mm HV, REC HSG, 180°, ASSY, SEALED 2pol, gedichtete Assy, 8mm HV, 180°	siehe C-2177053	siehe C-2177053	1
	-	-	X	-	-	-	-	-	-	1-2177053-6	C	-				
	-	-	X	-	-	-	-	-	-	1-2177053-4	B	-				
	X	-	-	-	-	-	-	-	-	1-2177053-2	A	-				
	-	-	-	-	-	-	X	-	-	1-2177053-7	D	-				
	-	-	-	-	-	X	-	-	-	1-2177053-5	C	-				
	-	-	-	-	X	-	-	-	-	1-2177053-3	B	-				
	-	-	-	X	-	-	-	-	-	1-2177053-1	A	-				

VERSION	CODE A	CODE B	CODE C	CODE D	CODE A	CODE B	CODE C	CODE D	MASS (g) Masse (g)	TE ORDER-NO. Bestell-Nr.:	CODE	QTY	PART DESCRIPTION Benennung Einzelteil	MATERIAL Werkstoff	COLOUR Farbe	ITEM
	○	○	○	○	△	△	△	△								
	X	X	X	X	X	X	X	X	-	2141155-4	-	2	PROTEC. COVER 8mm HV, 90° Abdeckkappe 8mm HV, 90°	PA6-(GF10-GB20)	ORANGE SIM./aehnl. RAL2003	9
	X	X	X	X	X	X	X	X	-	2141156-4	-	2	SINGLE WIRE SEAL, 8mm HV, 90° Kabeldichtung einzeln, 8mm HV, 90°	MVQ	DUSTY-GRAY Staubgrau SIM./aehnl. RAL 7037	8
	X	X	X	X	X	X	X	X	-	2177090-4	-	2	SHIELD, CRIMP SLEEVE Schirm, Crimpbuchse	STAINLESS STEEL Edelstahl	BLANK	7
	X	X	X	X	X	X	X	X	-	2177061-1 Alternative 2177061-2	-	2	SHIELD CRIMP FERRULE, INNER Untercrimpferrule	STAINLESS STEEL Edelstahl	BLANK	6
	X	X	X	X	X	X	X	X	-	2177058-1	-	2	INSULATION INSERT, 180° Isolationskoerper, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL 2003	5
	X	X	X	X	X	X	X	X	-	2177059-1	-	2	FINGER PROT CAP 8mm HV, 180° Fingerschutzkappe 8mm HV, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL2003	4
	X	X	X	X	X	X	X	X	-	2177060-4	-	2	SHIELDING SLEEVE, 180° Schirmhuese, 180°	CU - ALLOY Cu - Legierung	SELECTED SILVER- PLATED	3
	X	X	X	X	X	X	X	X	-	2208669-3	-	2	HV8mm SOCKET TERMINAL 180° Kontaktbuehse, 180°	siehe C-2351897	-	2
	-	-	X	-	-	-	-	-	-	1-2177053-8	D	-	2POS, 8mm HV, REC HSG, 180°, ASSY, SEALED 2pol, gedichtete Assy, 8mm HV, 180°	siehe C-2177053	siehe C-2177053	1
	-	-	X	-	-	-	-	-	-	1-2177053-6	C	-				
	-	-	X	-	-	-	-	-	-	1-2177053-4	B	-				
	X	-	-	-	-	-	-	-	-	1-2177053-2	A	-				
	-	-	-	-	-	-	X	-	-	1-2177053-7	D	-				
	-	-	-	-	-	X	-	-	-	1-2177053-5	C	-				
	-	-	-	-	X	-	-	-	-	1-2177053-3	B	-				
	-	-	-	X	-	-	-	-	-	1-2177053-1	A	-				

CODINGS/Codierung

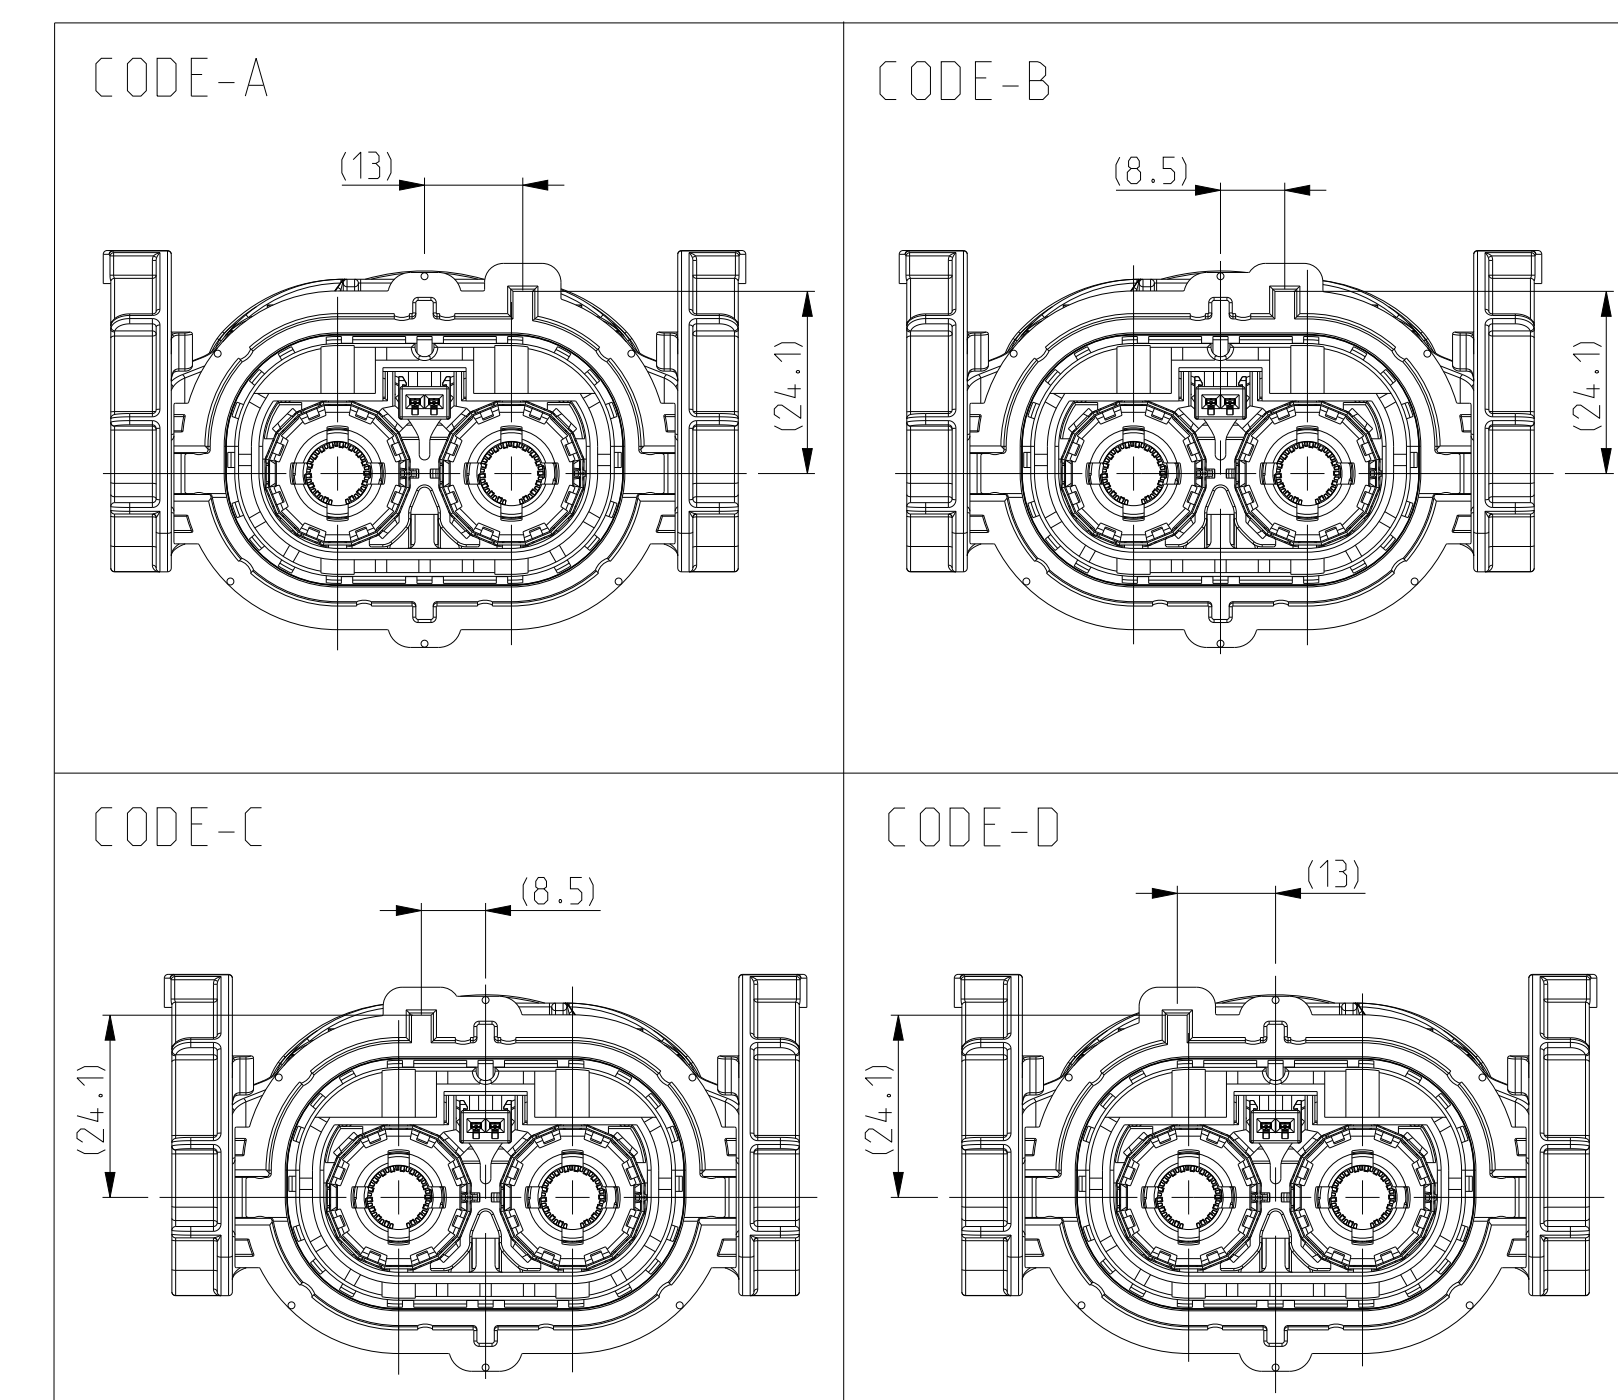

VERSION	CODE A	CODE B	CODE C	CODE D	CODE A	CODE B	CODE C	CODE D	MASS (g) Masse (g)	TE ORDER-NO. Bestell-Nr.:	CODE	QTY	PART DESCRIPTION Benennung Einzelteil	MATERIAL Werkstoff	COLOUR Farbe	ITEM
	○	○	○	○	△	△	△	△								
	X	X	X	X	X	X	X	X	-	2141155-1	-	2	PROTEC. COVER 8mm HV, 90° Abdeckkappe 8mm HV, 90°	PA6-(GF10-GB20)	ORANGE SIM./aehnl. RAL2003	9
	X	X	X	X	X	X	X	X	-	2141156-1	-	2	SINGLE WIRE SEAL, 8mm HV, 90° Kabeldichtung einzeln, 8mm HV, 90°	MVQ	GRASS GREEN Grasgruen SIM./aehnl. RAL 6010	8
	X	X	X	X	X	X	X	X	-	2177090-1	-	2	SHIELD, CRIMP SLEEVE Schirm, Crimpbuchse	STAINLESS STEEL Edelstahl	BLANK	7
	X	X	X	X	X	X	X	X	-	2177061-1 Alternative 2177061-2	-	2	SHIELD CRIMP FERRULE, INNER Untercrimpferrule	STAINLESS STEEL Edelstahl	BLANK	6
	X	X	X	X	X	X	X	X	-	2177058-1	-	2	INSULATION INSERT, 180° Isolationskoerper, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL 2003	5
	X	X	X	X	X	X	X	X	-	2177059-1	-	2	FINGER PROT CAP 8mm HV, 180° Fingerschutzkappe 8mm HV, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL2003	4
	X	X	X	X	X	X	X	X	-	2177060-4	-	2	SHIELDING SLEEVE, 180° Schirmhuese, 180°	CU - ALLOY Cu - Legierung	SELECTED SILVER- PLATED	3
	X	X	X	X	X	X	X	X	-	2208608-3	-	2	HV8mm SOCKET TERMINAL 180° Kontaktbuehse, 180°	siehe C-2351897	-	2
	-	-	X	-	-	-	-	-	-	1-2177053-8	D	-	2POS, 8mm HV, REC HSG, 180°, ASSY, SEALED 2pol, gedichtete Assy, 8mm HV, 180°	siehe C-2177053	siehe C-2177053	1
	-	-	X	-	-	-	-	-	-	1-2177053-6	C	-				
	-	-	X	-	-	-	-	-	-	1-2177053-4	B	-				
	X	-	-	-	-	-	-	-	-	1-2177053-2	A	-				
	-	-	-	-	-	-	X	-	-	1-2177053-7	D	-				
	-	-	-	-	-	X	-	-	-	1-2177053-5	C	-				
	-	-	-	-	X	-	-	-	-	1-2177053-3	B	-				
	-	-	-	X	-	-	-	-	-	1-2177053-1	A	-				

VERSION	CODE A	CODE B	CODE C	CODE D	CODE A	CODE B	CODE C	CODE D	MASS (g) Masse (g)	TE ORDER-NO. Bestell-Nr.:	CODE	QTY	PART DESCRIPTION Benennung Einzelteil	MATERIAL Werkstoff	COLOUR Farbe	ITEM
	○	○	○	○	△	△	△	△								
	X	X	X	X	X	X	X	X	-	2141155-3	-	2	PROTEC. COVER 8mm HV, 90° Abdeckkappe 8mm HV, 90°	PA6-(GF10-GB20)	ORANGE SIM./aehnl. RAL2003	9
	X	X	X	X	X	X	X	X	-	2141156-3	-	2	SINGLE WIRE SEAL, 8mm HV, 90° Kabeldichtung einzeln, 8mm HV, 90°	MVQ	WHITE/ Weiss SIM./aehnl. RAL 9010	8
	X	X	X	X	X	X	X	X	-	2177090-3	-	2	SHIELD, CRIMP SLEEVE Schirm, Crimpbuchse	STAINLESS STEEL Edelstahl	BLANK	7
	X	X	X	X	X	X	X	X	-	2177061-1 Alternative 2177061-2	-	2	SHIELD CRIMP FERRULE, INNER Untercrimpferrule	STAINLESS STEEL Edelstahl	BLANK	6
	X	X	X	X	X	X	X	X	-	2177058-1	-	2	INSULATION INSERT, 180° Isolationskoerper, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL 2003	5
	X	X	X	X	X	X	X	X	-	2177059-1	-	2	FINGER PROT CAP 8mm HV, 180° Fingerschutzkappe 8mm HV, 180°	PA66-GF30	ORANGE SIM./aehnl. RAL2003	4
	X	X	X	X	X	X	X	X	-	2177060-4	-	2	SHIELDING SLEEVE, 180° Schirmhuese, 180°	CU - ALLOY Cu - Legierung	SELECTED SILVER- PLATED	3
	X	X	X	X	X	X	X	X	-	2208669-3	-	2	HV8mm SOCKET TERMINAL 180° Kontaktbuehse, 180°	siehe C-2351897	-	2
	-	-	X	-	-	-	-	-	-	1-2177053-8	D	-	2POS, 8mm HV, REC HSG, 180°, ASSY, SEALED 2pol, gedichtete Assy, 8mm HV, 180°	siehe C-2177053	siehe C-2177053	1
	-	-	X	-	-	-	-	-	-	1-2177053-6	C	-				
	-	-	X	-	-	-	-	-	-	1-2177053-4	B	-				
	X	-	-	-	-	-	-	-	-	1-2177053-2	A	-				
	-	-	-	-	-	-	X	-	-	1-2177053-7	D	-				
	-	-	-	-	-	X	-	-	-	1-2177053-5	C	-				
	-	-	-	-	X	-	-	-	-	1-2177053-3	B	-				
	-	-	-	X	-	-	-	-	-	1-2177053-1	A	-				

NOTE Bem.	FEATURE Merkmal
△ PRODUCT SPEC. 108-94297 Produkt-Spez.	
△ APPLICATION SPEC. 114-94130 Verarbeitungsspez.	

TE CONNECTIVITY



TE Connectivity

2POS 8mm HV KIT, 180DEG, SEALED  
2pol 8mm HV Kit, 180Grad, gedichtet  
OVERVIEW / Uebersicht, ASSY


SCALE 1:1

DATE 11.04.2024









REV A.7

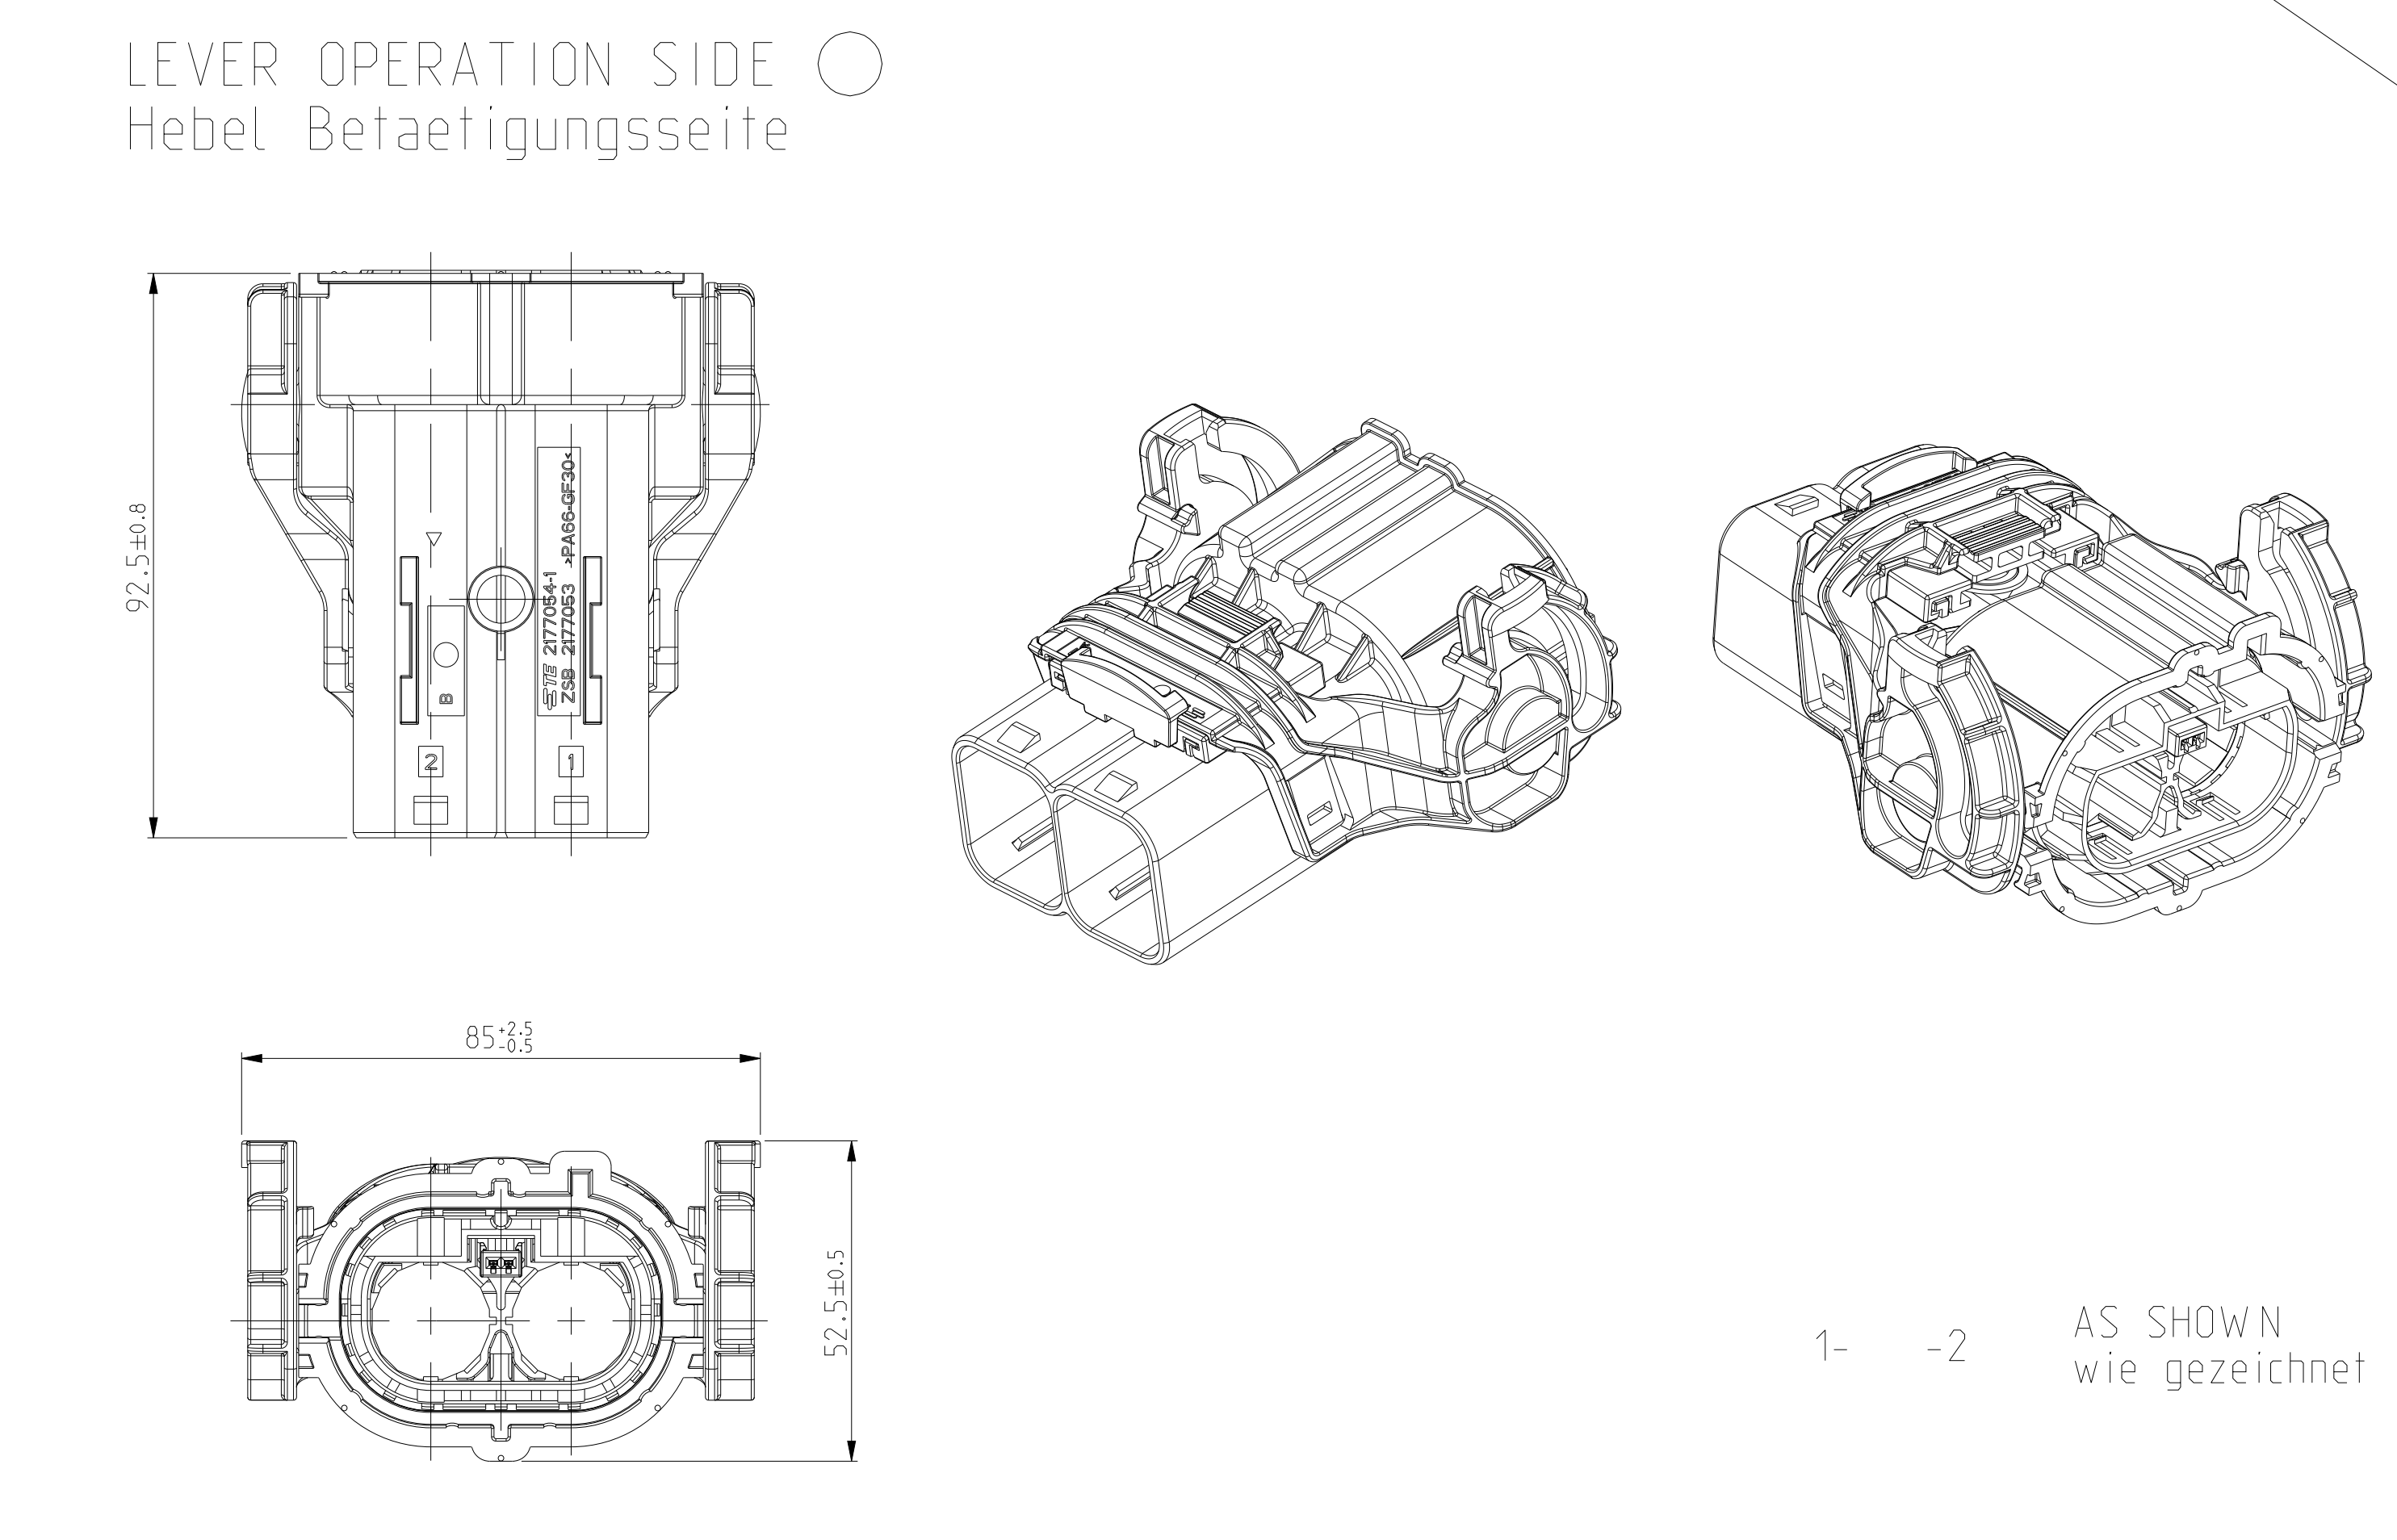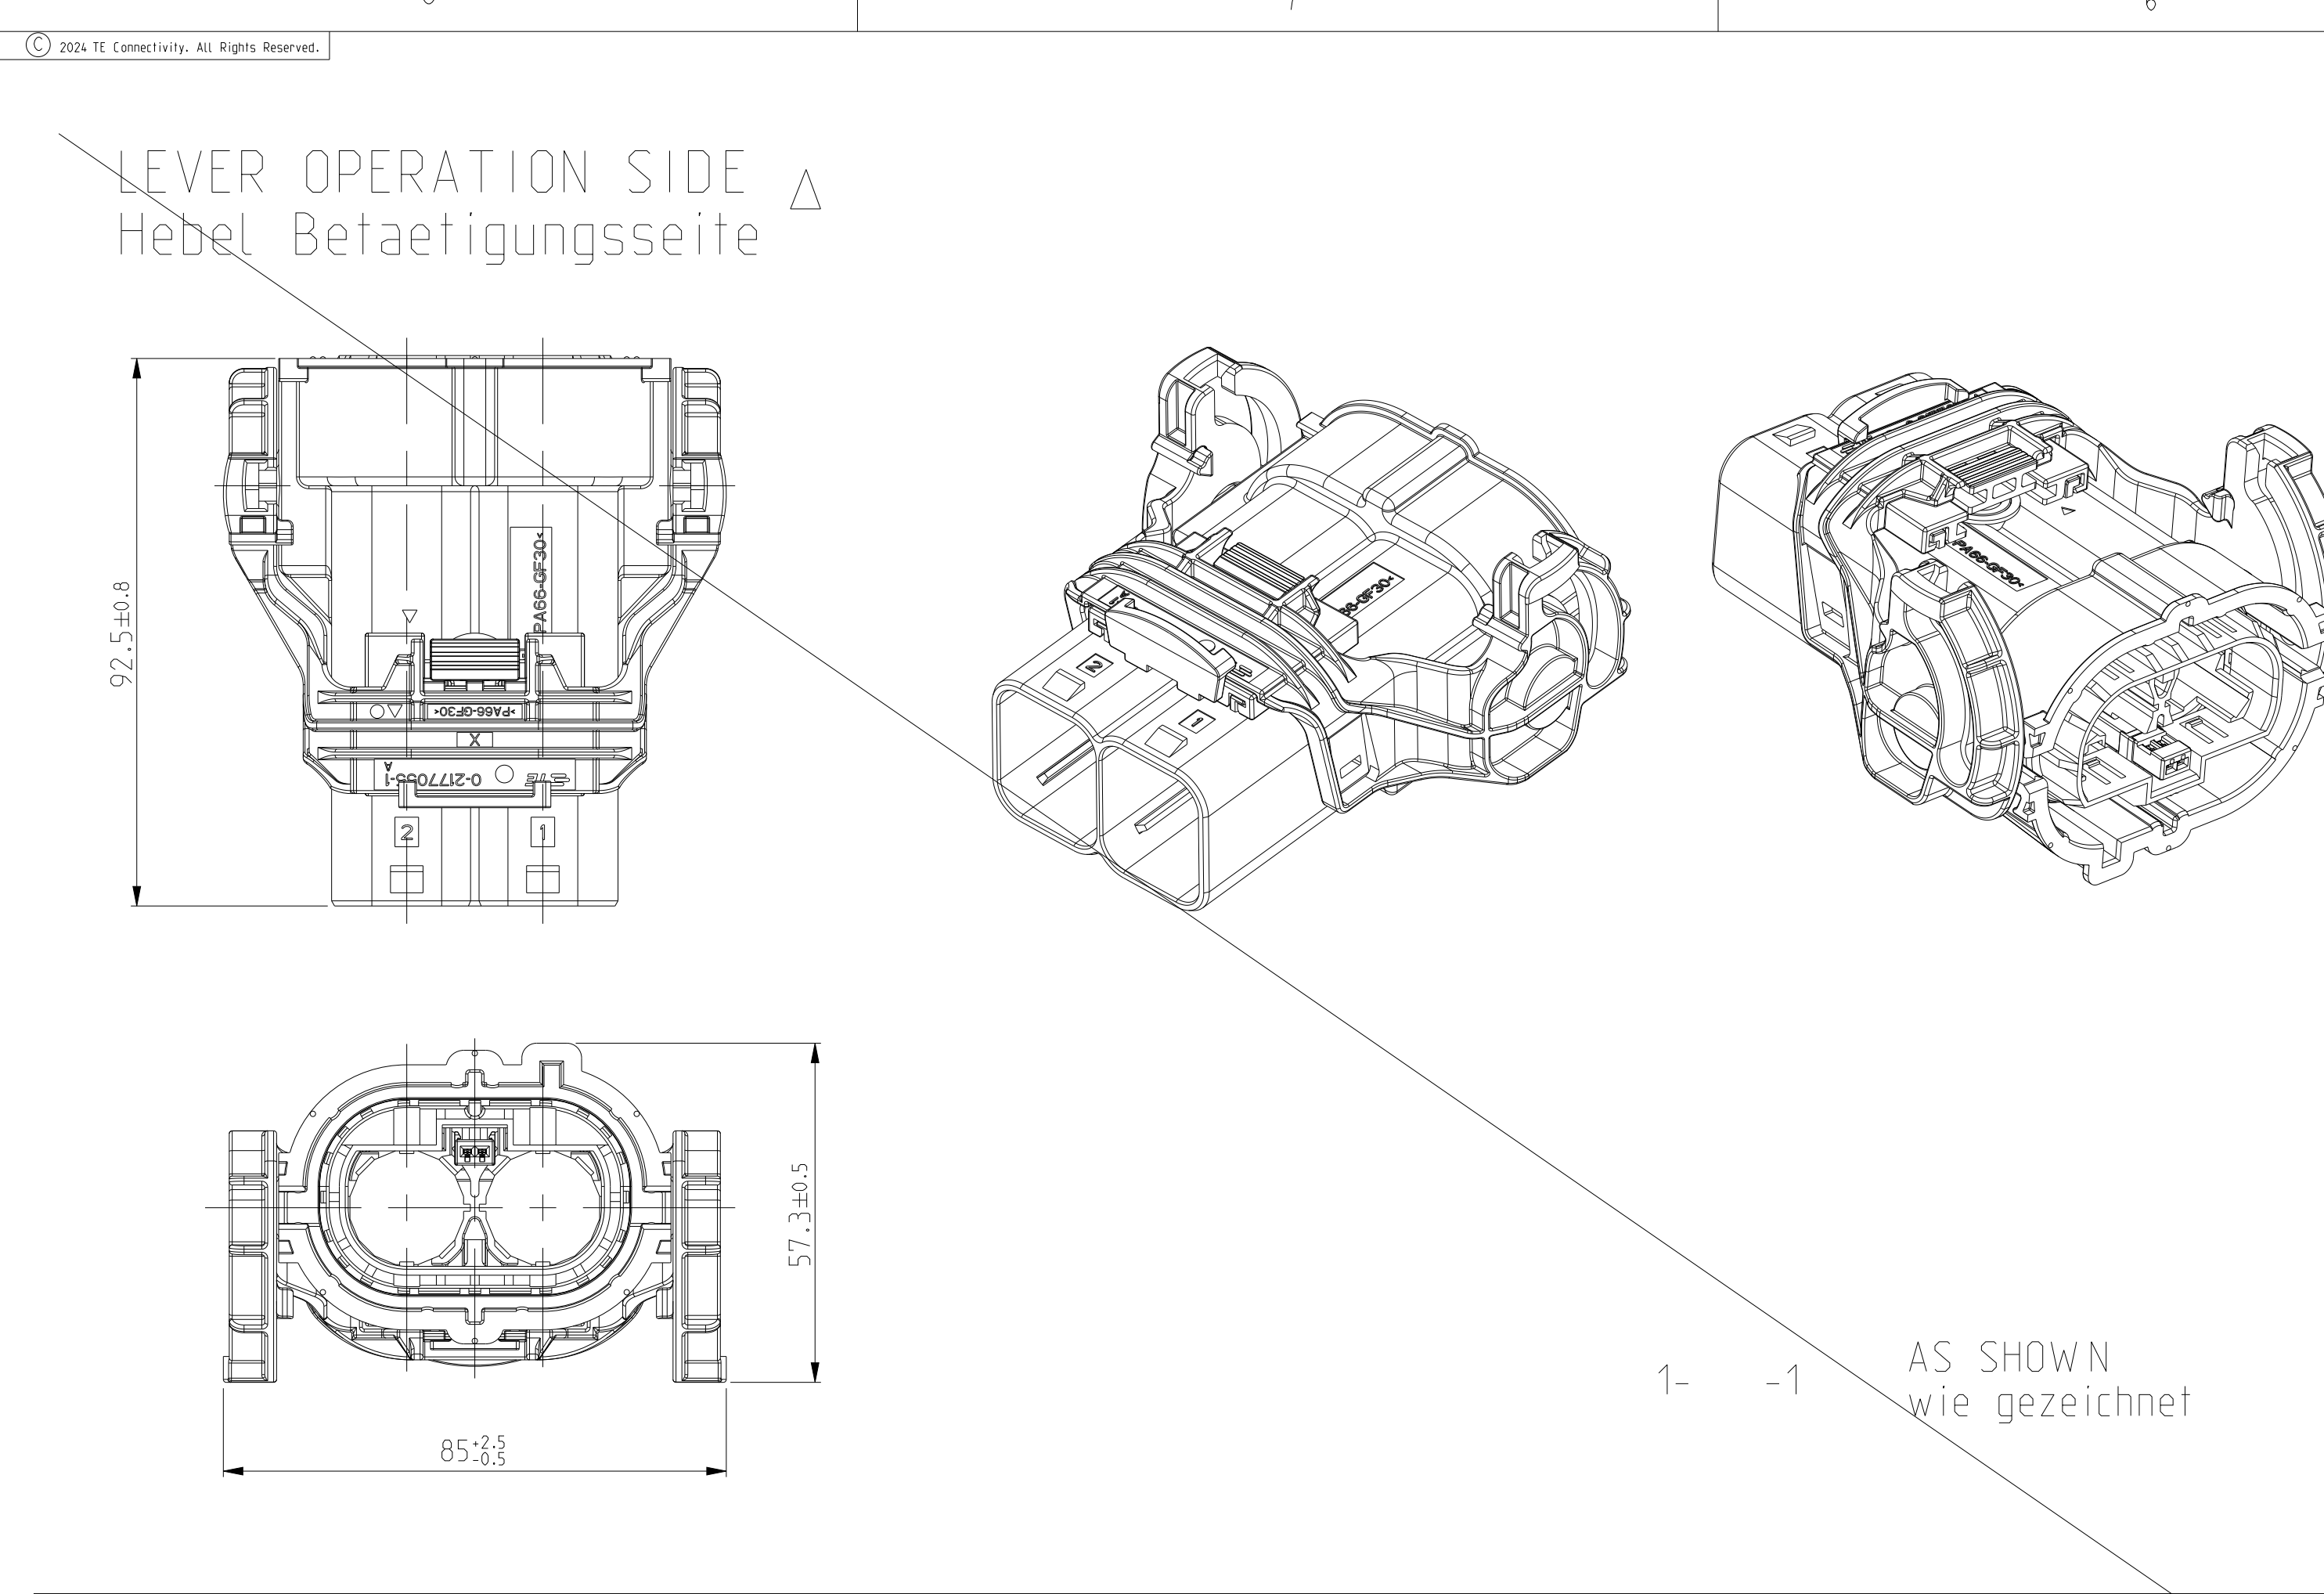

CODINGS/Codierung  
1:1

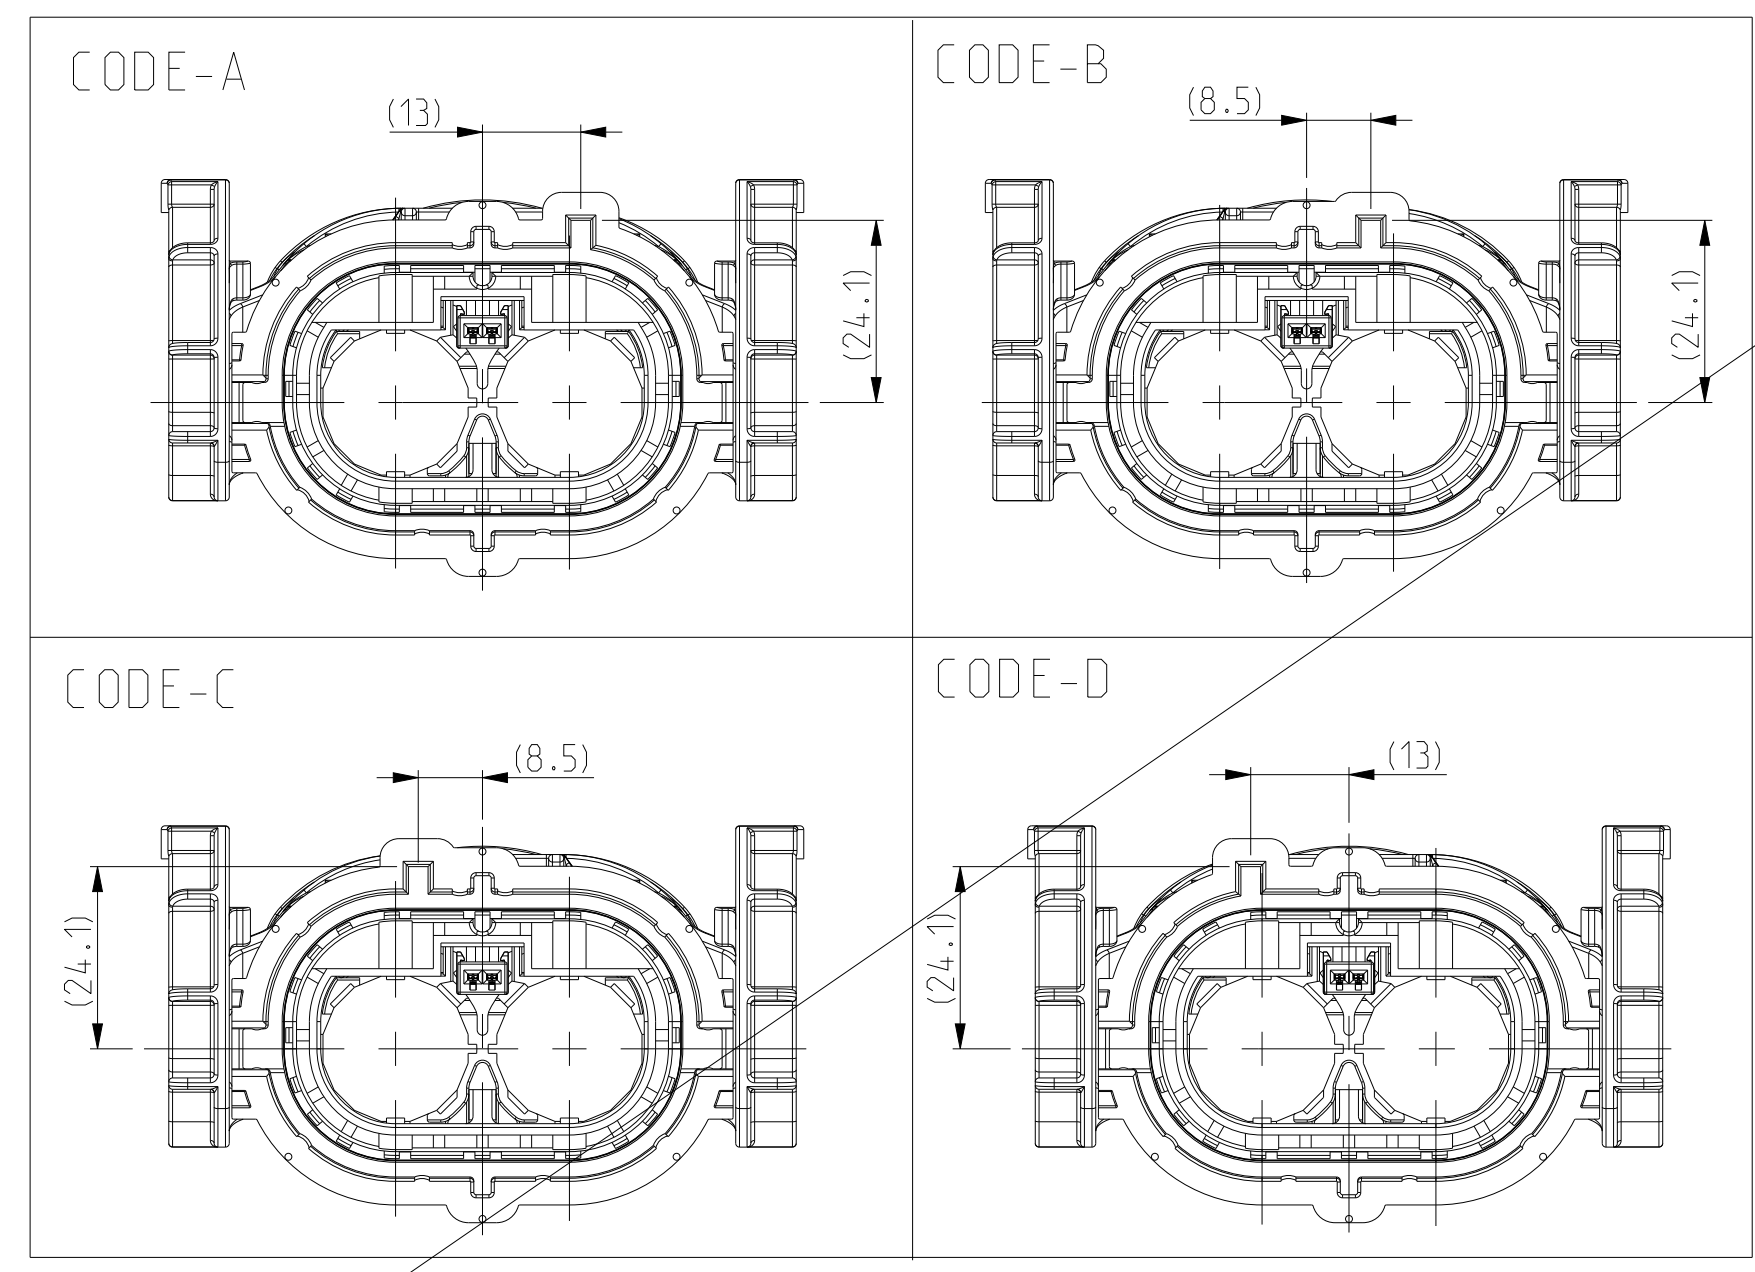

POS	DESCRIPTION
1	2POS, 8mm HV, REC HSG, 180°, ASSY, SEALED 2pol, gedichtete Assy, 8mm HV, 180°

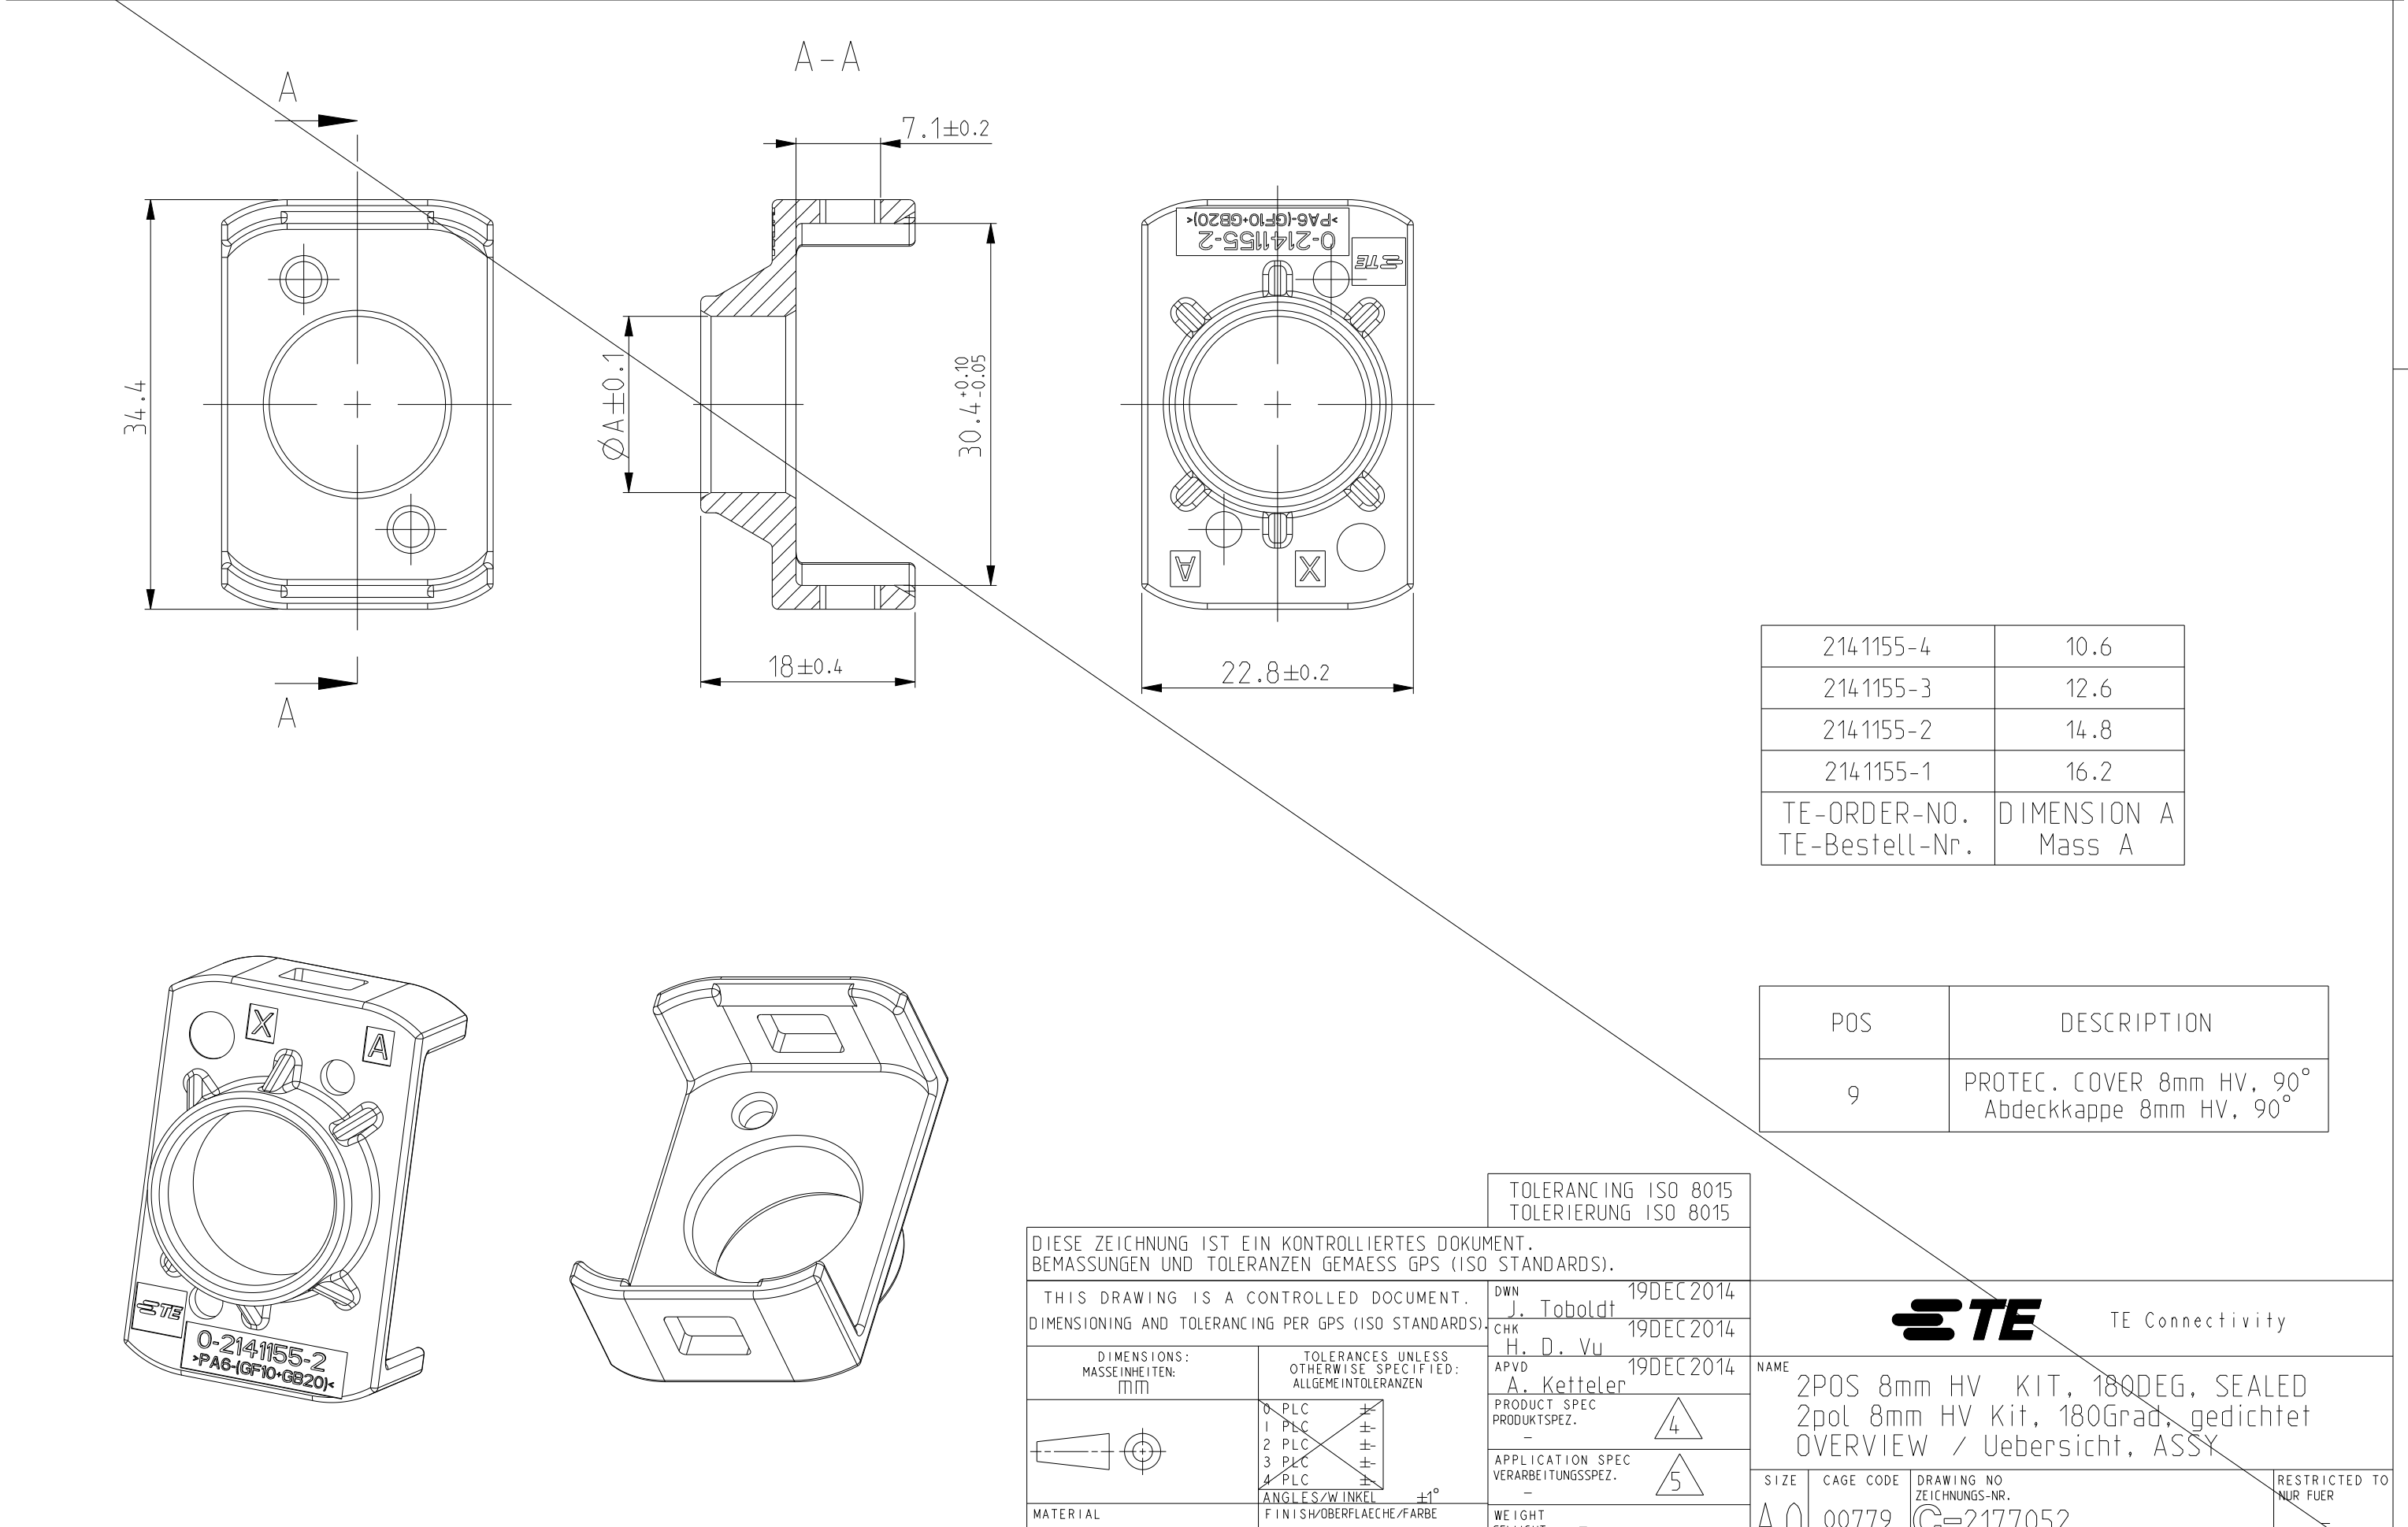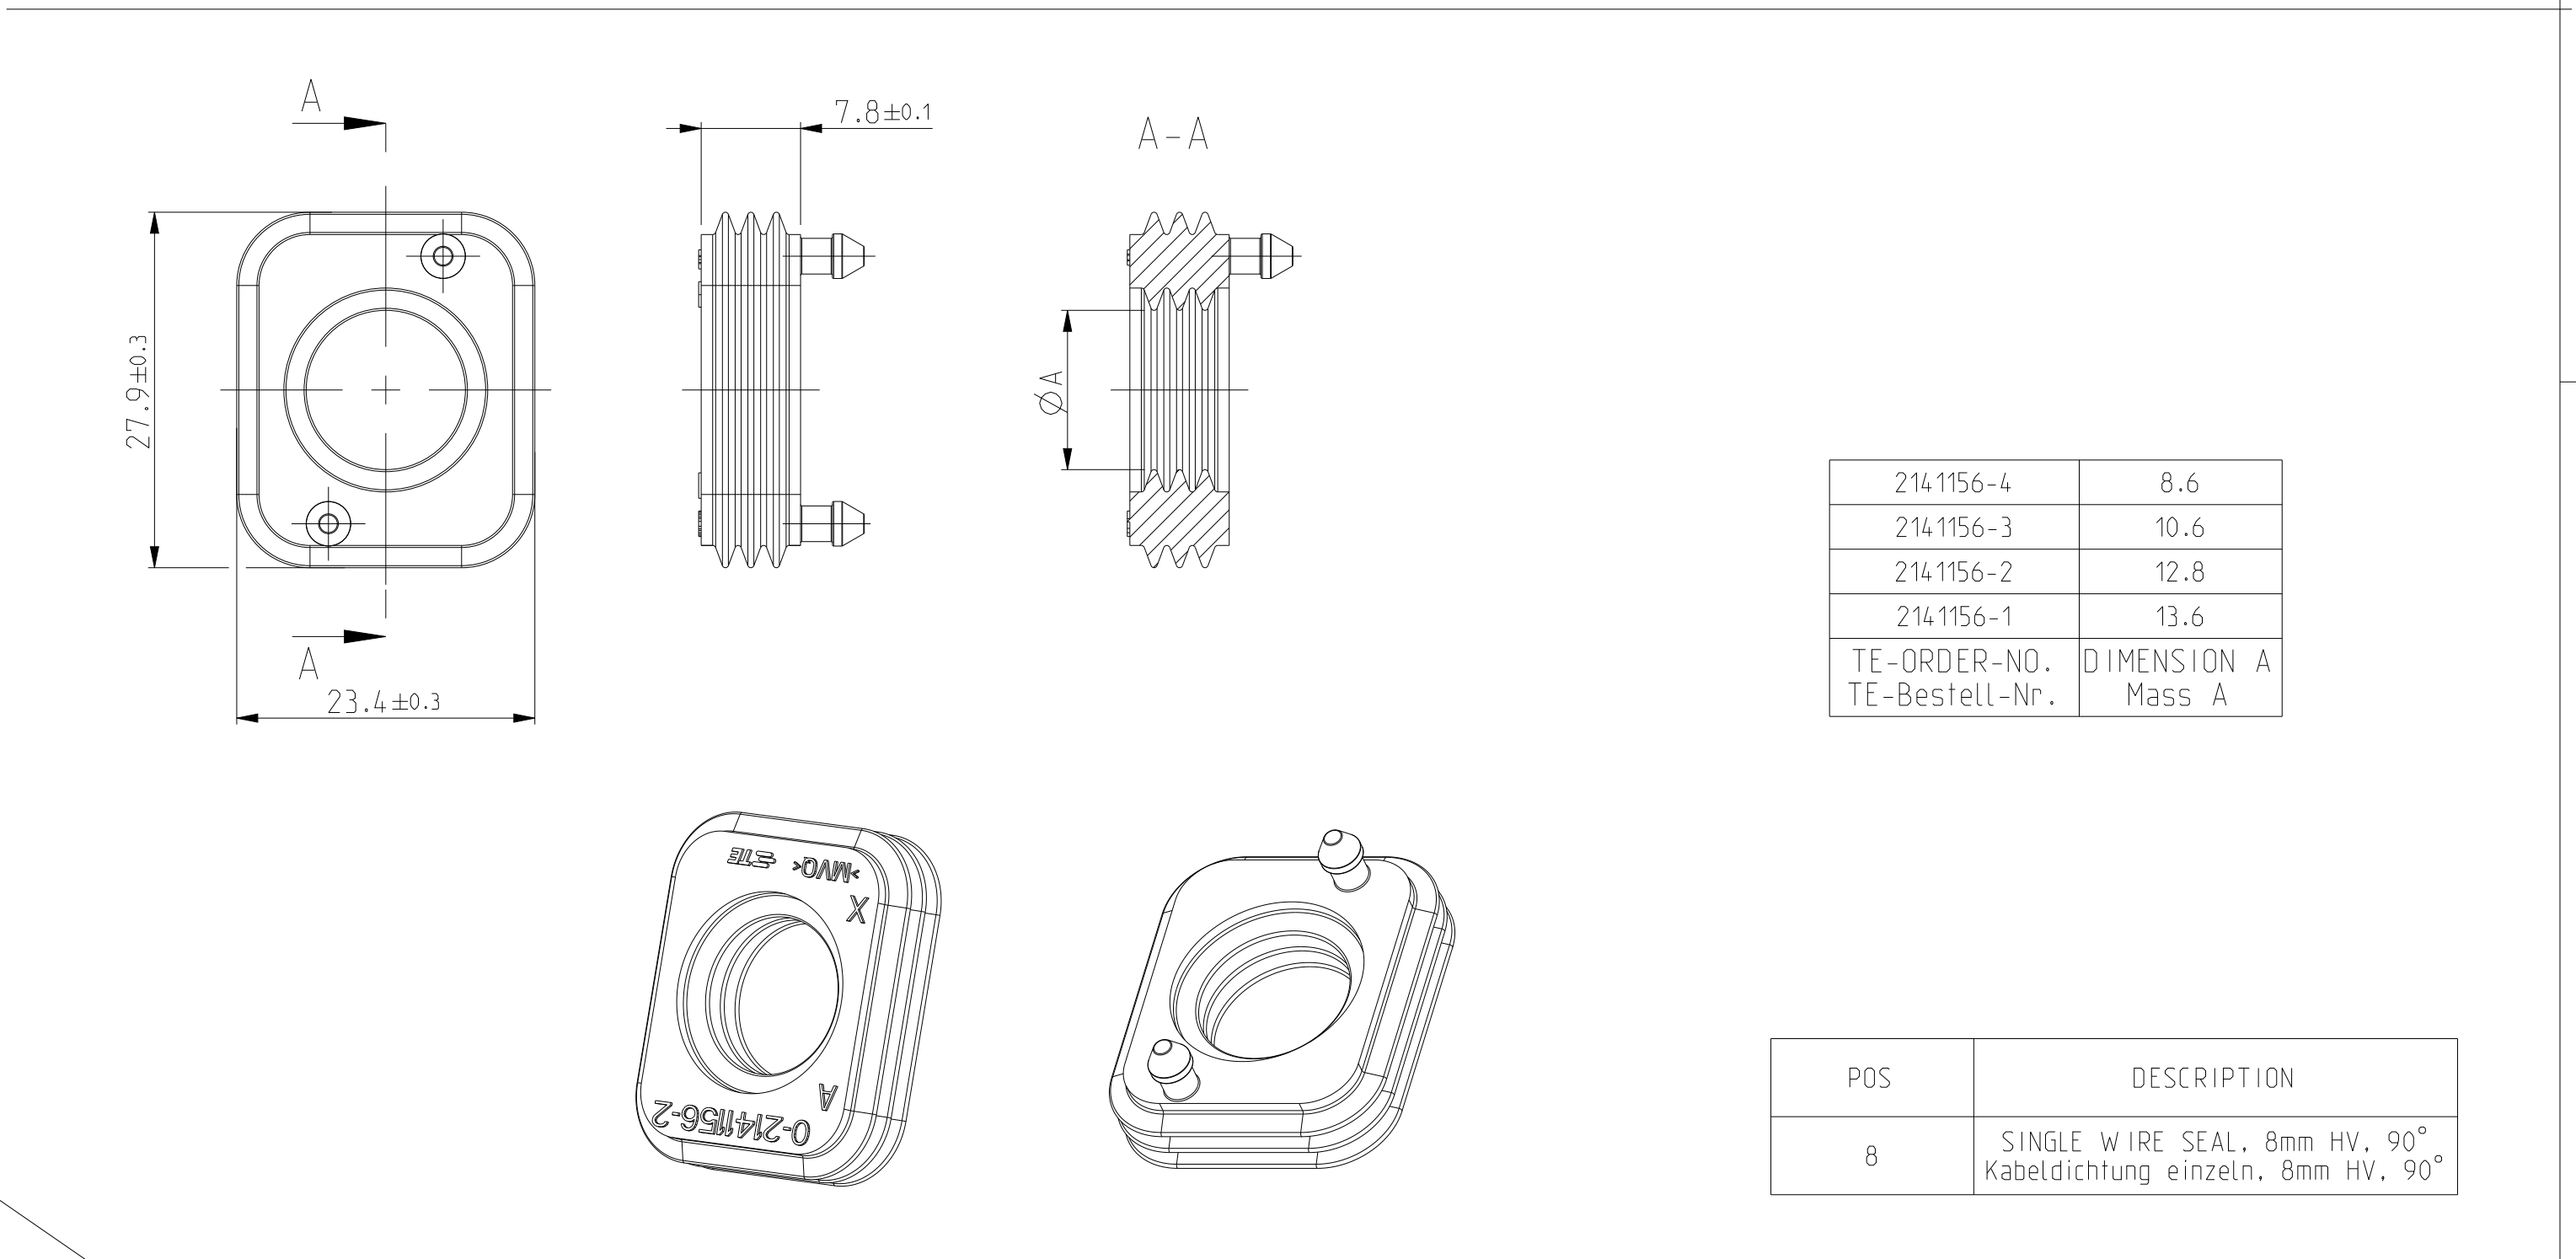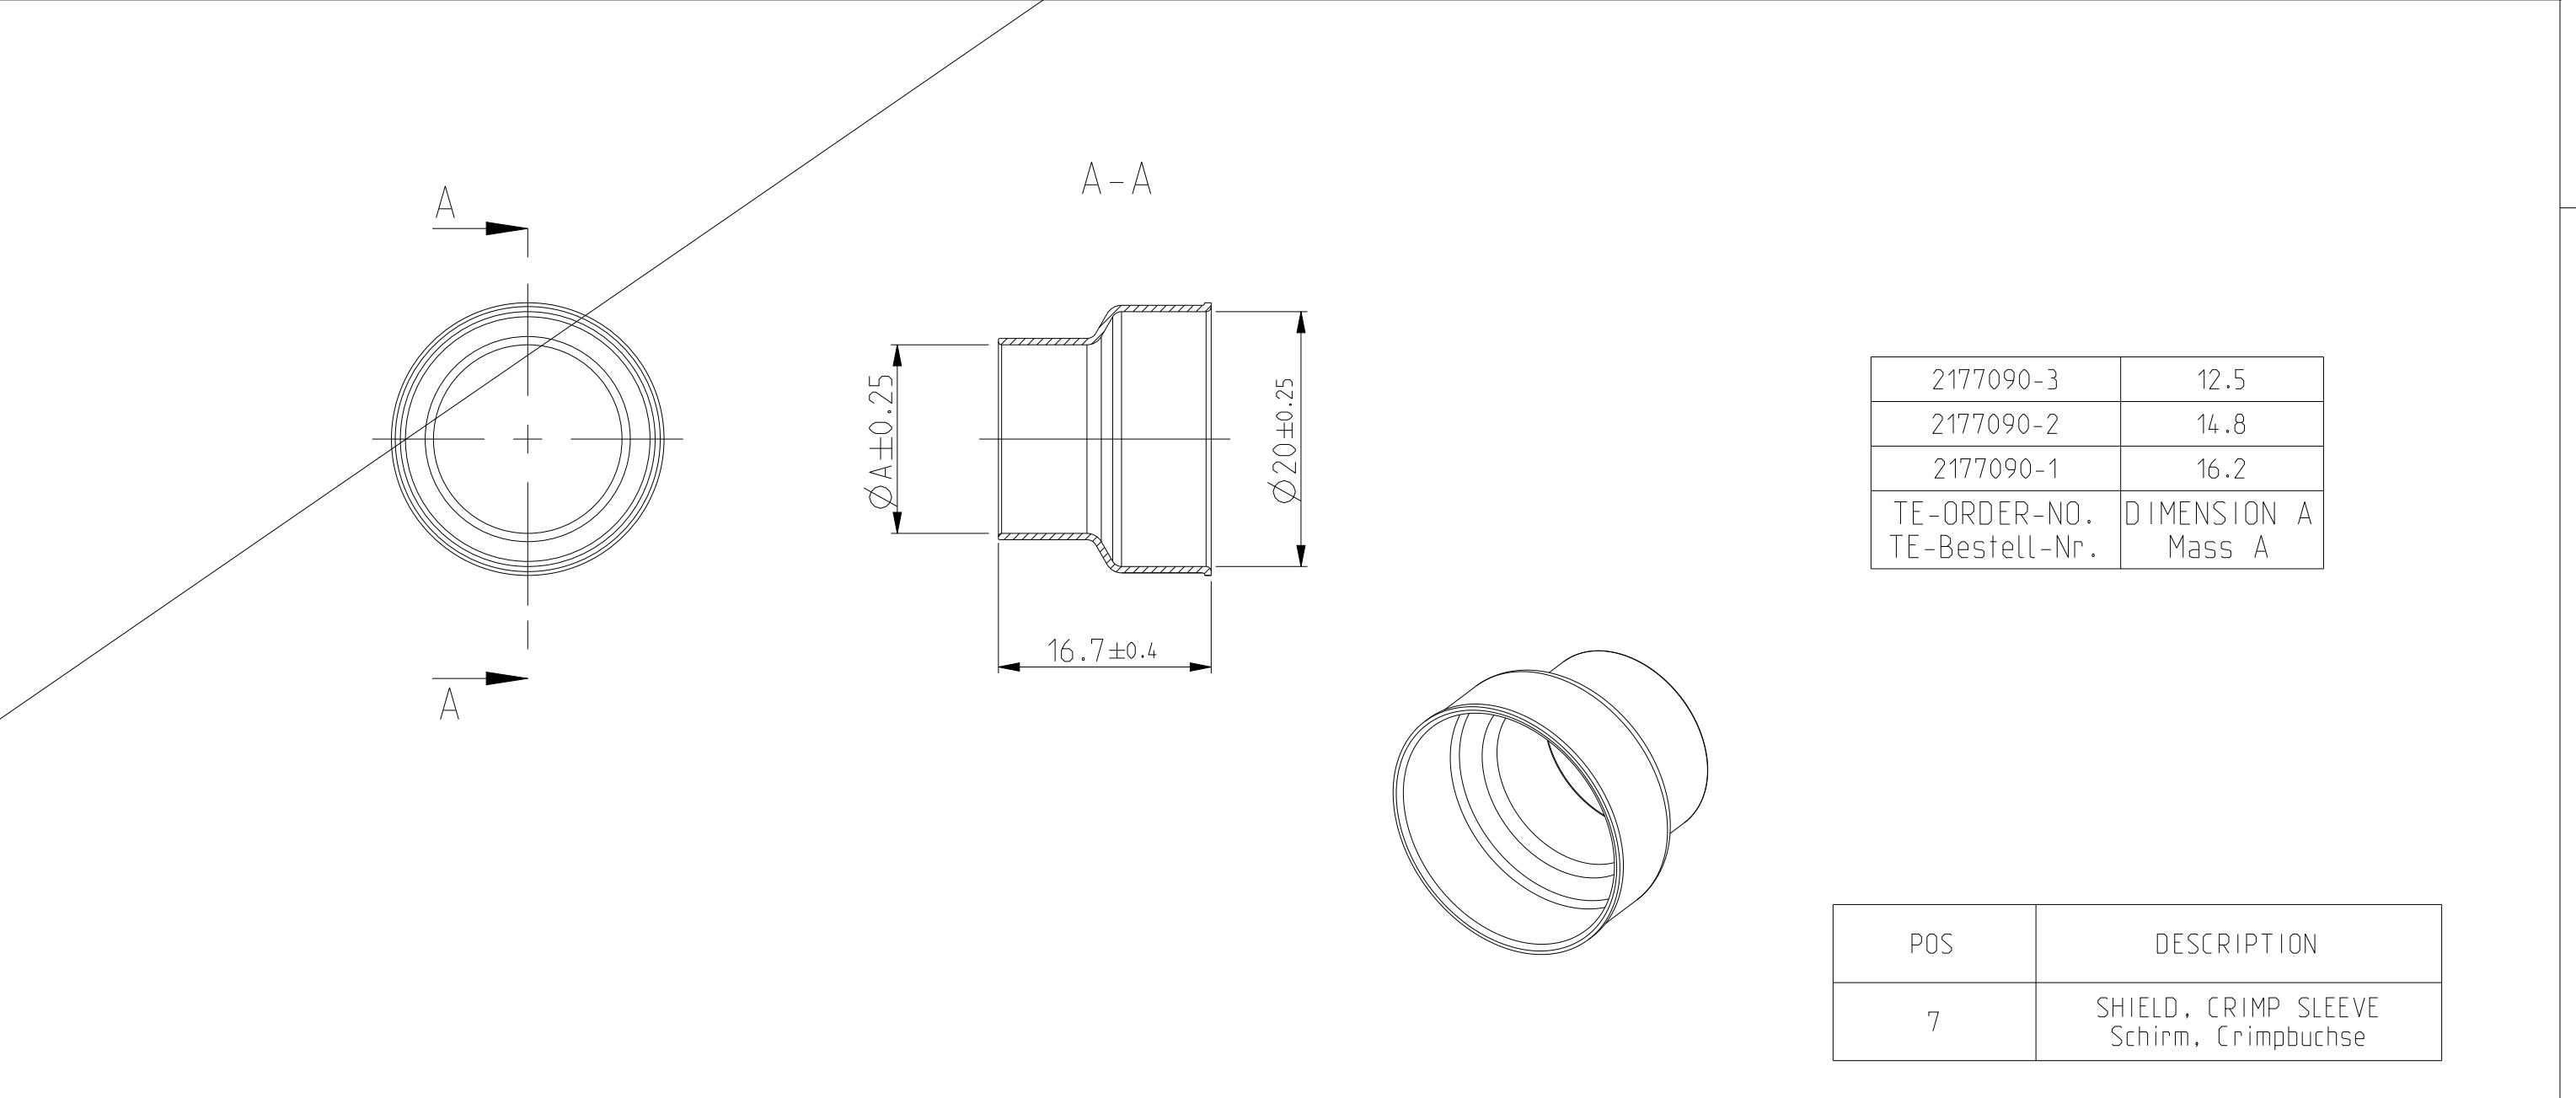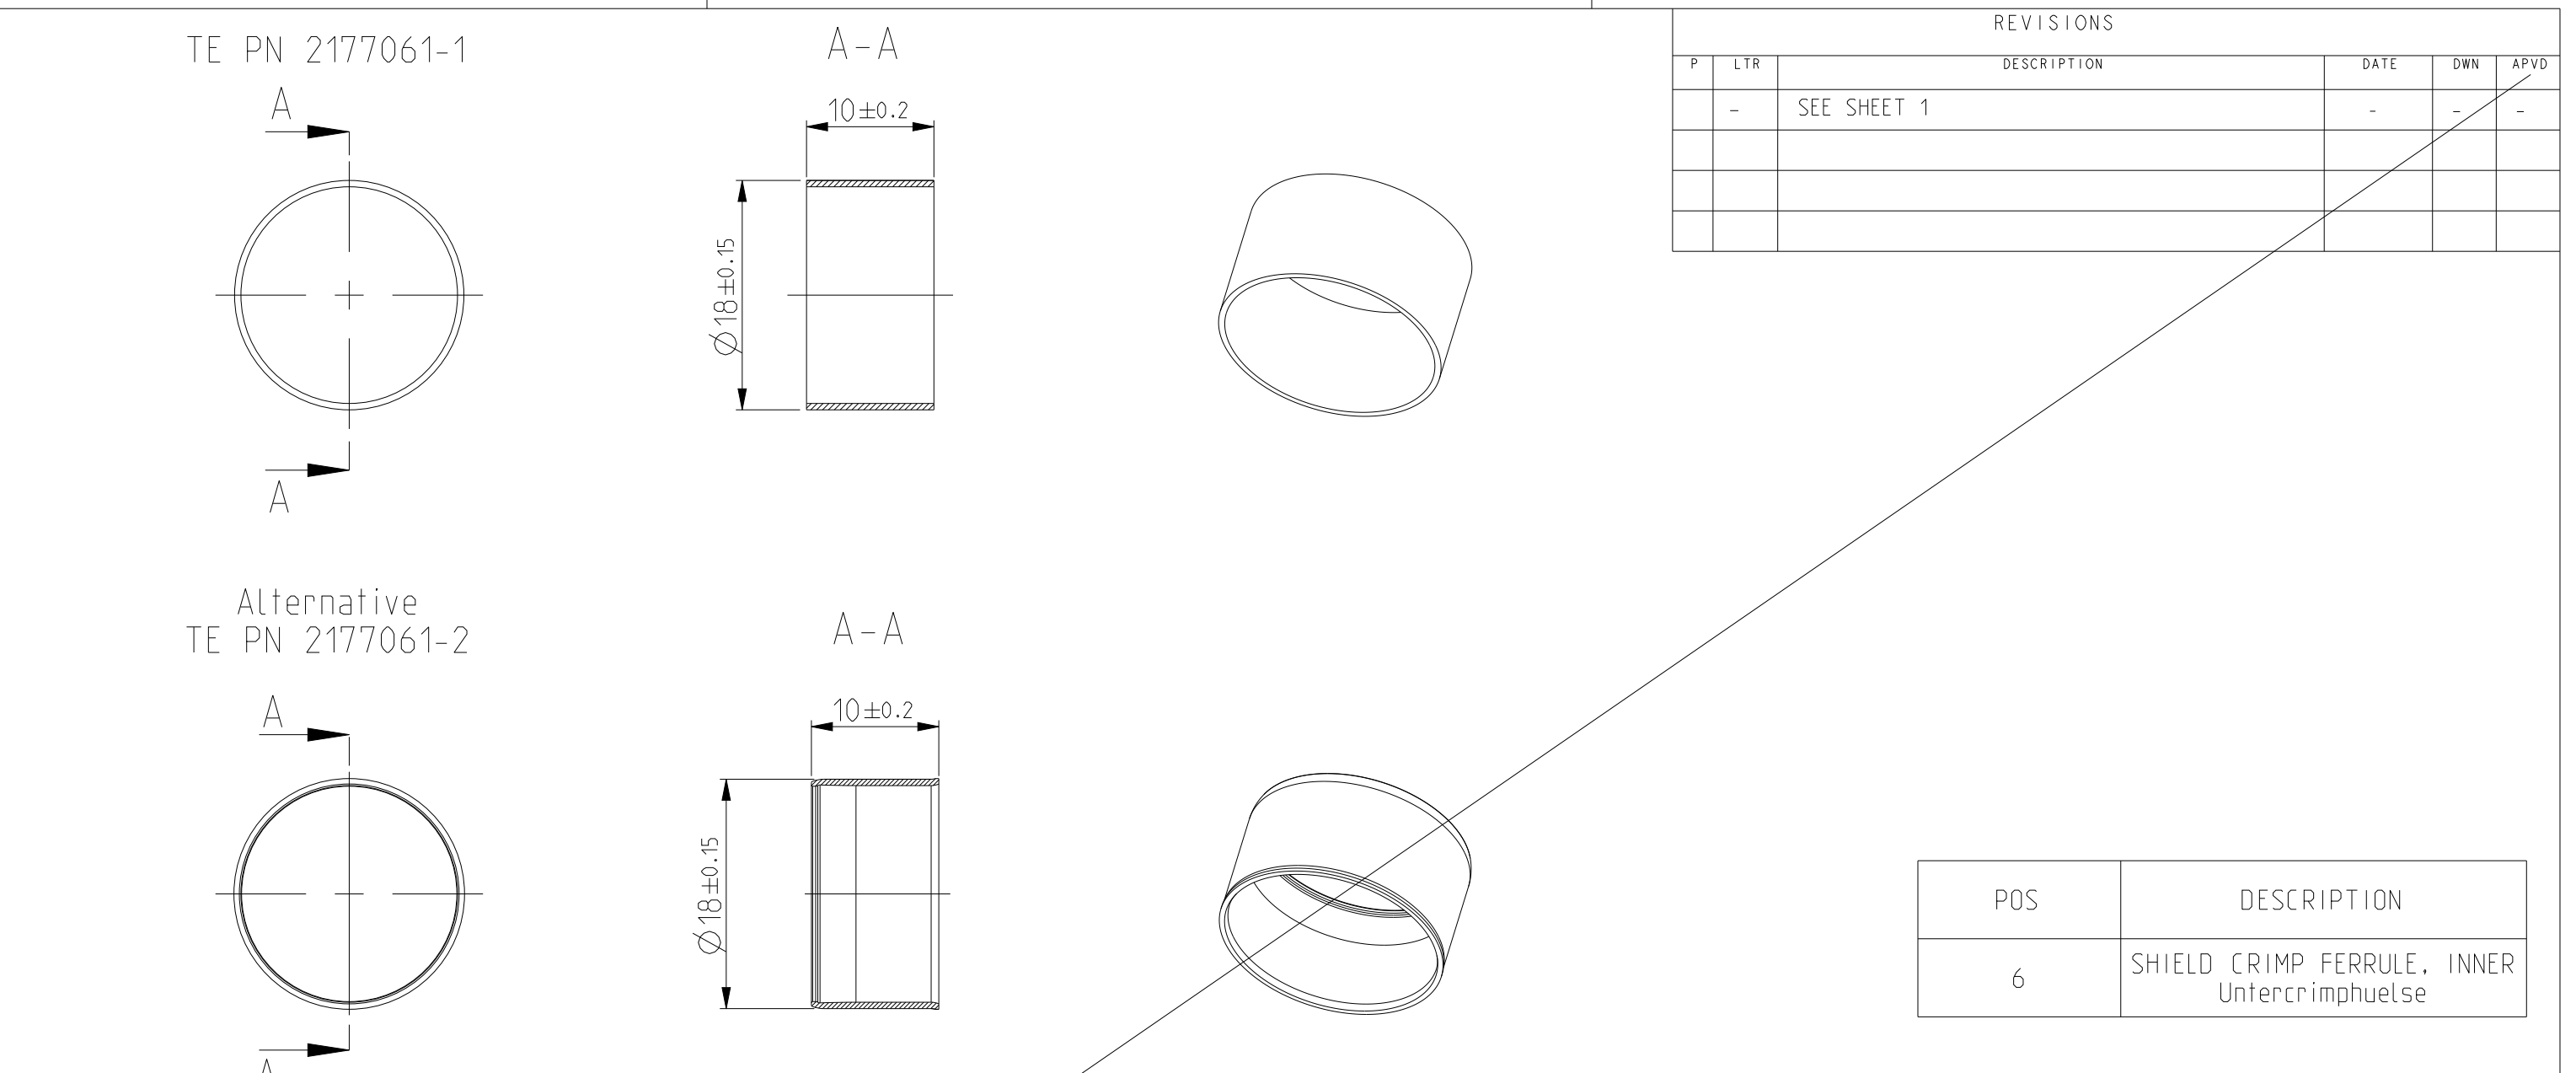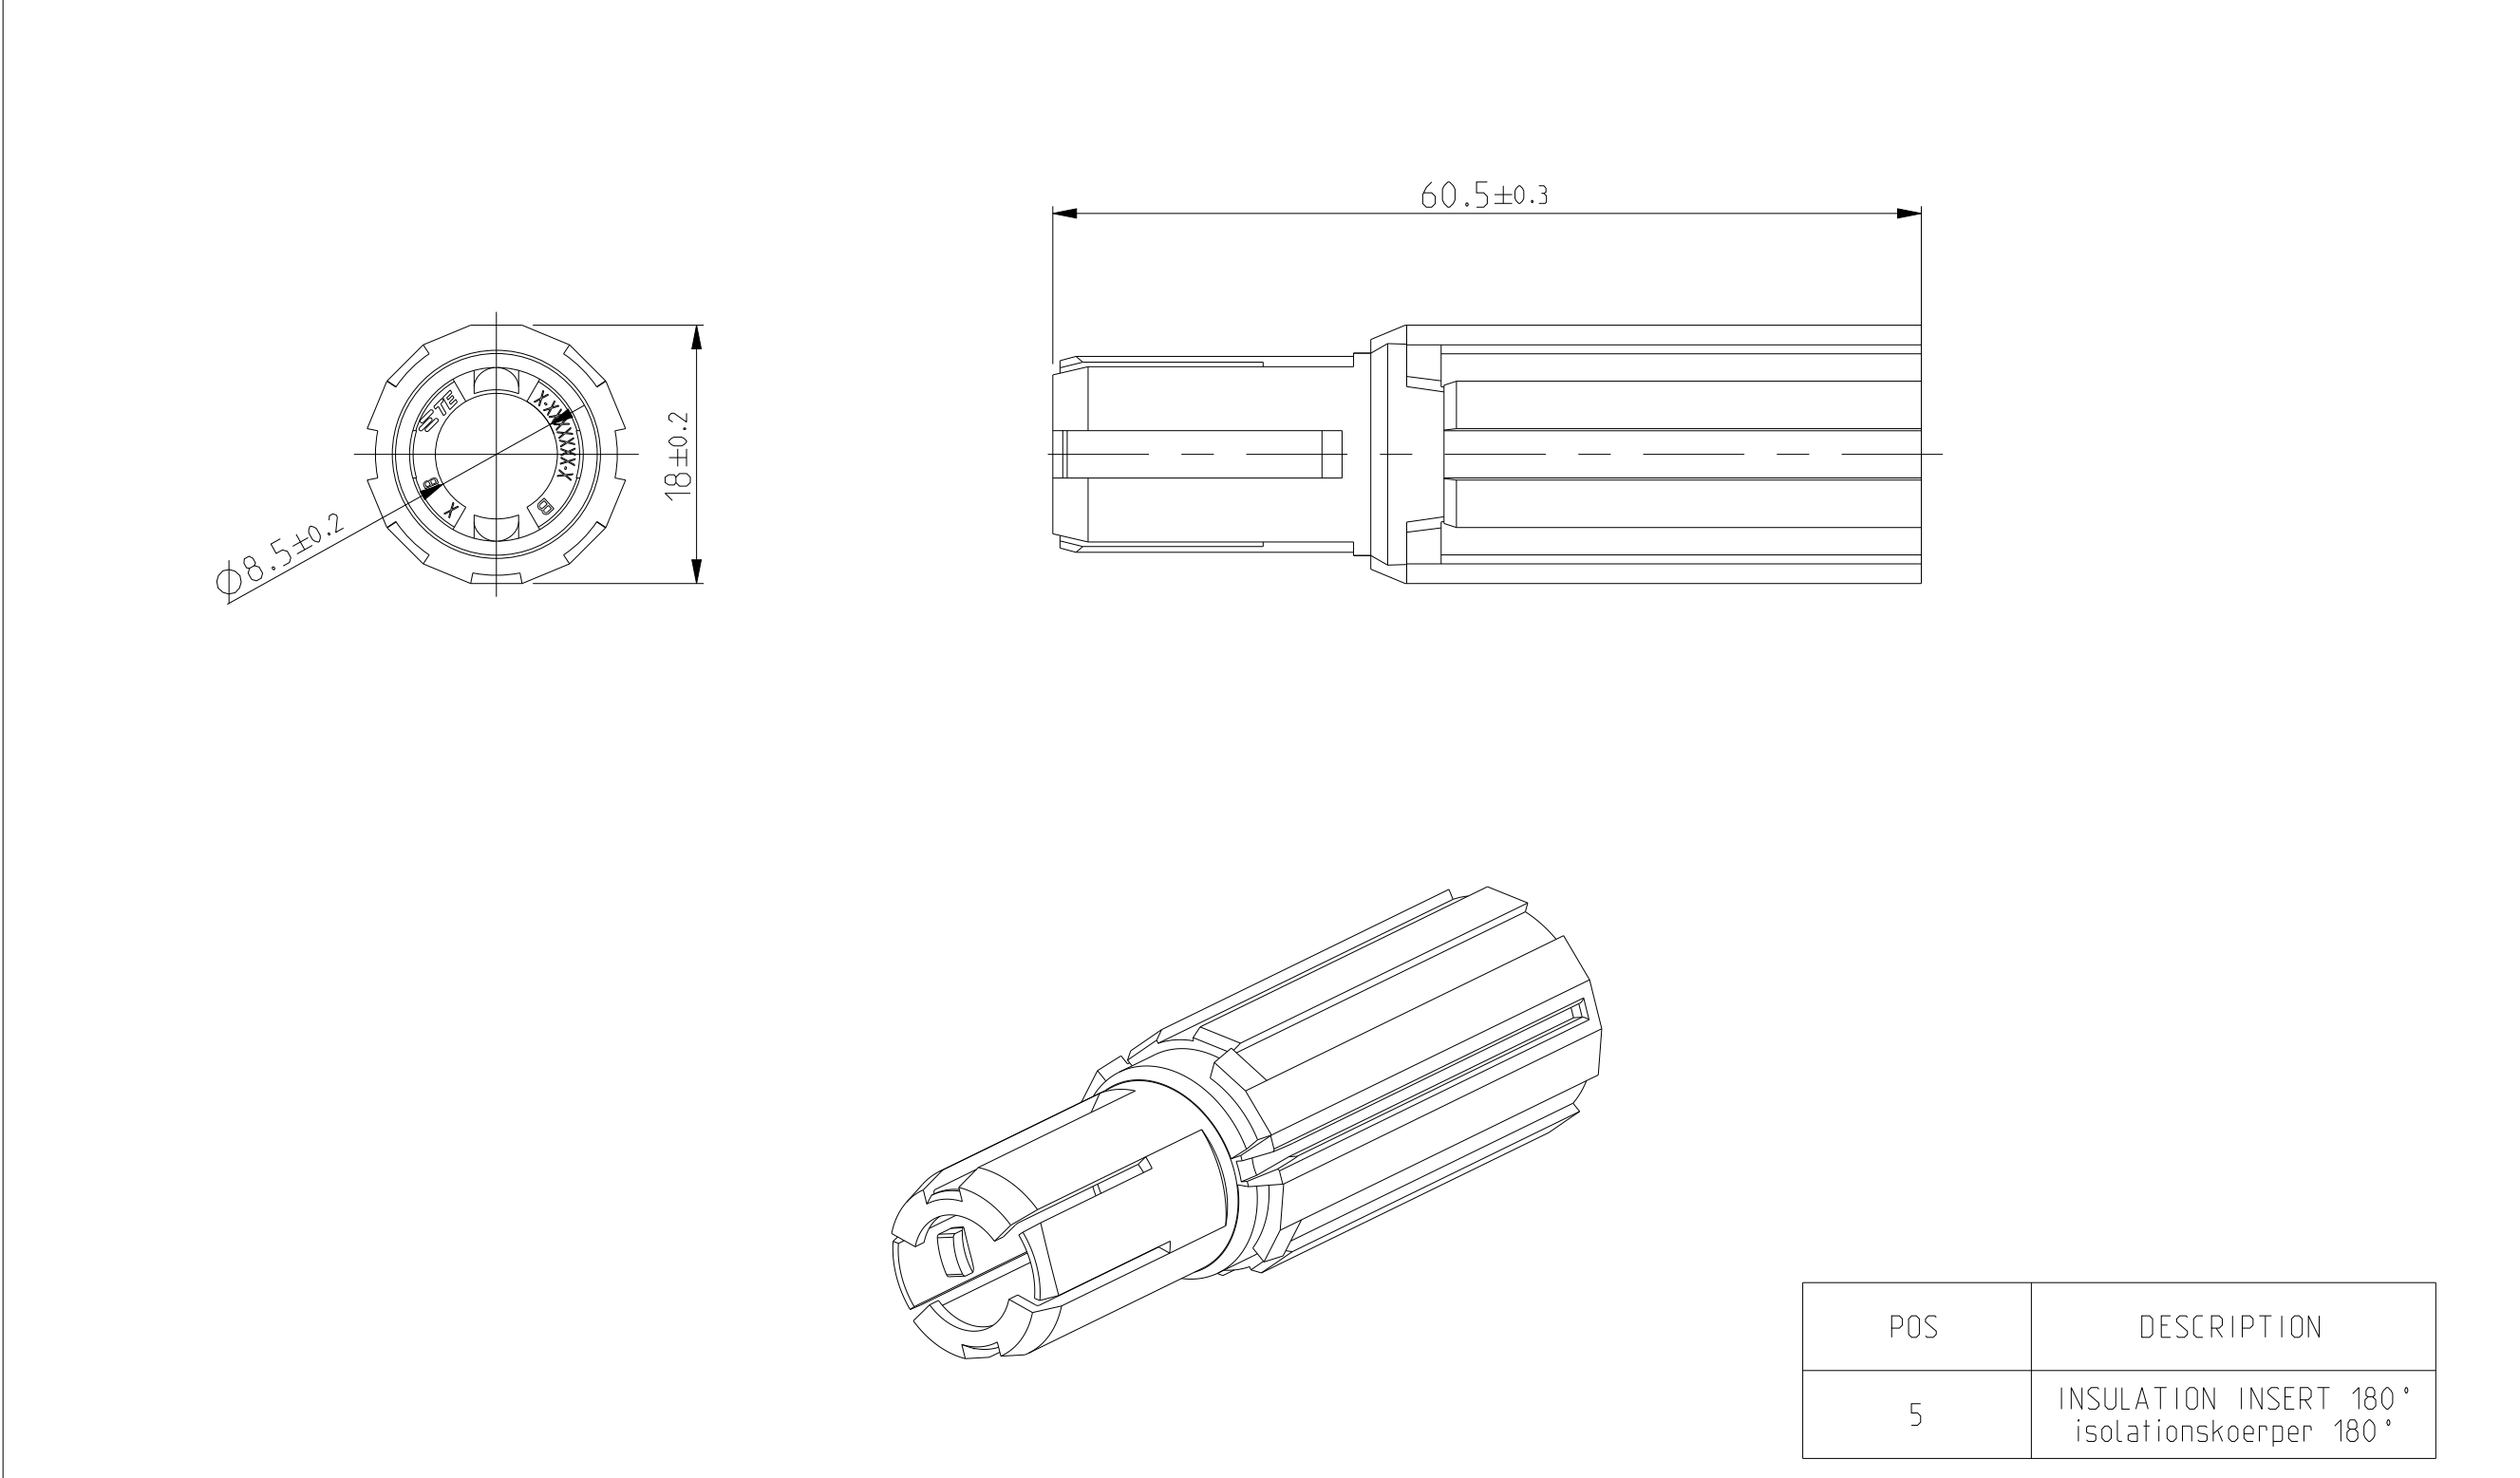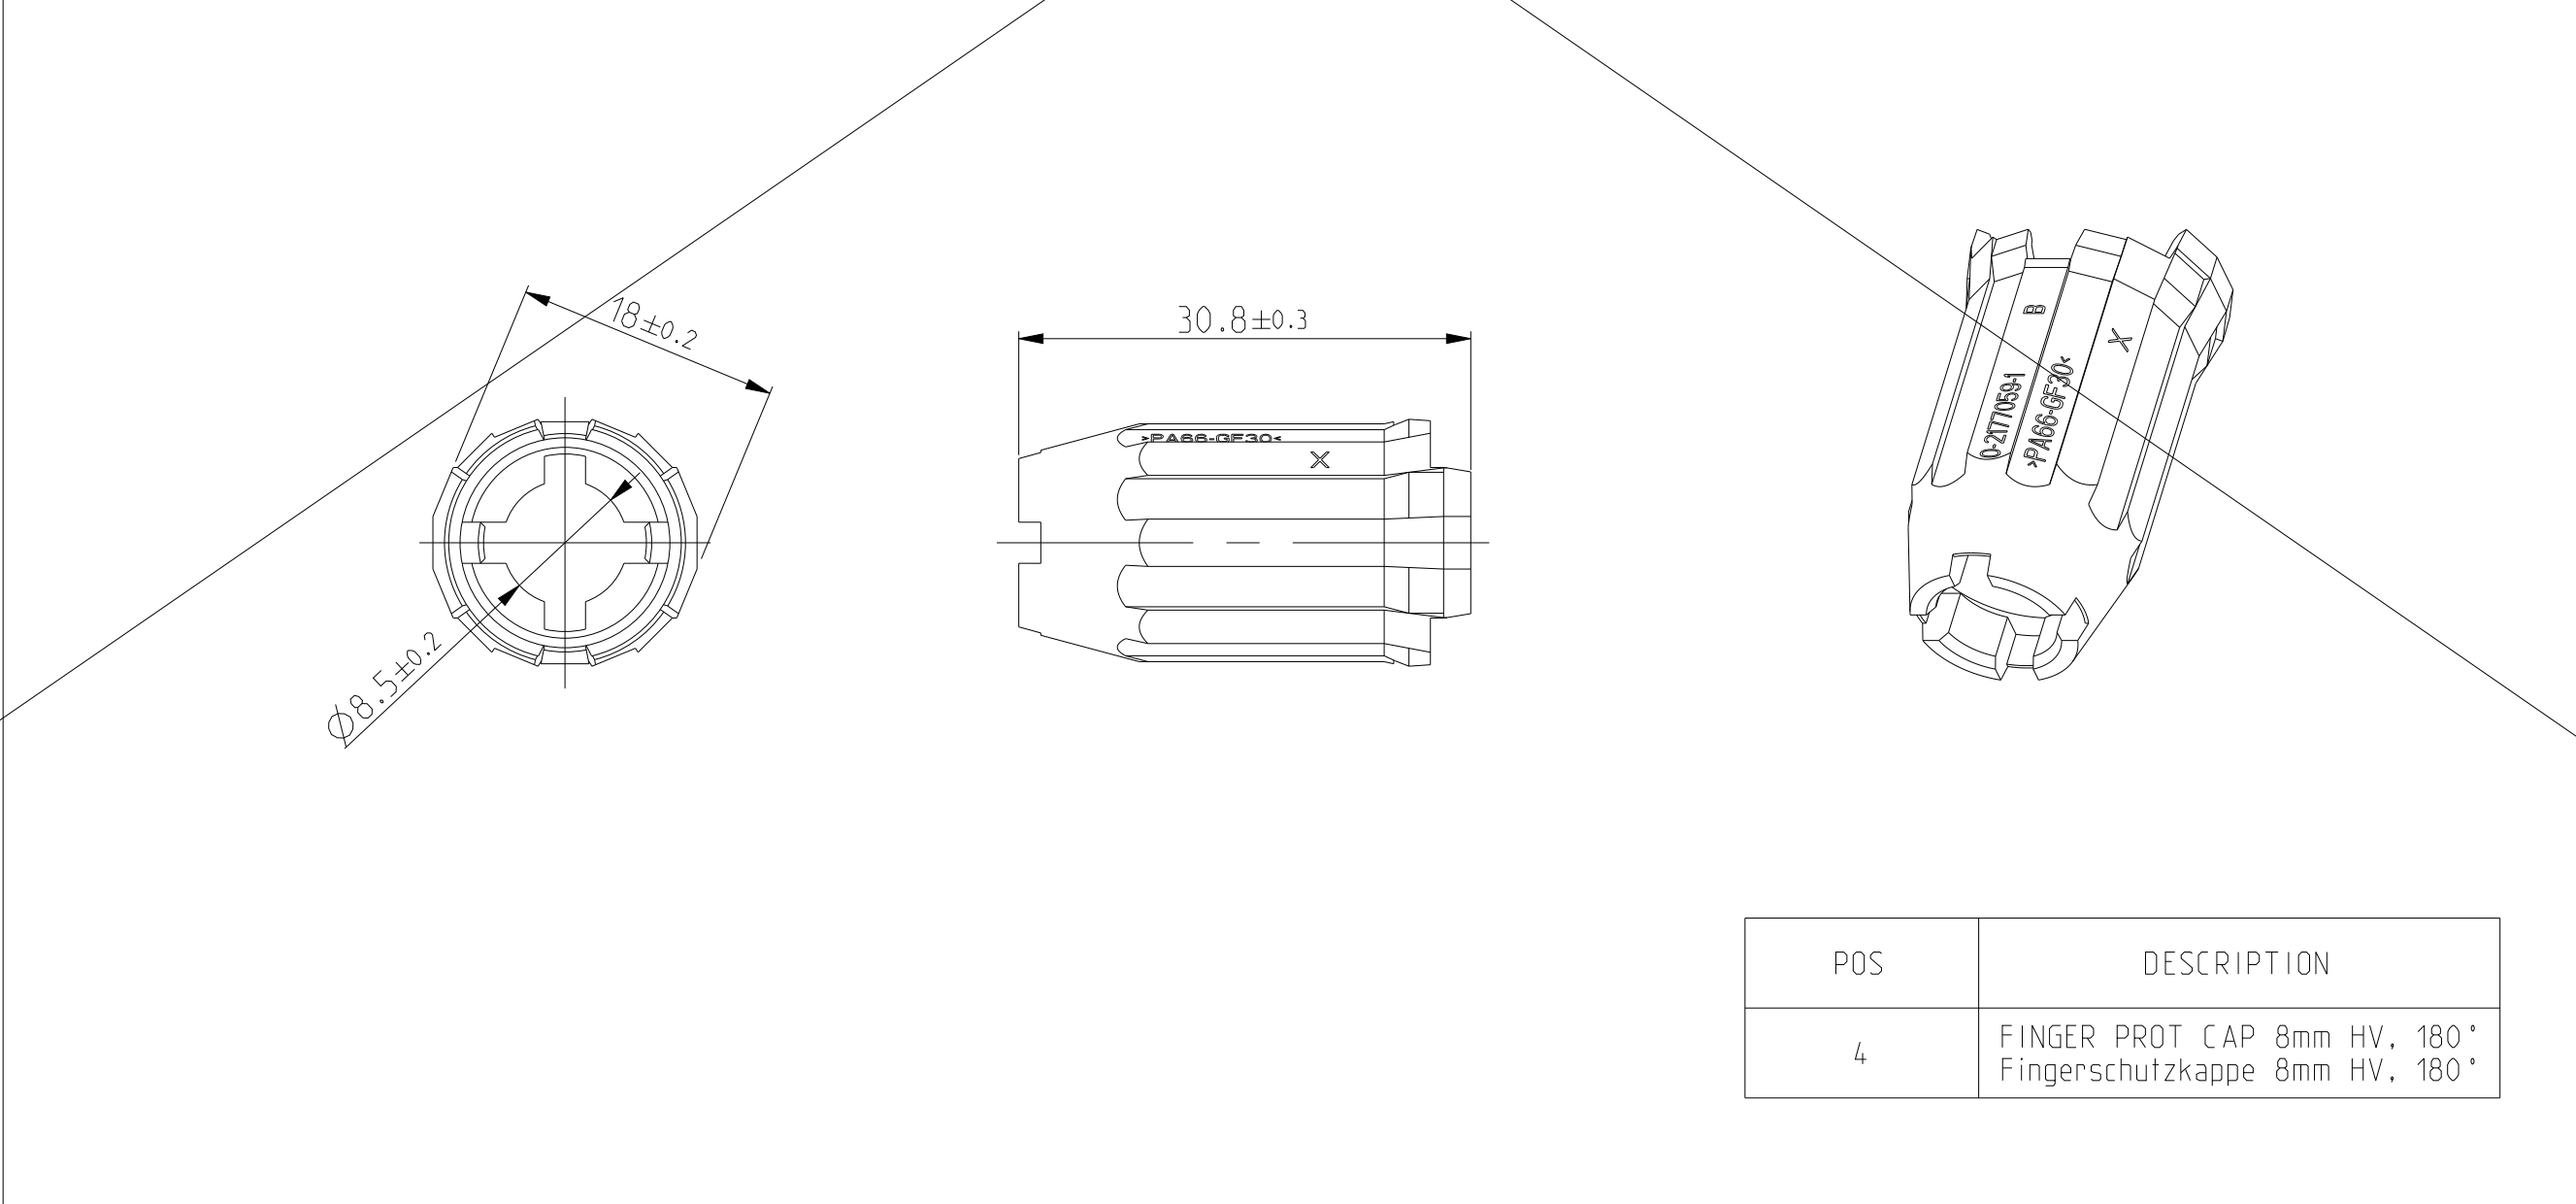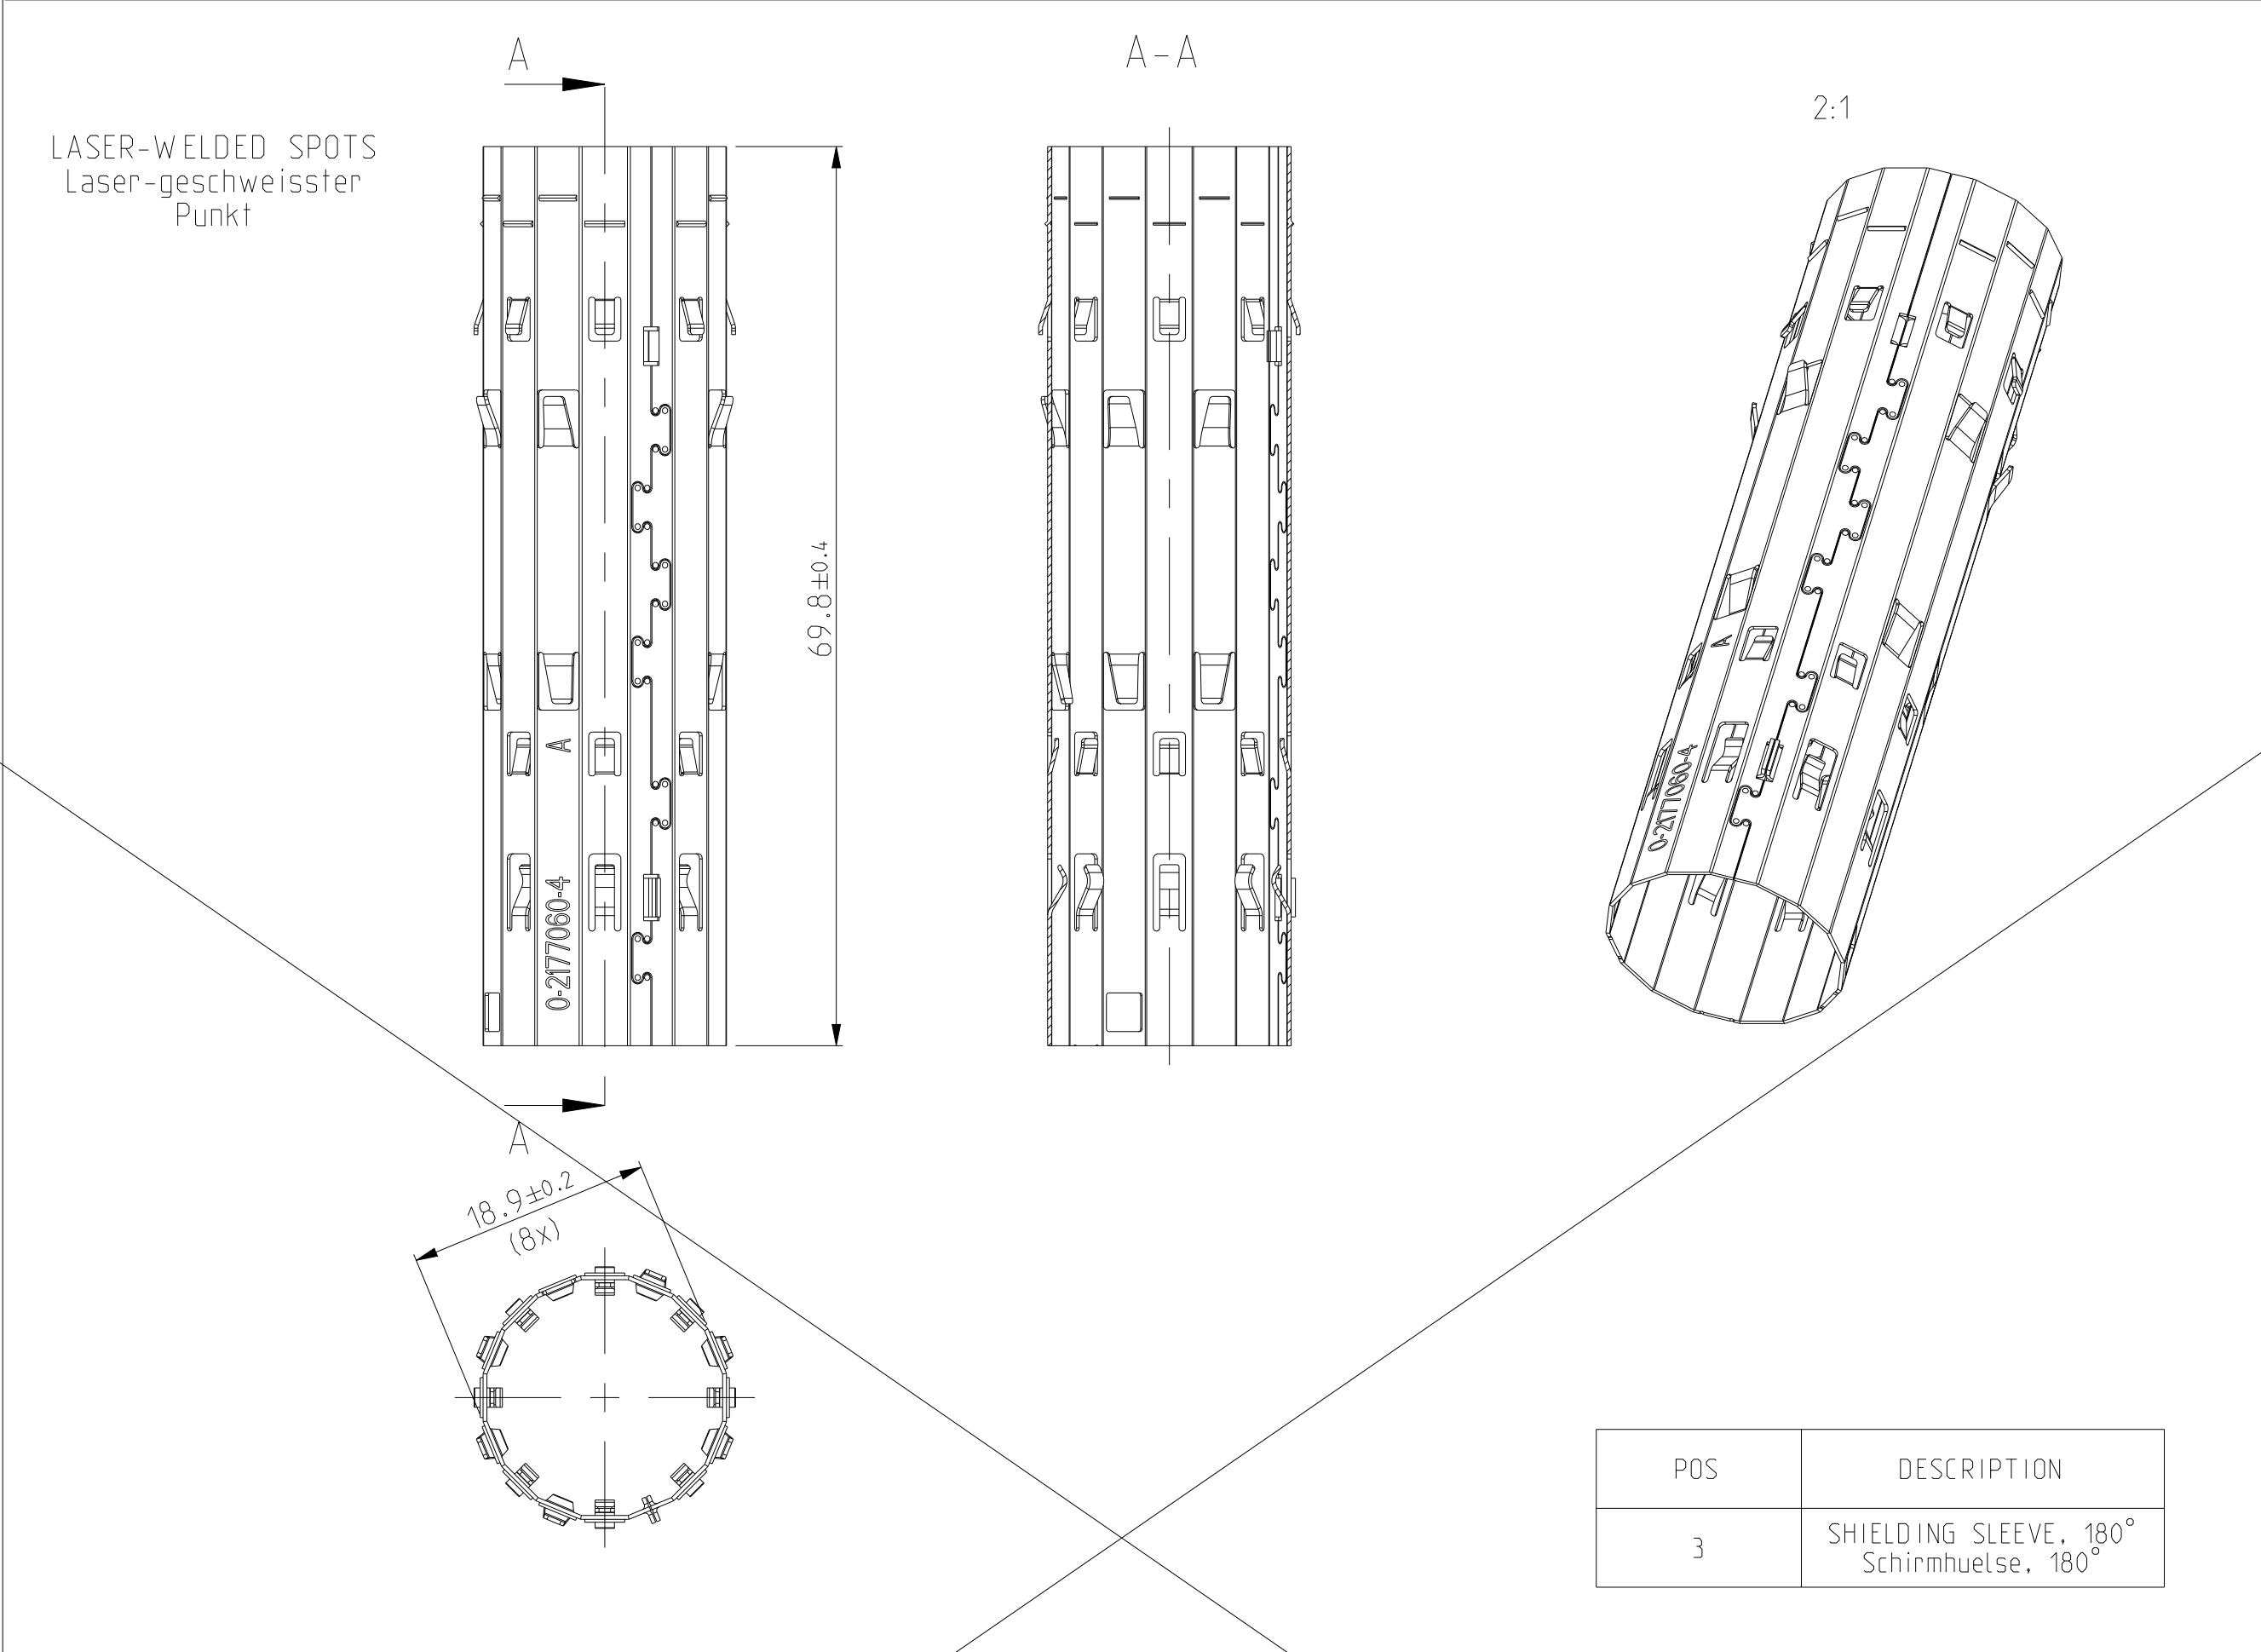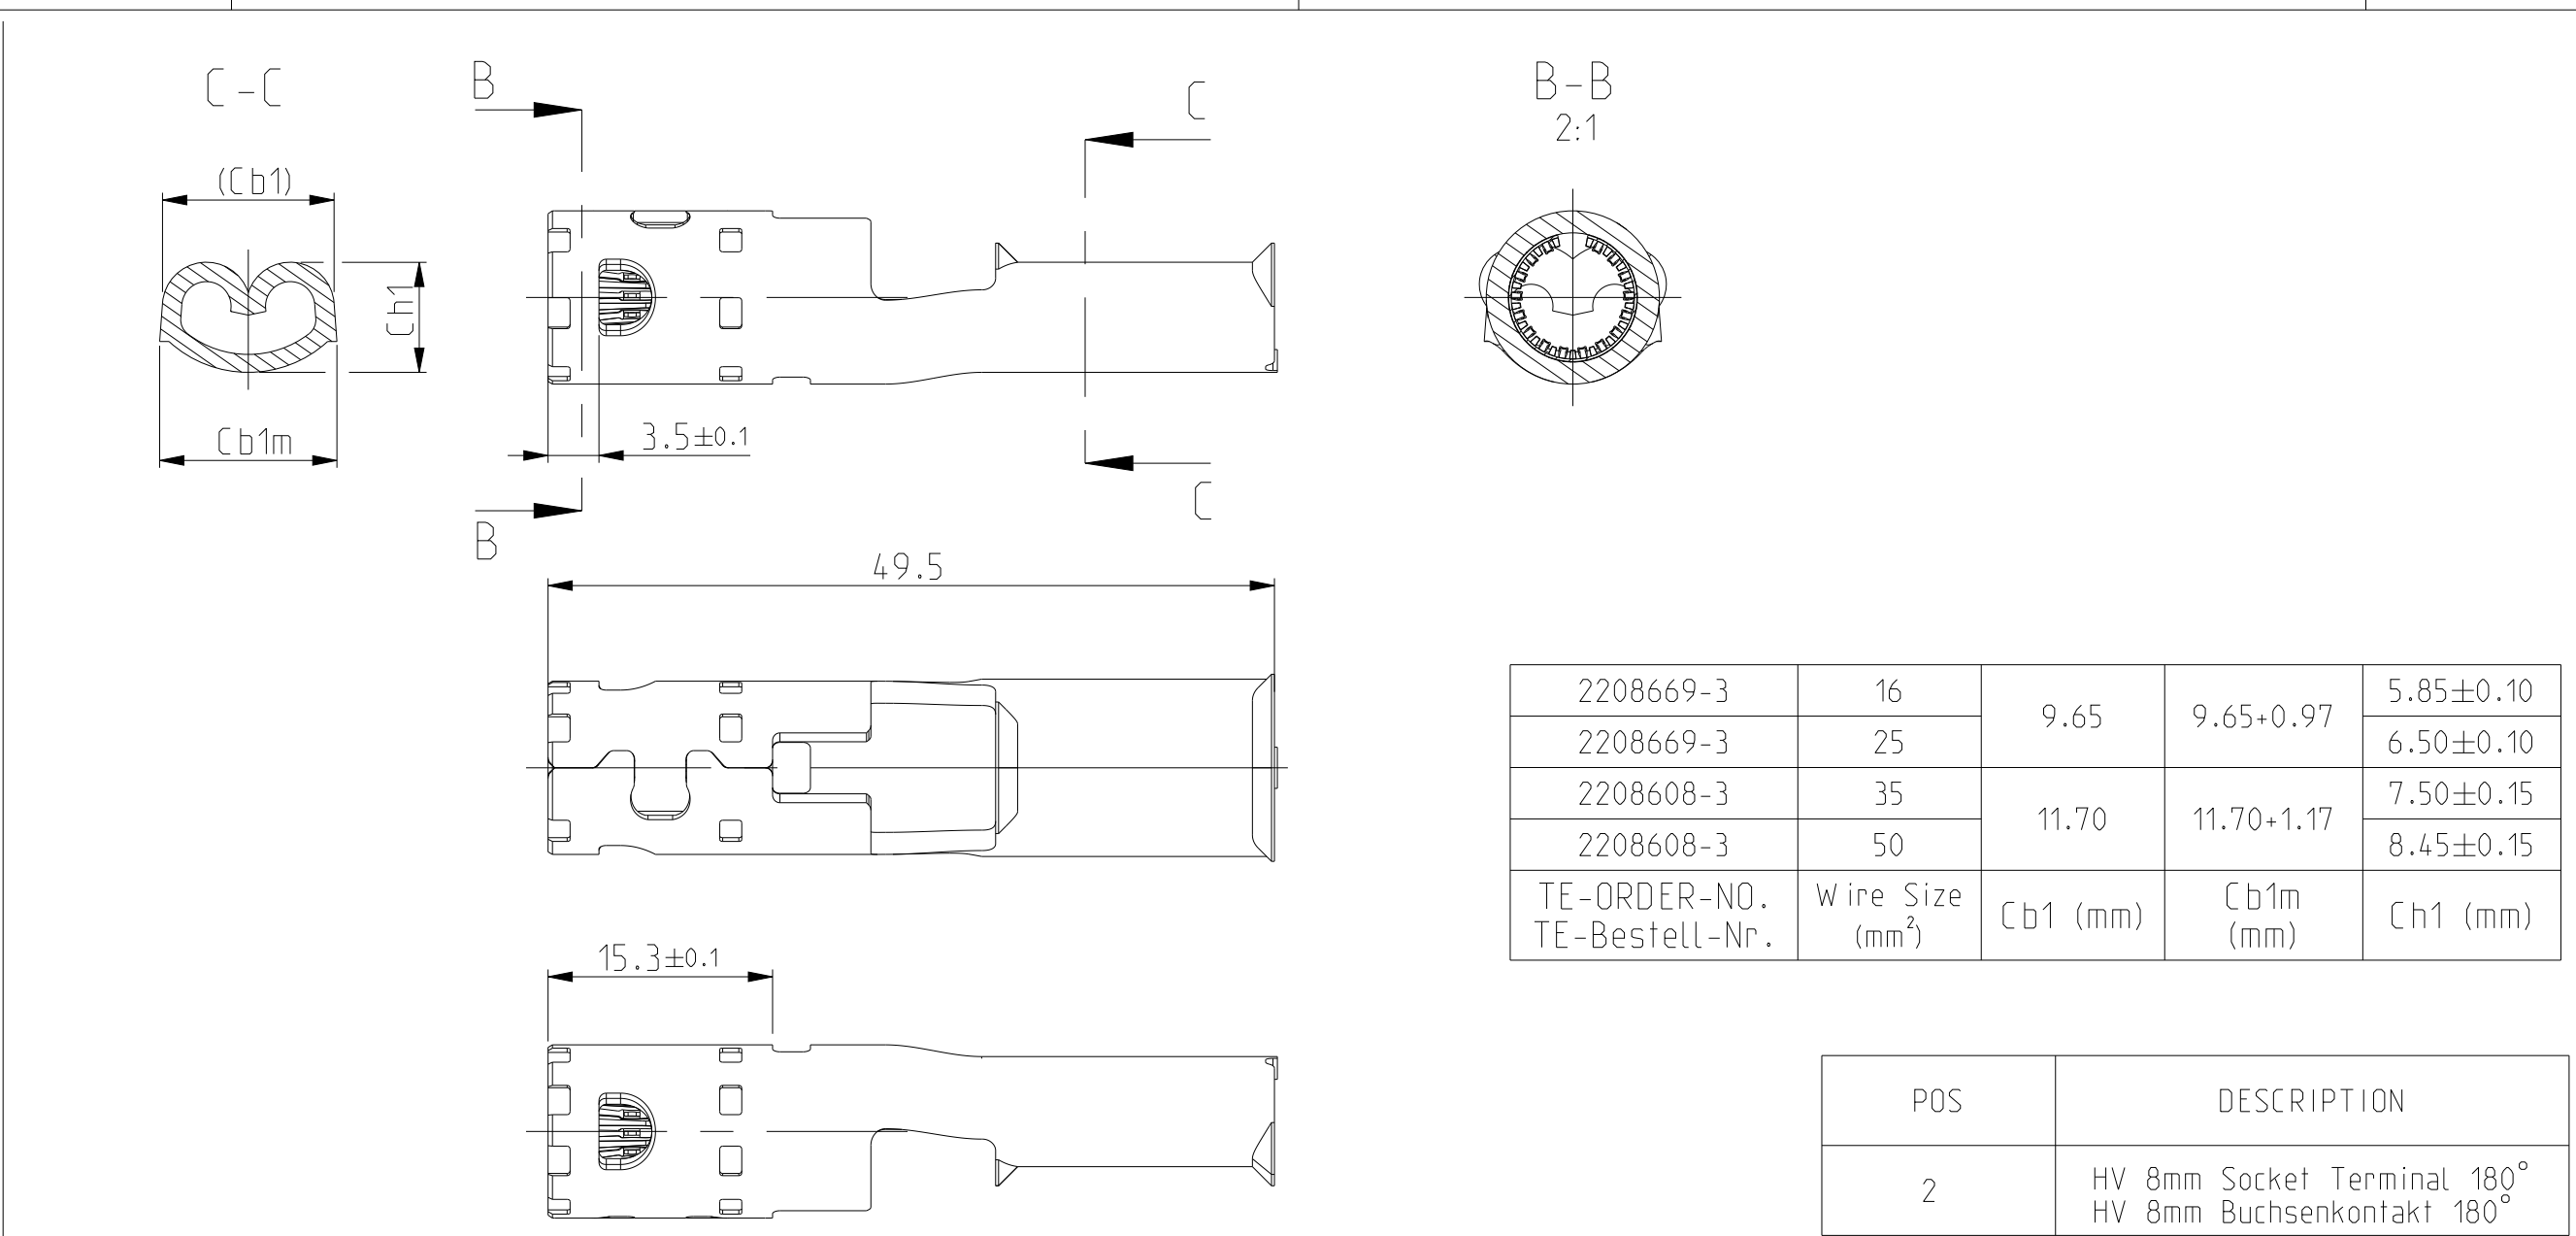

REVISIONS			
NO.	DATE	BY	APPV
1			

POS	DESCRIPTION
6	SHIELD CRIMP FERRULE, INNER Untercrimphülse

POS	DESCRIPTION
7	SHIELD CRIMP SLEEVE Schirm, Crimpbuchse

POS	DESCRIPTION
8	SINGLE WIRE SEAL, 8mm HV, 90° Kabeldichtung einzeln, 8mm HV, 90°

POS	DESCRIPTION
9	PROTEC. COVER 8mm HV, 90° Abdeckkappe 8mm HV, 90°

POS	DESCRIPTION
9	PROTEC. COVER 8mm HV, 90° Abdeckkappe 8mm HV, 90°

TOLERANZ ISO 8015  
TOLERIERUNG ISO 8015

DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT.  
DIMENSIONEN UND TOLERANZEN GEMÄSS: GPS ISO STANDARDS.

THIS DRAWING IS A CONTROLLED DOCUMENT.  
DIMENSIONING AND TOLERANCING PER GPS ISO STANDARDS.

DATE: 19DEC2014  
DRAWN: J. Toboldt  
CHECKED: H. D. Yu  
APPROVED: A. Kellner  
PRODUCT SPEC: 19DEC2014  
APPLICATION SPEC: VERBODEN TOEGANG  
MATERIAL: SEE TABLE  
FINISH: SEE TABLE  
CUSTOMER DRAWING

SCALE: 1:1  
SHEET: 6  
OF: 6

TE Connectivity

2POS 8mm HV KIT, 390DEG, SEALED  
2pol 8mm HV Kit, 180Grad, gedichtet  
OVERVIEW / Uebersicht, ASSY

00779 ©=2177052