
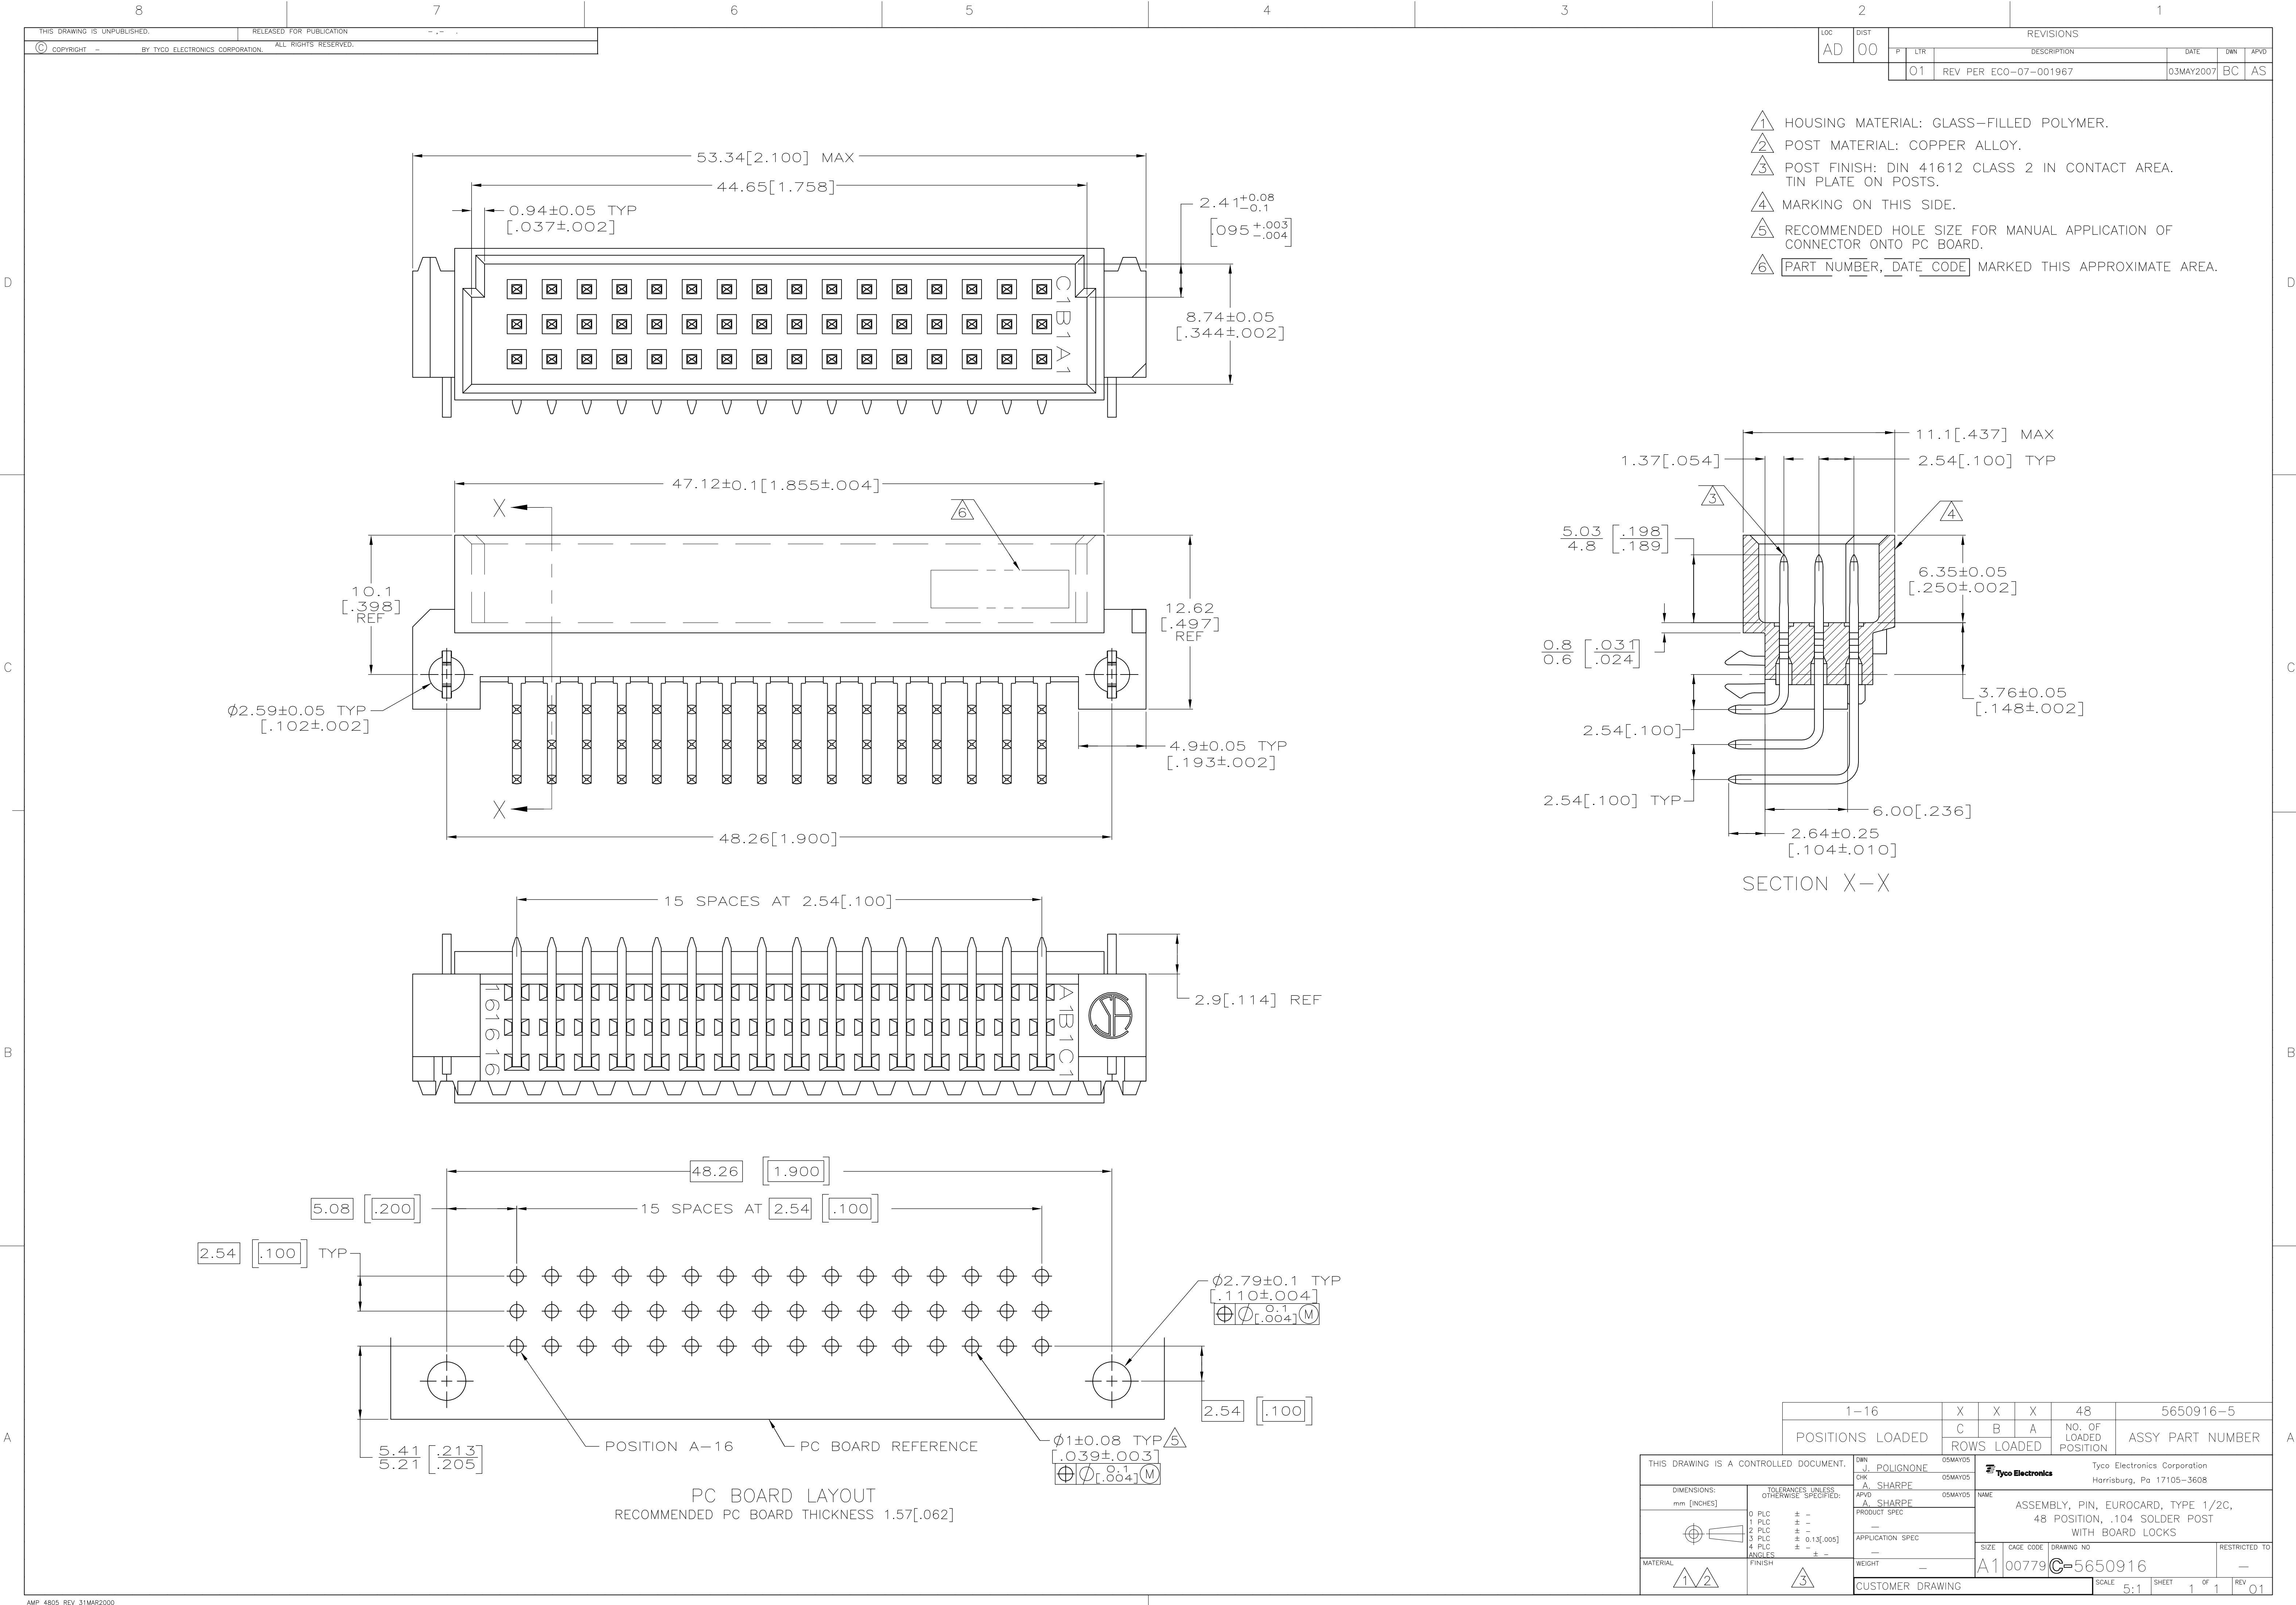




- 1 HOUSING MATERIAL: GLASS-FILLED POLYMER.
- 2 POST MATERIAL: COPPER ALLOY.
- 3 POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- 4 MARKING ON THIS SIDE.
- 5 RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- 6 [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.

SECTION X-X

PC BOARD LAYOUT
RECOMMENDED PC BOARD THICKNESS 1.57[.062]

		1-16		X	X	X	48	5650916-5	
		POSITIONS LOADED		C	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER	
				ROWS LOADED					
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN J. POLIGNONE	OSMAYOS		Tyco Electronics Corporation Harrisburg, Pa 17105-3608		
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK A. SHARPE	OSMAYOS		NAME		
				APVD A. SHARPE	OSMAYOS		ASSEMBLY, PIN, EUROCARD, TYPE 1/2C, 48 POSITION, .104 SOLDER POST WITH BOARD LOCKS		
		0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± 0.13[.005] 4 PLC ± —		PRODUCT SPEC — APPLICATION SPEC —		SIZE		CAGE CODE	DRAWING NO
MATERIAL		FINISH		WEIGHT —		A100779		C=5650916	
				CUSTOMER DRAWING		SCALE 5:1		SHEET 1 of 1	REV 0