



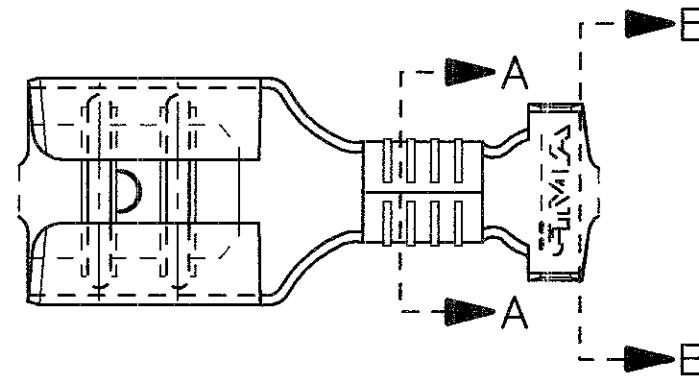

- 1) PER LE VERSIONI IN NASTRO
VEDERE DISEGNO 160432.
(FOR STRIP VERSION SEE DWG. 160432).
- 2) CONFEZIONATO IN ACCORDO ALLA
SPECIFICA AMP 107-20201.
(PACKAGED ACCORDING TO AMP SPEC. 107-20201).


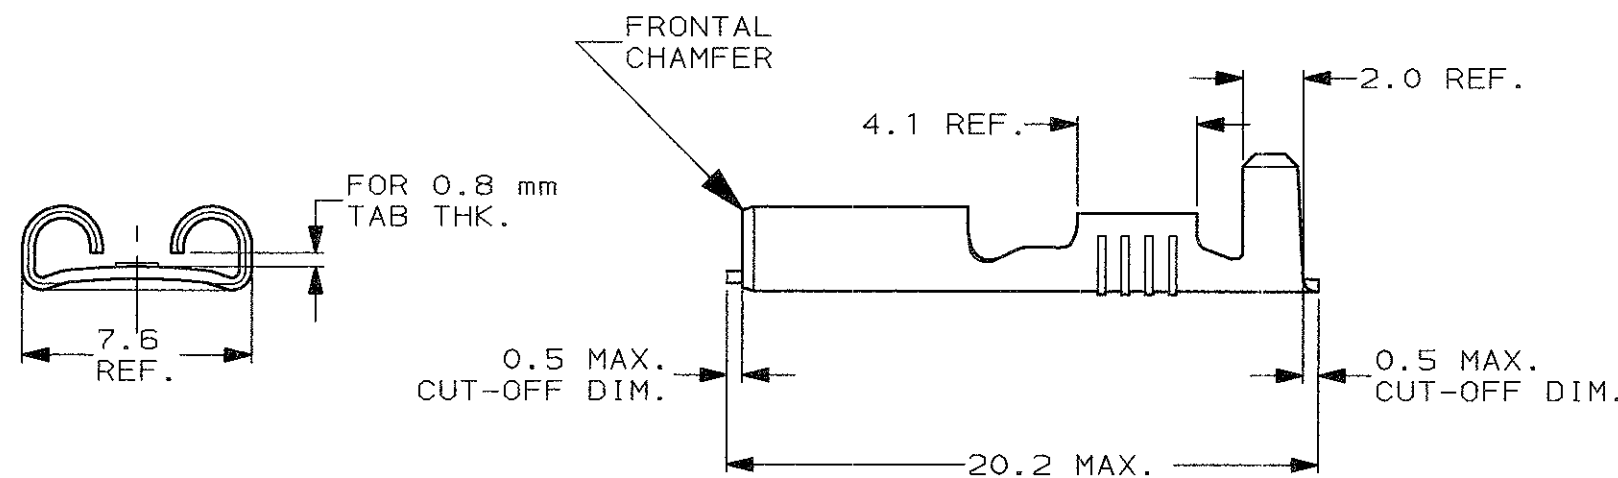


SEZIONE A-A
(SECTION A-A)

SEZIONE B-B
(SECTION B-B)

INSULATION BARREL
NO PREFORMING REQUIRED

HMR

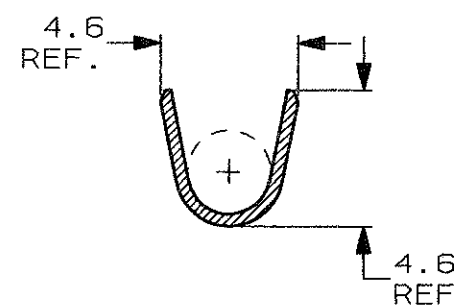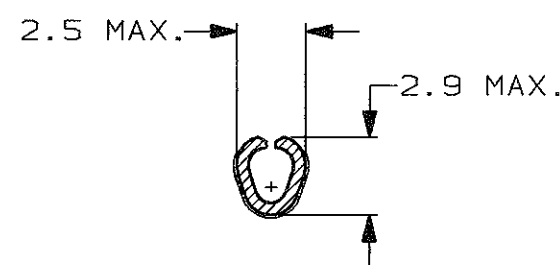

STAGNATO (TIN PLATED)	BRONZO FOS. (PHOS. BRONZE)	5-160506-8	J
NUDO (UNPLATED)	BRONZO FOS. (PHOS. BRONZE)	5-160506-7	J
ARGENTATO (SILVER PLATED)	OTTONE (BRASS)	5-160506-5	J
PRE NICHELATO (PRE-NICKEL PL.)	ACCIAIO (STEEL)	5-160506-3	J
STAGNATO (TIN PLATED)	OTTONE (BRASS)	5-160506-2	J
NUDO (UNPLATED)	OTTONE (BRASS)	5-160506-1	J
FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	NUMERO (PART NUMBER)	REV

CUSTOMER DWG.
FOR REFERENCE ONLY

DISEGNO PER CLIENTE
SOLO PER RIFERIMENTO

THIS DRAWING IS UNPUBLISHED RELEASE FOR PUBLICATION

TOLLERANZE: SE NON
DIVERSAMENTE SPECIFICATO
(TOLERANCES: UNLESS
OTHERWISE SPECIFIED)

DIAM. ISOLANTE
(INS. DIA. RANGE)

RANGO FILO
(WIRE RANGE)

SCALA
(SCALE)

± 0.3

TE Connectivity

DIS. H. YAALI
(DR.) 17 OCT 2000

DESCRIZIONE
(DESCRIPTION) FASTON® Connector,
.250" sr. REC. CONTACT
(LOOSE PIECE VERSION)

CONT. C. TARTARI
(CHK) 17 OCT 2000

LOC. SIZE NUMERO
(DWG NO)

REV.

FOGLIO
(SHEET)

J1

REVISED PER ECO-11-005294

RK

09APR
11

APP.

(APP.)

I A3

C-160506

J1

1 OF 1