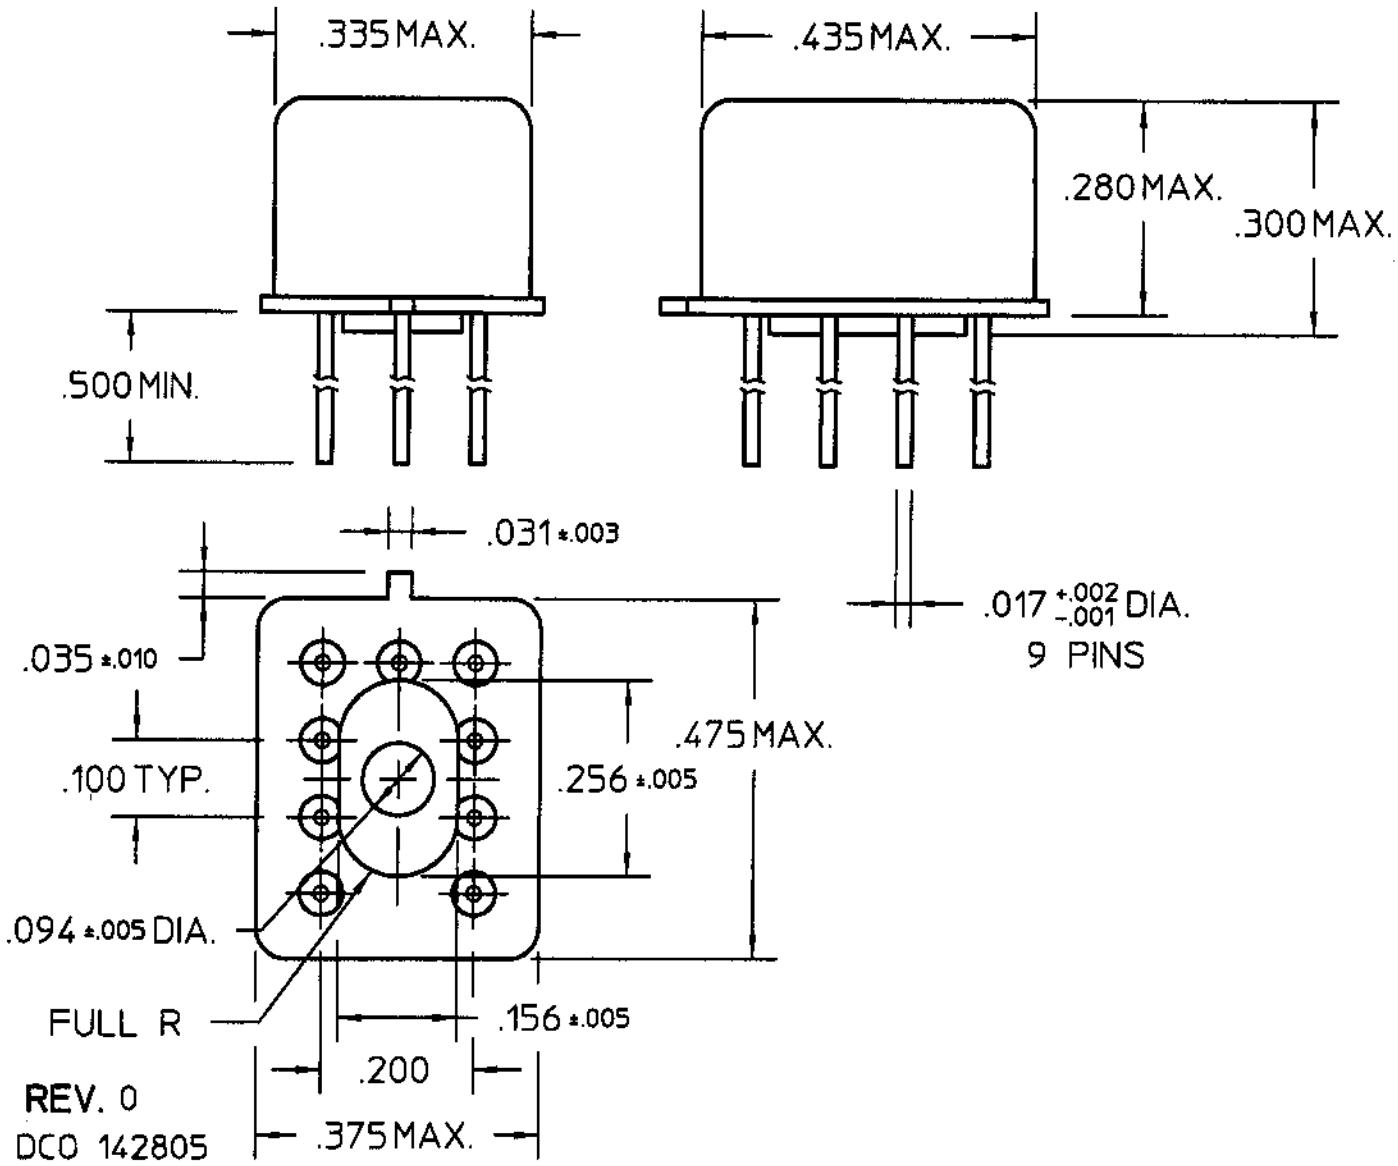

COIL: @ 25°C

RESISTANCE 39 OHMS ± 10%

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 2.9 VDC

MUST RELEASE 1.4 VDC MAX, 0.23 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.5 MS MAX.
RELEASE TIME 4.0 MS MAX.
CONTACT STABILIZATION TIME 2.0 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 3/9/01 CK. 3/9/01

CII Technologies™
advanced control electronic solutions

CUST. QPL
CUST. NO. M28776/6-007M REV.

"JMGAT" RELAY

JMGAT-5MW

F-718 REV 3