

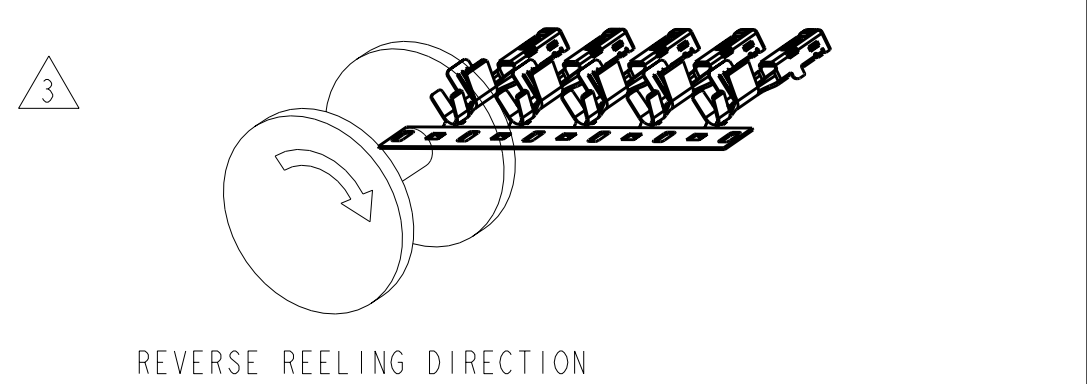


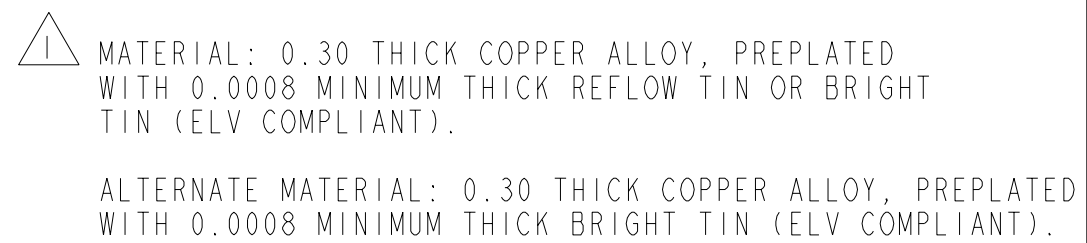

4. QUALIFICATION OF THE CRIMP APPLICATION TOOLING SHALL BE CONTROLLED BY THE REQUIREMENTS ESTABLISHED UNDER USCAR 21.
5. LOOSE END SPLICING TO BE USED.

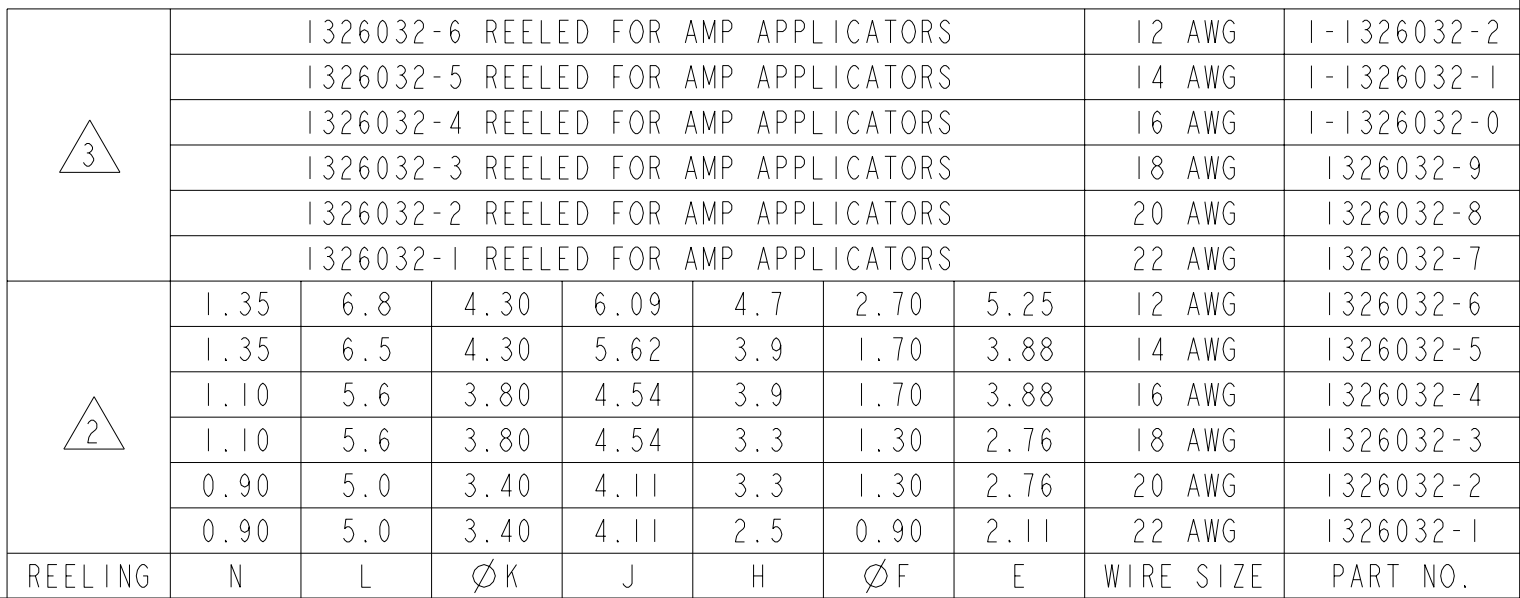

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. STRAUSSER 28APR99 CHK D. BROWN 28APR99 APP'D D. BROWN 28APR99		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± 2 PLC ±0.3 2 PLC ±0.10 2 PLC ± 2 PLC ± ANGLES ±°		PRODUCT SPEC SAE/J1587-2 8/97 APPLICATION SPEC 114-13013	
MATERIAL		FINISH		SIZE CAGE CODE DRAWING NO A1 00779 C=1326032	
				RESTRICTED TO -	
CUSTOMER DRAWING		WEIGHT		SCALE 10: SHEET 1 OF 1 REV E	