



P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED AND REDRAWN PER E.O. D0426	130214		AR
	E	REVISED PER ECN-25-323002	250508	AB	MP

D

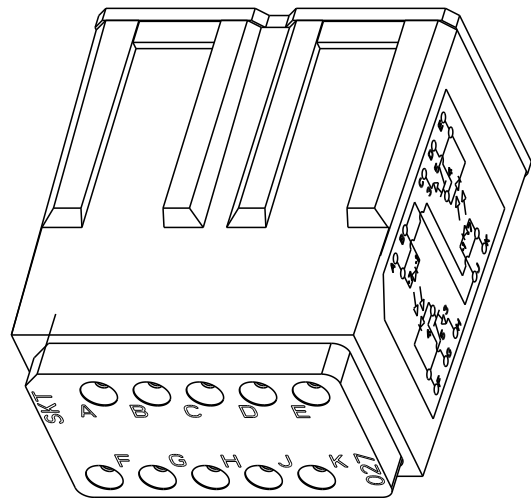

SCALE 2:1

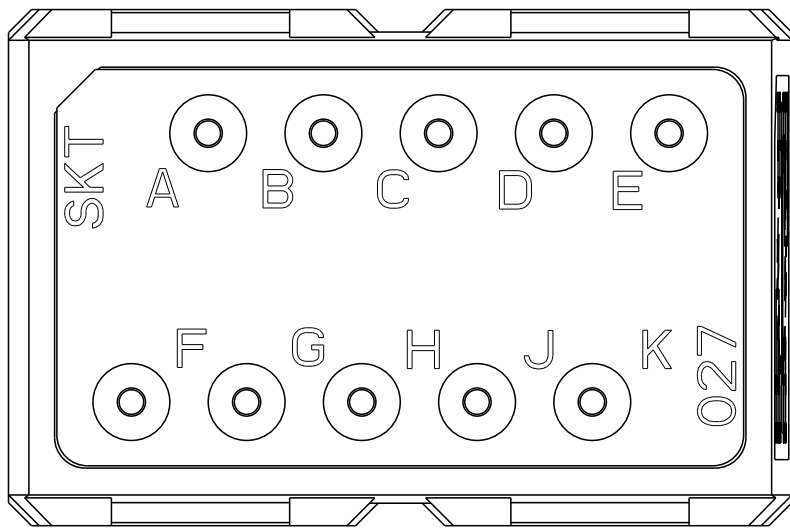

C



11. MODULE PACKAGED IN MIL-PRF-81705 POLY BAG.
10. ESD MODEL CLASSIFICATION (CHARGE DEVICE MDEL): C1.
9. INTERNAL COMPONENTS: (2) MICROPAC MODEL 66223-108 ISOCUBE.
8. TEMPERATURE RANGE: -67°F TO 257°F (-55°C TO 125°C).
7. MATERIAL / FINISH:

HOUSING / THERMOPLASTIC

GROMMET / SILICONE ELASTOMER

PIN CONTACT/ COPPER ALLOY PLATED GOLD
6. REQUIRES CONTACT TOOL PART NUMBER M15570-20 (NOT SUPPLIED).
5. SEE ENVELOPE DRAWING CTJ-3X-XX FOR SUITABLE RAIL ASSEMBLY.
4. FOR CONTACT DATA, SEE ENVELOPE DRAWING NUMBER 1625-1-0000.
3. CTJ420E 027 CIRCUIT ARRANGEMENT
2. CIRCUIT IDENTIFICATION MARKED ON SIDE OF JUNCTION AS SHOWN.
1. DIMENSIONS ARE IN INCHES.

NOTES: UNLESS OTHERWISE SPECIFIED.

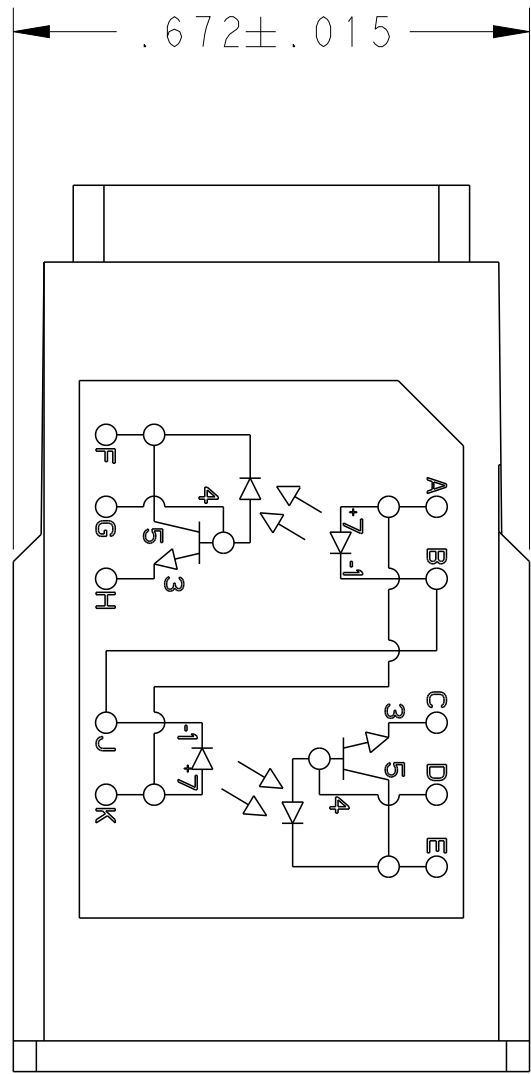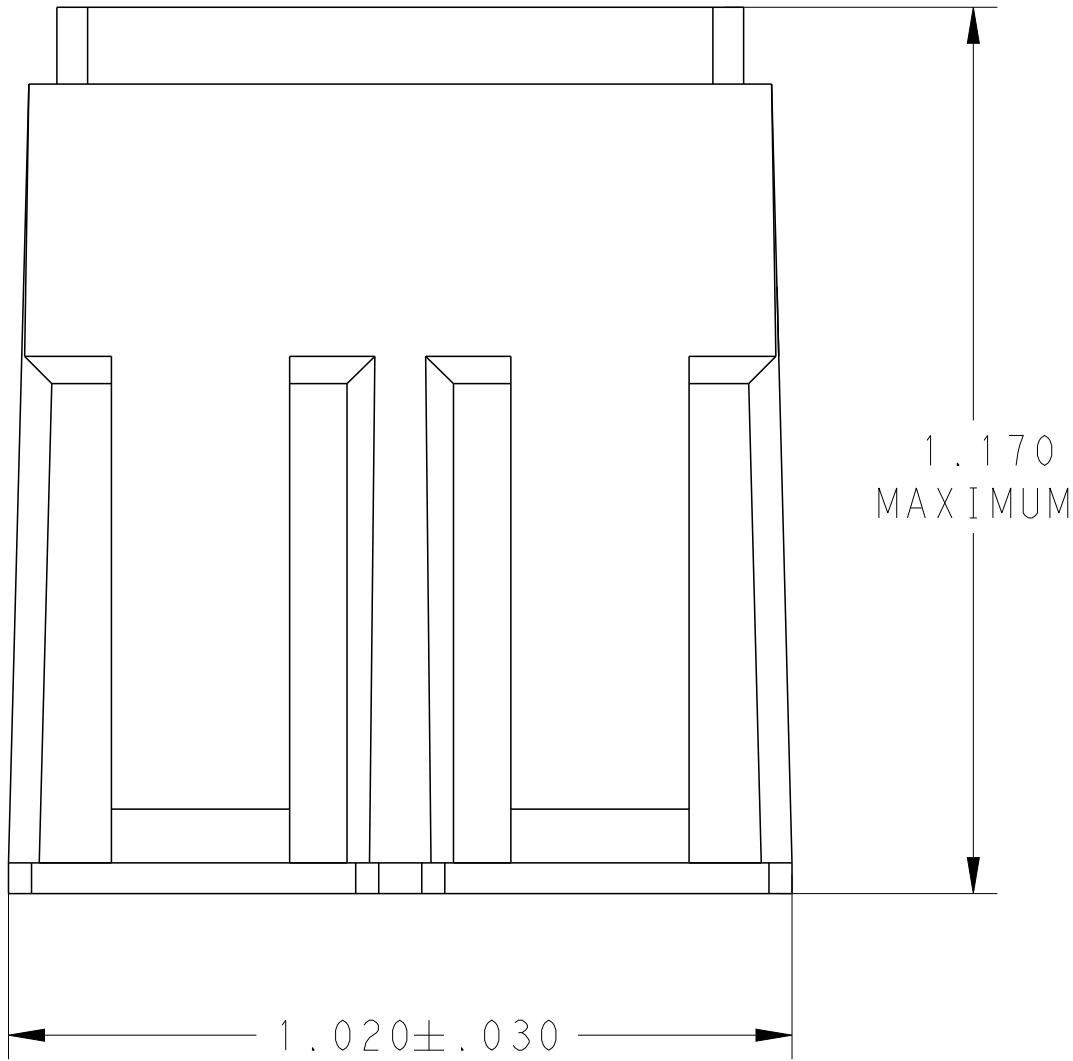

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. BALCAZAR CHK J. ROMERO APVD M. PACHECO	07MAY2025 07MAY2025 12MAY2025	TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME JUNCTION, ELECTRONIC COMPONENT 10 SIZE 20 CONTACTS, 027 ARRANGEMENT ASSEMBLY	
		0 PLC ± 1 PLC ±.1 2 PLC ±.01 3 PLC ±.001 4 PLC ±.0001 ANGLES ± FINISH		SIZE A2	RESTRICTED TO -
		MATERIAL -		CAGE CODE 111139	
SEE NOTE 7		WEIGHT -		DRAWING NO CTJ420E027	REV E
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1	