

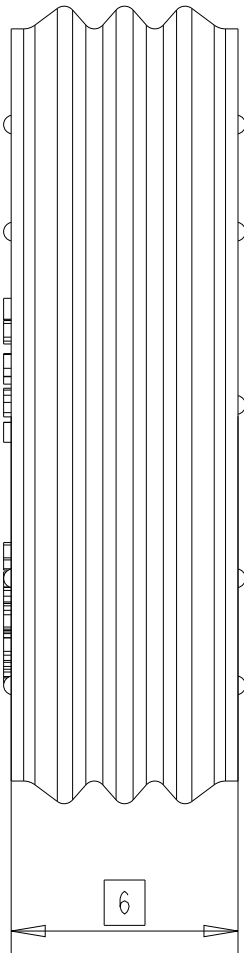


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	INITIAL RELEASE	16FEB2022	SS	KPB
	A2	DRAWING UPDATE AS PER SUPPLIER DRAWING	13JUN2022	SS	KPB

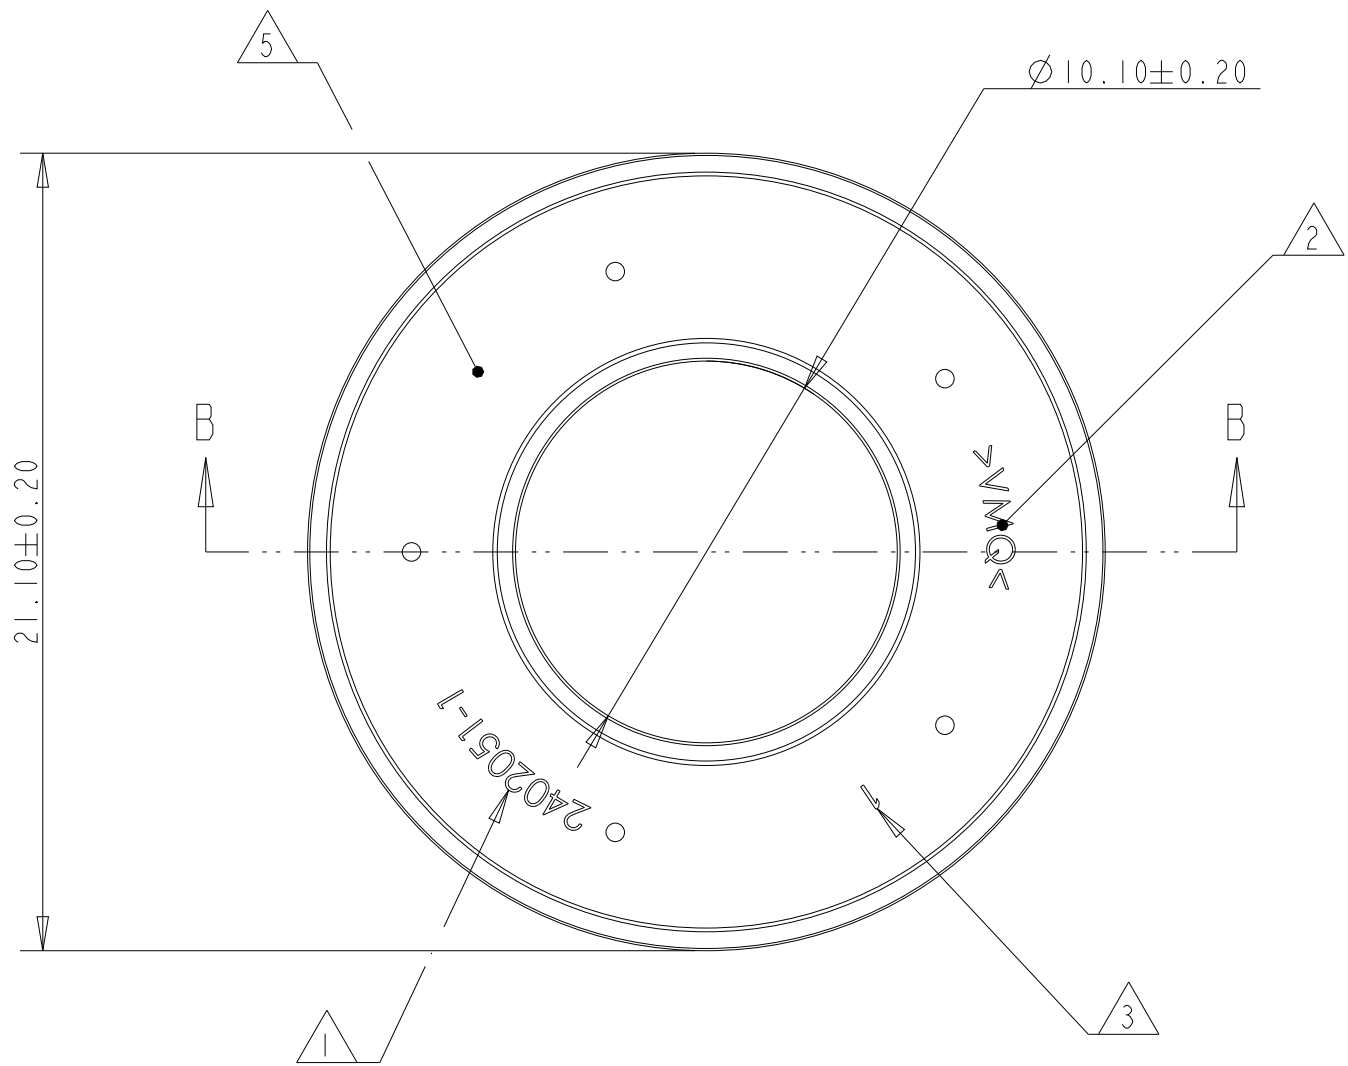


SECTION B-B

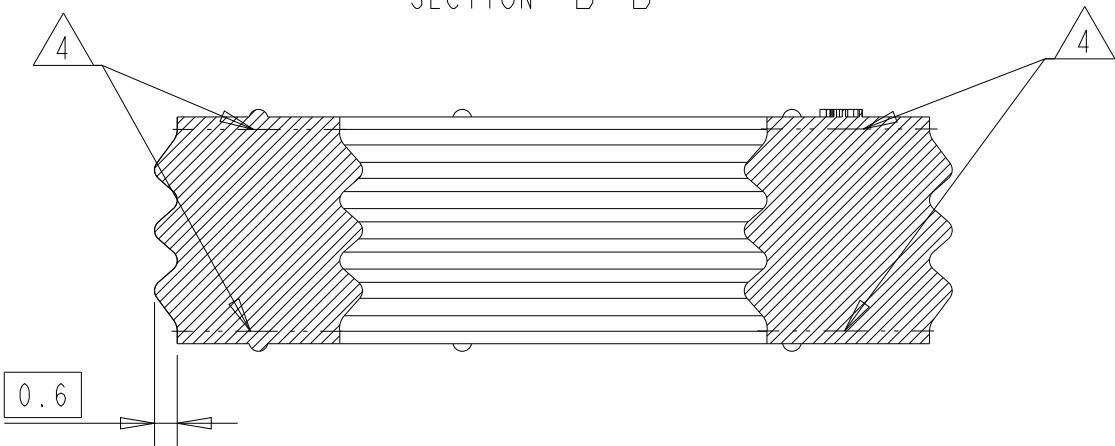

NOTES

- ① TE-SINGLE PART NUMBER.
- ② MATERIAL MARKING.
- ③ CAVITY MARKING IF MULTIPLE CAVITY TOOL
- ④ PARTING LINE
- ⑤ REVISION MARKINGS (A=NO DOT, B=1 DOT, ETC) TO APPEAR IN THIS LOCATION.
- 6 USE WIRE INSULATION O.D. RANGE OF 12.2mm TO 12.8mm.
- 7 PART DIMENSIONS SHOWN ARE IN PART'S FREE STATE CONDITION.
- ⑥ 8 BULK PACKAGING IN PLASTIC BAG OR AS PER SPEC V2402051.

SCALE 2:1



A2	A2	A2			
GREY	INHERENTLY LUBRICATED SILICONE SHORE HARDNESS 40±5	1.59	SINGLE WIRE SEAL, AC	A	2402051-1
COLOUR	MATERIAL	WEIGHT(g)	DESCRIPTION	REV	TE PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 07FEB2022 CHK SUBHAS H 07FEB2022 APVD AMRUTHA C H 07FEB2022 KASHYAP P B		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED		NAME SINGLE WIRE SEAL, AC	
		0 PLC ± 0.5 1 PLC ± 0.5 2 PLC ± 0.13 3 PLC ± 0.013 4 PLC ± 0.0001 ANGLES $\pm$		PRODUCT SPEC -	
MATERIAL - -		FINISH - -		APPLICATION SPEC -	
		WEIGHT -		SIZE A2	CAGE CODE 00779
CUSTOMER DRAWING				DRAWING NO C-2402051	RESTRICTED TO -
				SCALE 5:1	SHEET 1 OF 1
				REV A2	