

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER ECO-13-019095	05DEC2013	DR	RB
	E1	REVISED PER PCN-23-190965	31OCT2023	AP	CB


- 1

MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK
- 2


MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)
- 3

MATERIAL: SILICONE
COLOR: GREEN
4. RECOMMENDED WIRE DIAMETER RANGE IS 2.18 TO 3.67mm.


D

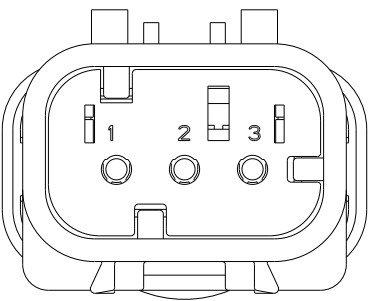


776430-2
SCALE 2:1
KEY B

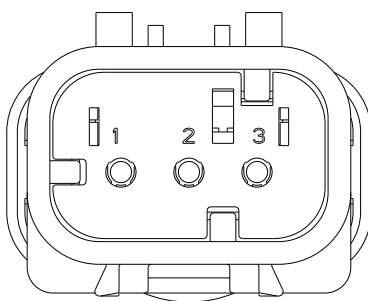


776430-3
SCALE 2:1
KEY C

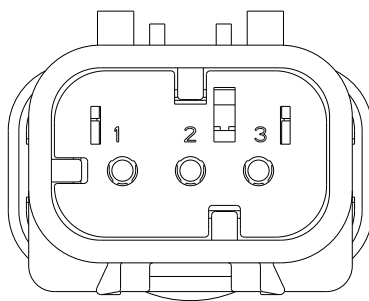


776430-4
SCALE 2:1
KEY D

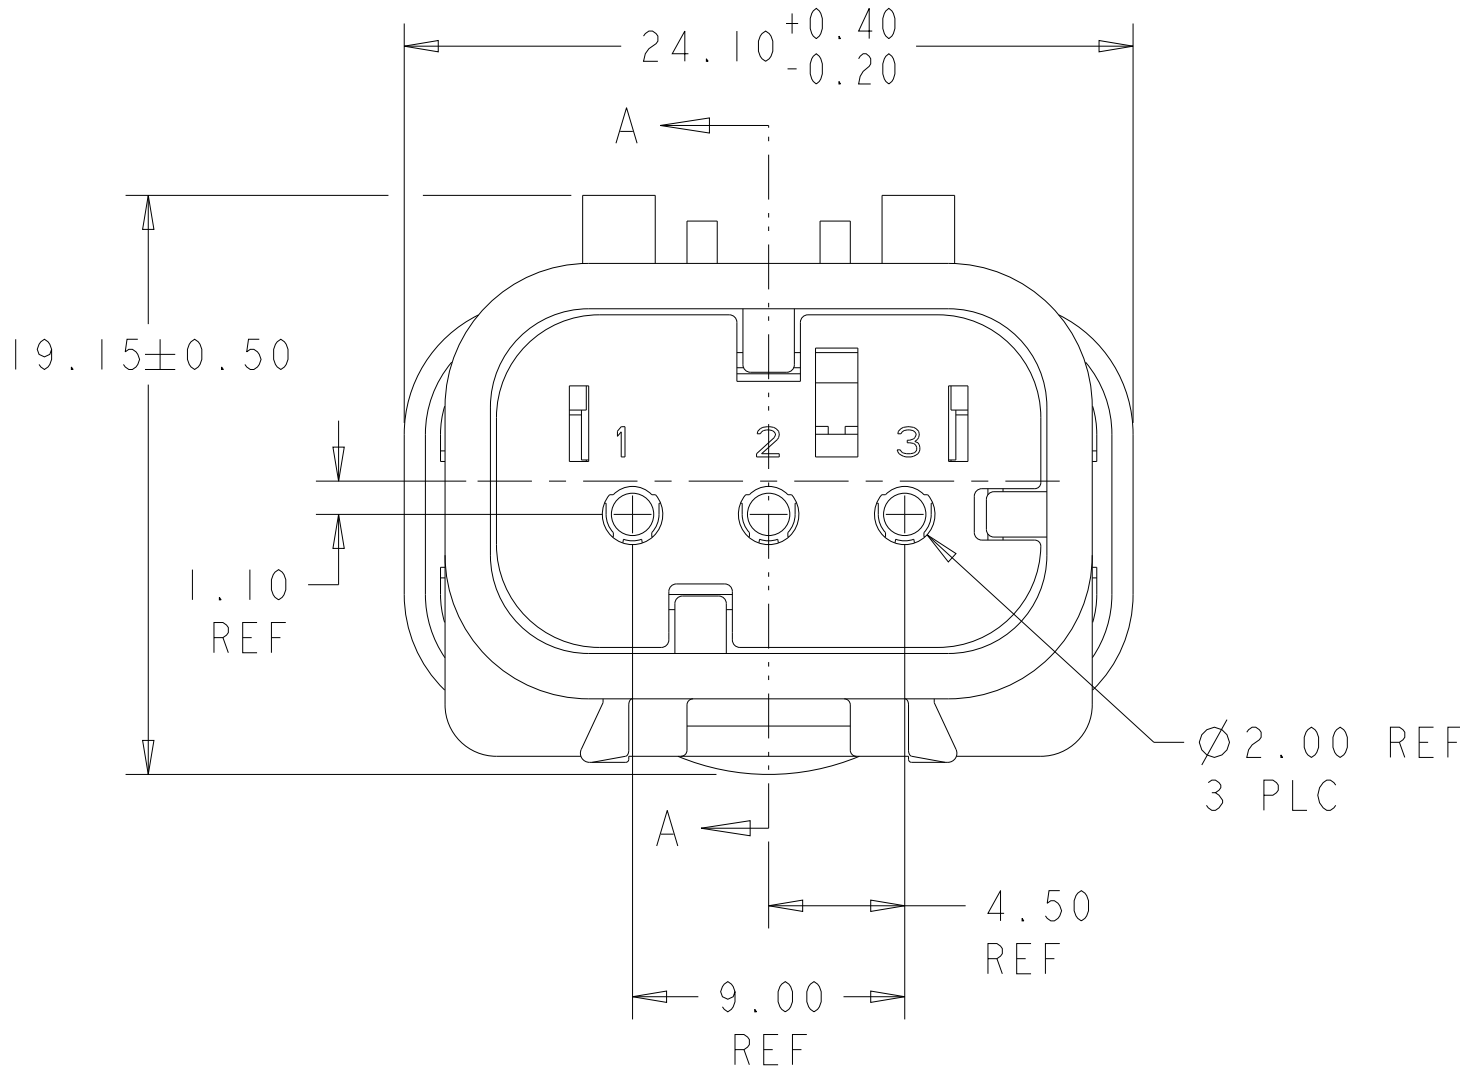


776430-1 SHOWN
KEY A

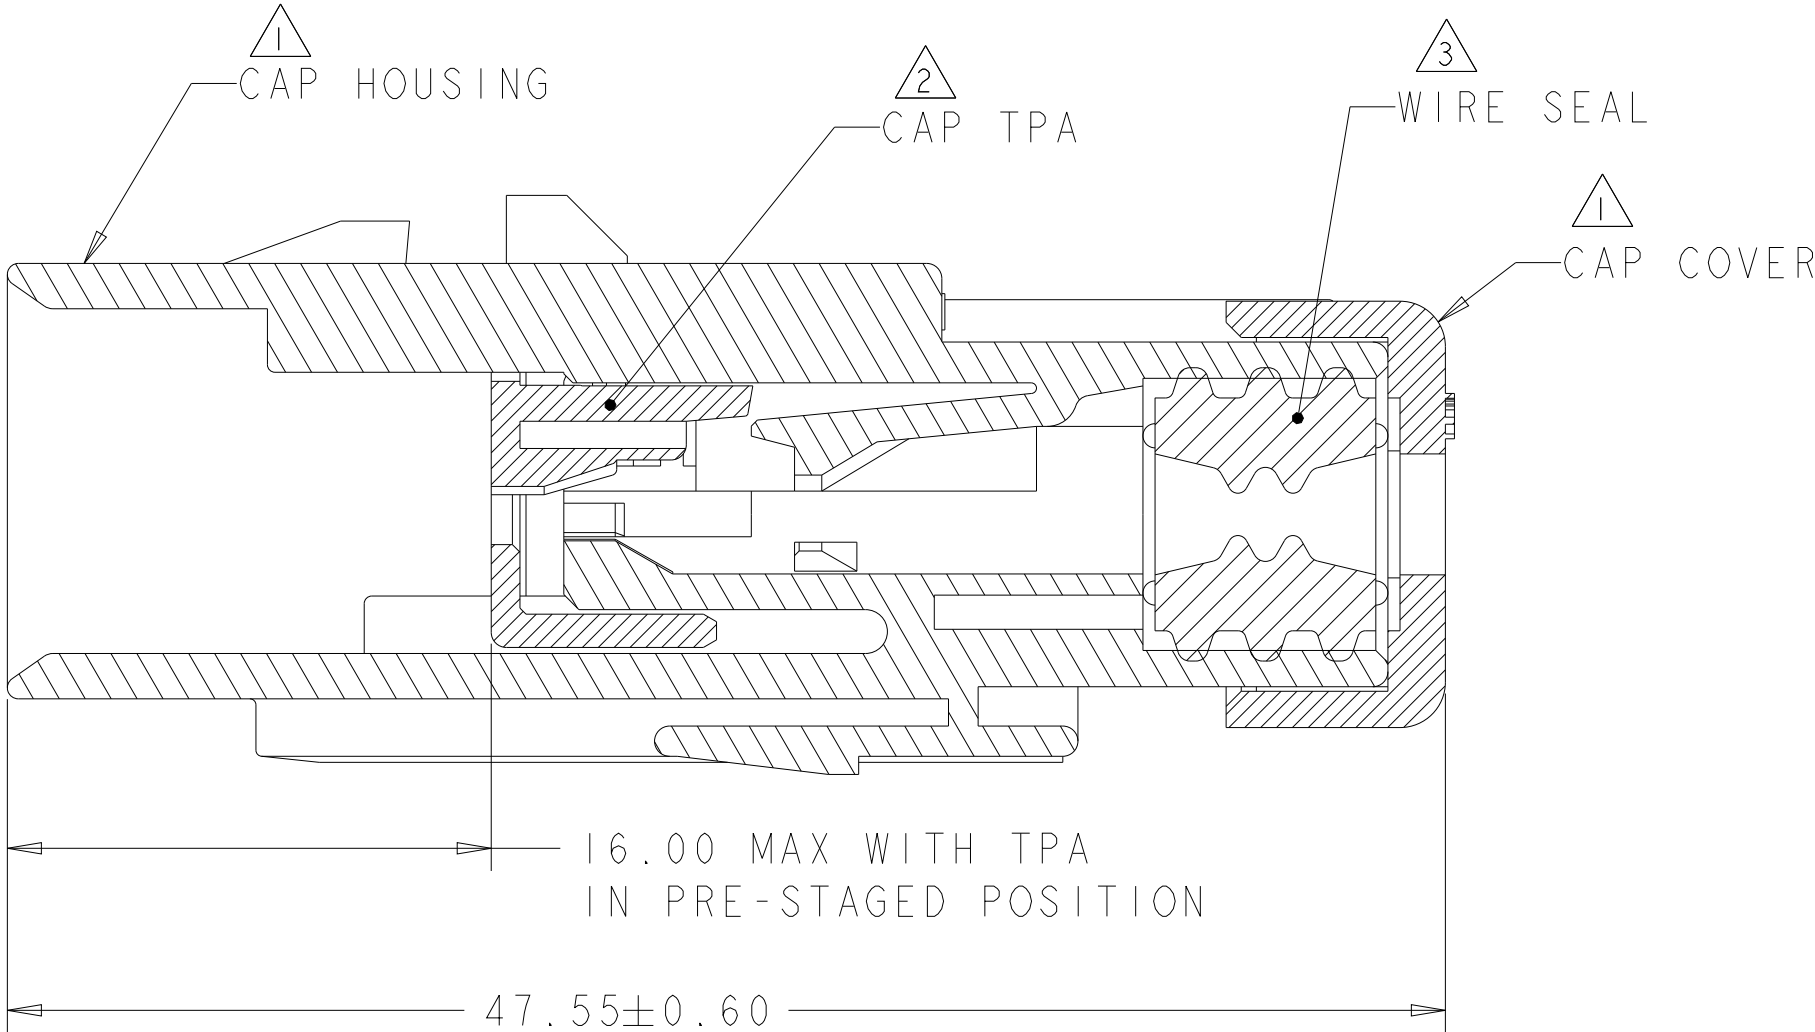

SECTION A-A

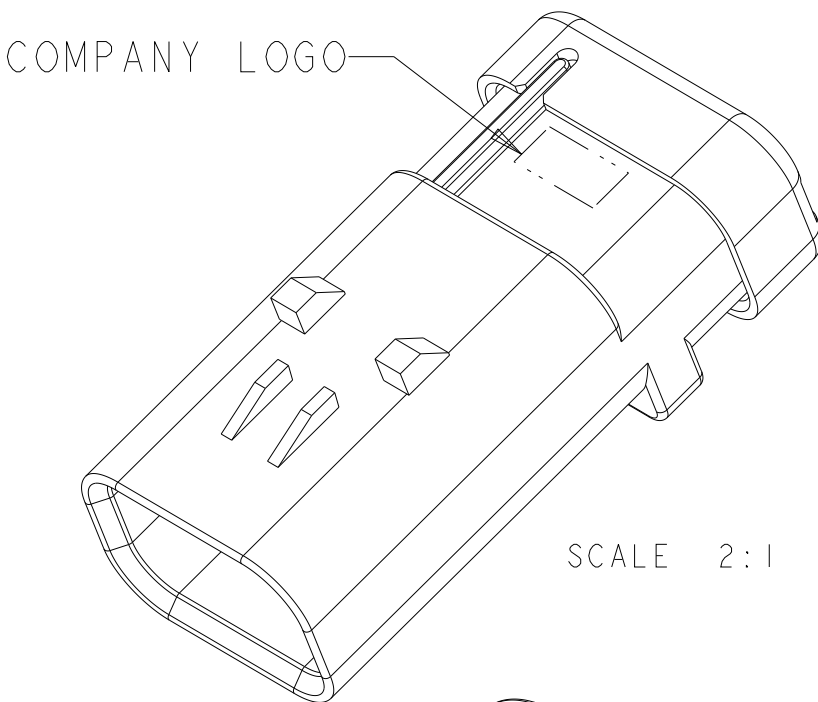


SCALE 2:1

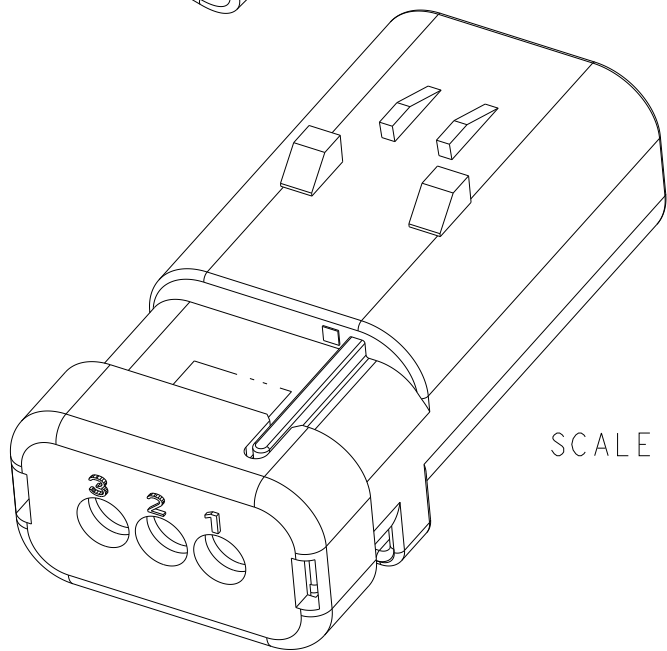

SCALE 2:1

B

B

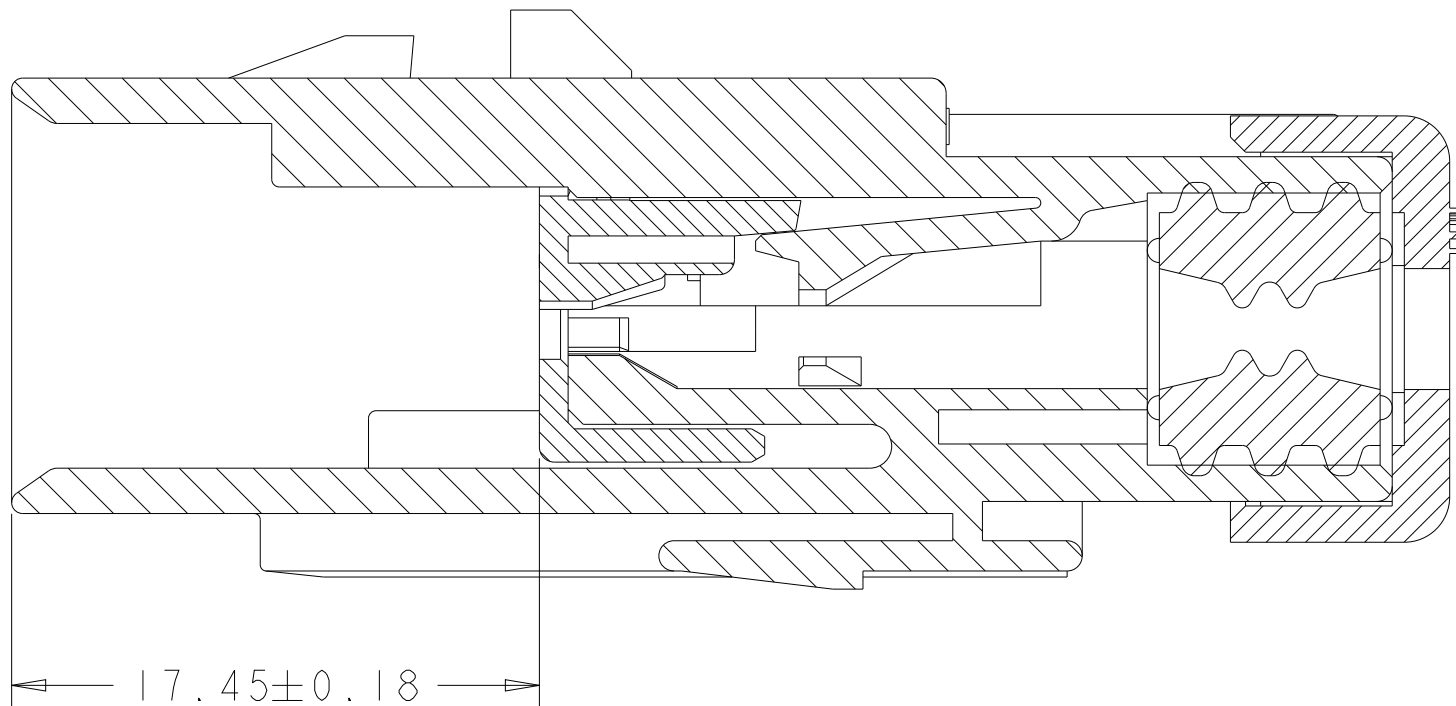

SECTION A-A
WITH TPA IN CLOSED POSITION

D	GREEN	776430-4
C	YELLOW	776430-3
B	GRAY	776430-2
A	RED	776430-1
KEY	TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Y. PETERSON	22FEB00	TE Connectivity CAP ASSEMBLY, 3 POSITION, SINGLE ROW, AMPSEAL 16			
DIMENSIONS: mm		CHK R. GREINER	11DEC01				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. TRULL	11DEC01	NAME			
0 PLC ±		PRODUCT SPEC		SIZE			
1 PLC ±		108-2184		CAGE CODE			
2 PLC ±		APPLICATION SPEC		DRAWING NO			
3 PLC ±		114-13065		RESTRICTED TO			
4 PLC ±		WEIGHT		A200779C-776430			
ANGLES ±		10		SCALE 4:1			
FINISH		Customer Drawing		SHEET 1 OF 1			
-				REV E1			
-							

A

A