

C. Westby 12-6-91
APPROVED/DATE
REV

SAFETY ORGANIZATION(S).

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET.

UL 1283
CSA 22.2, NO. 0.0.4, 8
VDE 565-3
SENKO APPROVED

OPERATING SPECIFICATIONS.

LINE VOLTAGE/CURRENT,
LINE FREQUENCY,
MAX. LEAKAGE CURRENT, EACH
LINE TO GROUND
OPERATING AMBIENT TEMP. RANGE,
IN AN AMBIENT, T_a , HIGHER THAN 40°C, THE MAXIMUM OPERATING
CURRENT, I_o , IS AS FOLLOWS,
 $I_o = I_r \sqrt{\frac{85-T_a}{45}}$

RELIABILITY SPECIFICATIONS.

STORAGE TEMPERATURE,
HUMIDITY,
CURRENT OVERLOAD TEST,
TEST SPECIFICATIONS.
INDUCTANCE,
CAPACITANCE, (MEASURED @ 1 KHz, 0.25 VAC MAX., 25°C ±1°C)
LINE TO GROUND,
LINE TO LINE,
DISCHARGE RESISTOR,
LINE/GROUND AND LINE/LINE
INSULATION RESISTANCE
(W/O DISCHARGE RESISTOR)

RECOMMENDED RECEIVING INSPECTION HIPO.

2250 VDC FOR 1 MINUTE
1450 VDC FOR 1 MINUTE

FILTER APPROVAL,
THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING
TO TEST THE UNIT IN YOUR EQUIPMENT.

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES
ENGLISH: ±.020
METRIC: ±

MATERIAL:

AS SUPPLIED


FINISH:

AS SUPPLIED




ACCESSORY OUTLET FILTER

DATE 9-20-91
SCALE NTS
REV. NO. 1EBF4.01

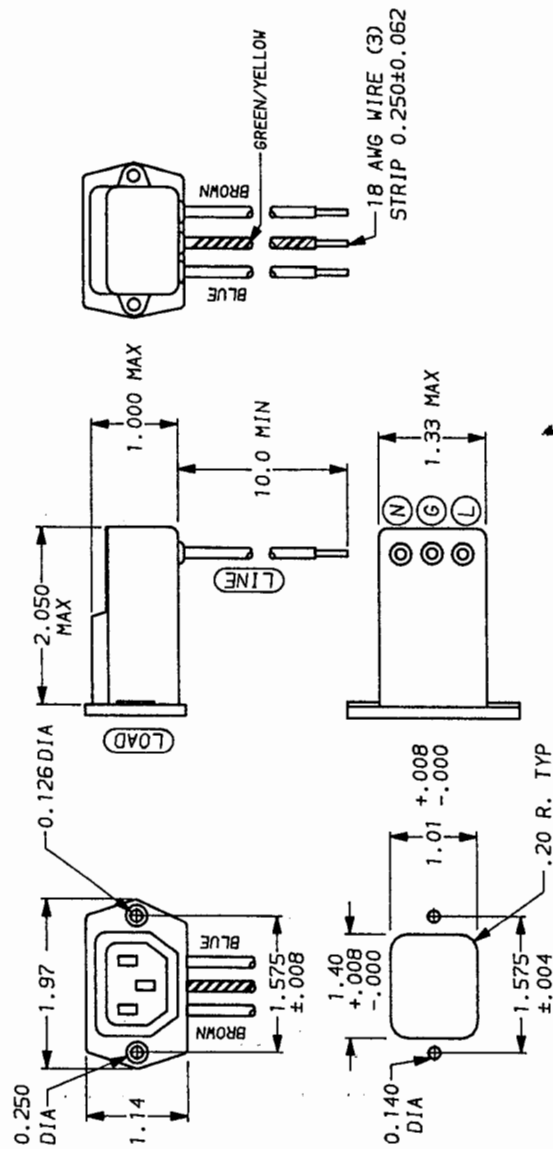

THIS FILTER LINE AND LOAD ARE REVERSED; THE SOCKET IS LOAD.

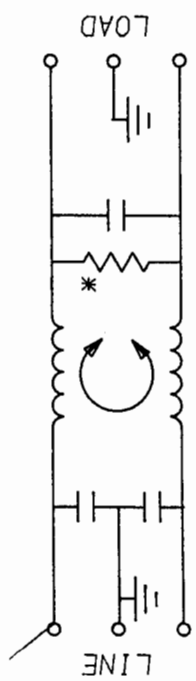

50a - 50a (MINIMUM) INSERTION LOSS												
FREQUENCY MHZ	.01	.05	.1	.15	.5	1	3	5	10	30		
COMMON dB	12	23	28	32	41	47	47	47	47	47	40	
DIFF. dB	—	—	1	3	14	23	41	47	50	44		

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

*RESISTOR ADDED TO PRODUCT BUILT AFTER 3-30-92 (9212)