



LUMAWISE LED HOLDERS

FOR NICHIA J SERIES COB

The LUMAWISE LED Holder, Type Z50, is a circular LED holder that provides a quick and easy solderless connection to the 19*24 mm Nichia J series COB. The Type Z50 holders allow the direct attachment of Nichia J series LEDs to the heat sink using standard screws, which helps enable designs to be easier to use, and faster to market. The Type Z50 reduces assembly costs and provides a quality solderless power connection, secure mechanical attachment, proper thermal hold down forces, and a landing zone with attachment features for additional secondary optics. These 19*24 mm LED Holders come in Zhaga profile (2213580-2) and low profile (2213580-1) form factors.

ELECTRICAL

- Current rating: 5A
- Voltage rating: 300 V AC/DC Max (UL1977)
- UL1977 and CSA recognized component (cUR)
- EC 60838-2-2 (up to 60VDC max)

MECHANICAL

- Operating temperature range: -40 to 105°C
- Utilize a screw size of #4 or M3 for attachment
- Poke-in style electrical contacts supporting 18-22 AWG (.35 - .75mm²) solid, fused and stranded wire
- Z50 w/optics attach: 50mm diameter by 6mm high
- Z50 low profile: 44 mm by 3.4 mm high
- Enables compliancy to Zhaga book 3 standard

MATERIALS

- High mechanical strength
- High heat resistance
- Good electrical properties
- UL94V-0 flammability rating

BENEFITS

- LED Snap-in feature simplifies installation
- Poke-in wire connection eliminates time consuming soldering
- Enables an easy electrical, thermal and optical connectivity for faster assembly and mass adoption of CoB
- Enables constant thermal down force to minimize influence by thermal plastic deformation at high temperature
- Makes easy and clean thermal paste application possible with built-in excess paste overflow feature
- Provides a specified and stable landing area for additional secondary optics (e.g. Carclo and LEDIL)

SPECIFICATIONS

- Application Specification: [114-32048](#)
- Product Specification: [108-133008](#)
- Product Qualification Report: 501-19197

APPLICATIONS



Architectural



Industrial



Residential



Retail



Outdoor (Street and Area)



Emergency




Commercial

LUMAWISE LED HOLDERS

PRODUCT SELECTION INFORMATION

Part Number	Description
2213580-1	LUMAWISE LED HOLDER Z50 LOW PROFILE 19*24
2213580-2	LUMAWISE LED HOLDER Z50 STD PROFILE 19*24

DIMENSIONS

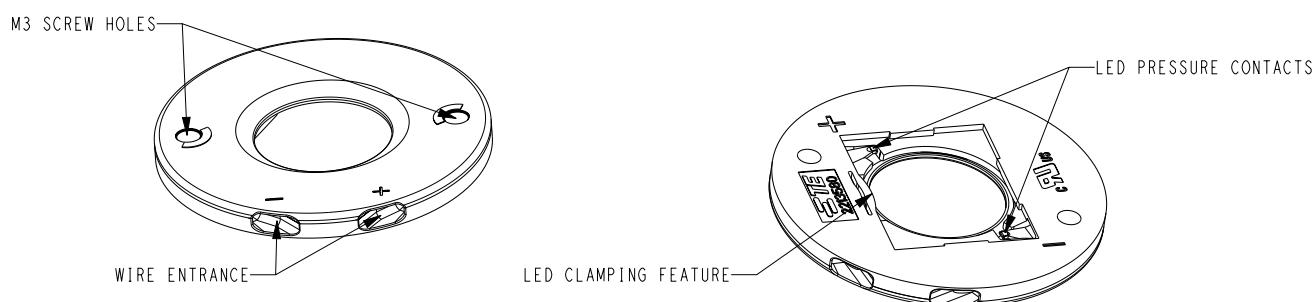

Connect With Us

We make it easy to connect with our experts and are ready to provide all the support you need.

Visit te.com/support to chat with a Product Information Specialist.

te.com/lumawise-led-holders

TE Connectivity, TE, TE connectivity (logo), LUMAWISE and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners..

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

©2025 TE Connectivity. All Rights Reserved.

Published 12-25