





REVISIONS					
P	LTR	DESCRIPTION	DATE	OWN	APVD
	F1	REV. ECO 17-011267	11SEP2017	HC	KR
	G	REV PER ECR-26-276026	10JUL2026	DK	JP

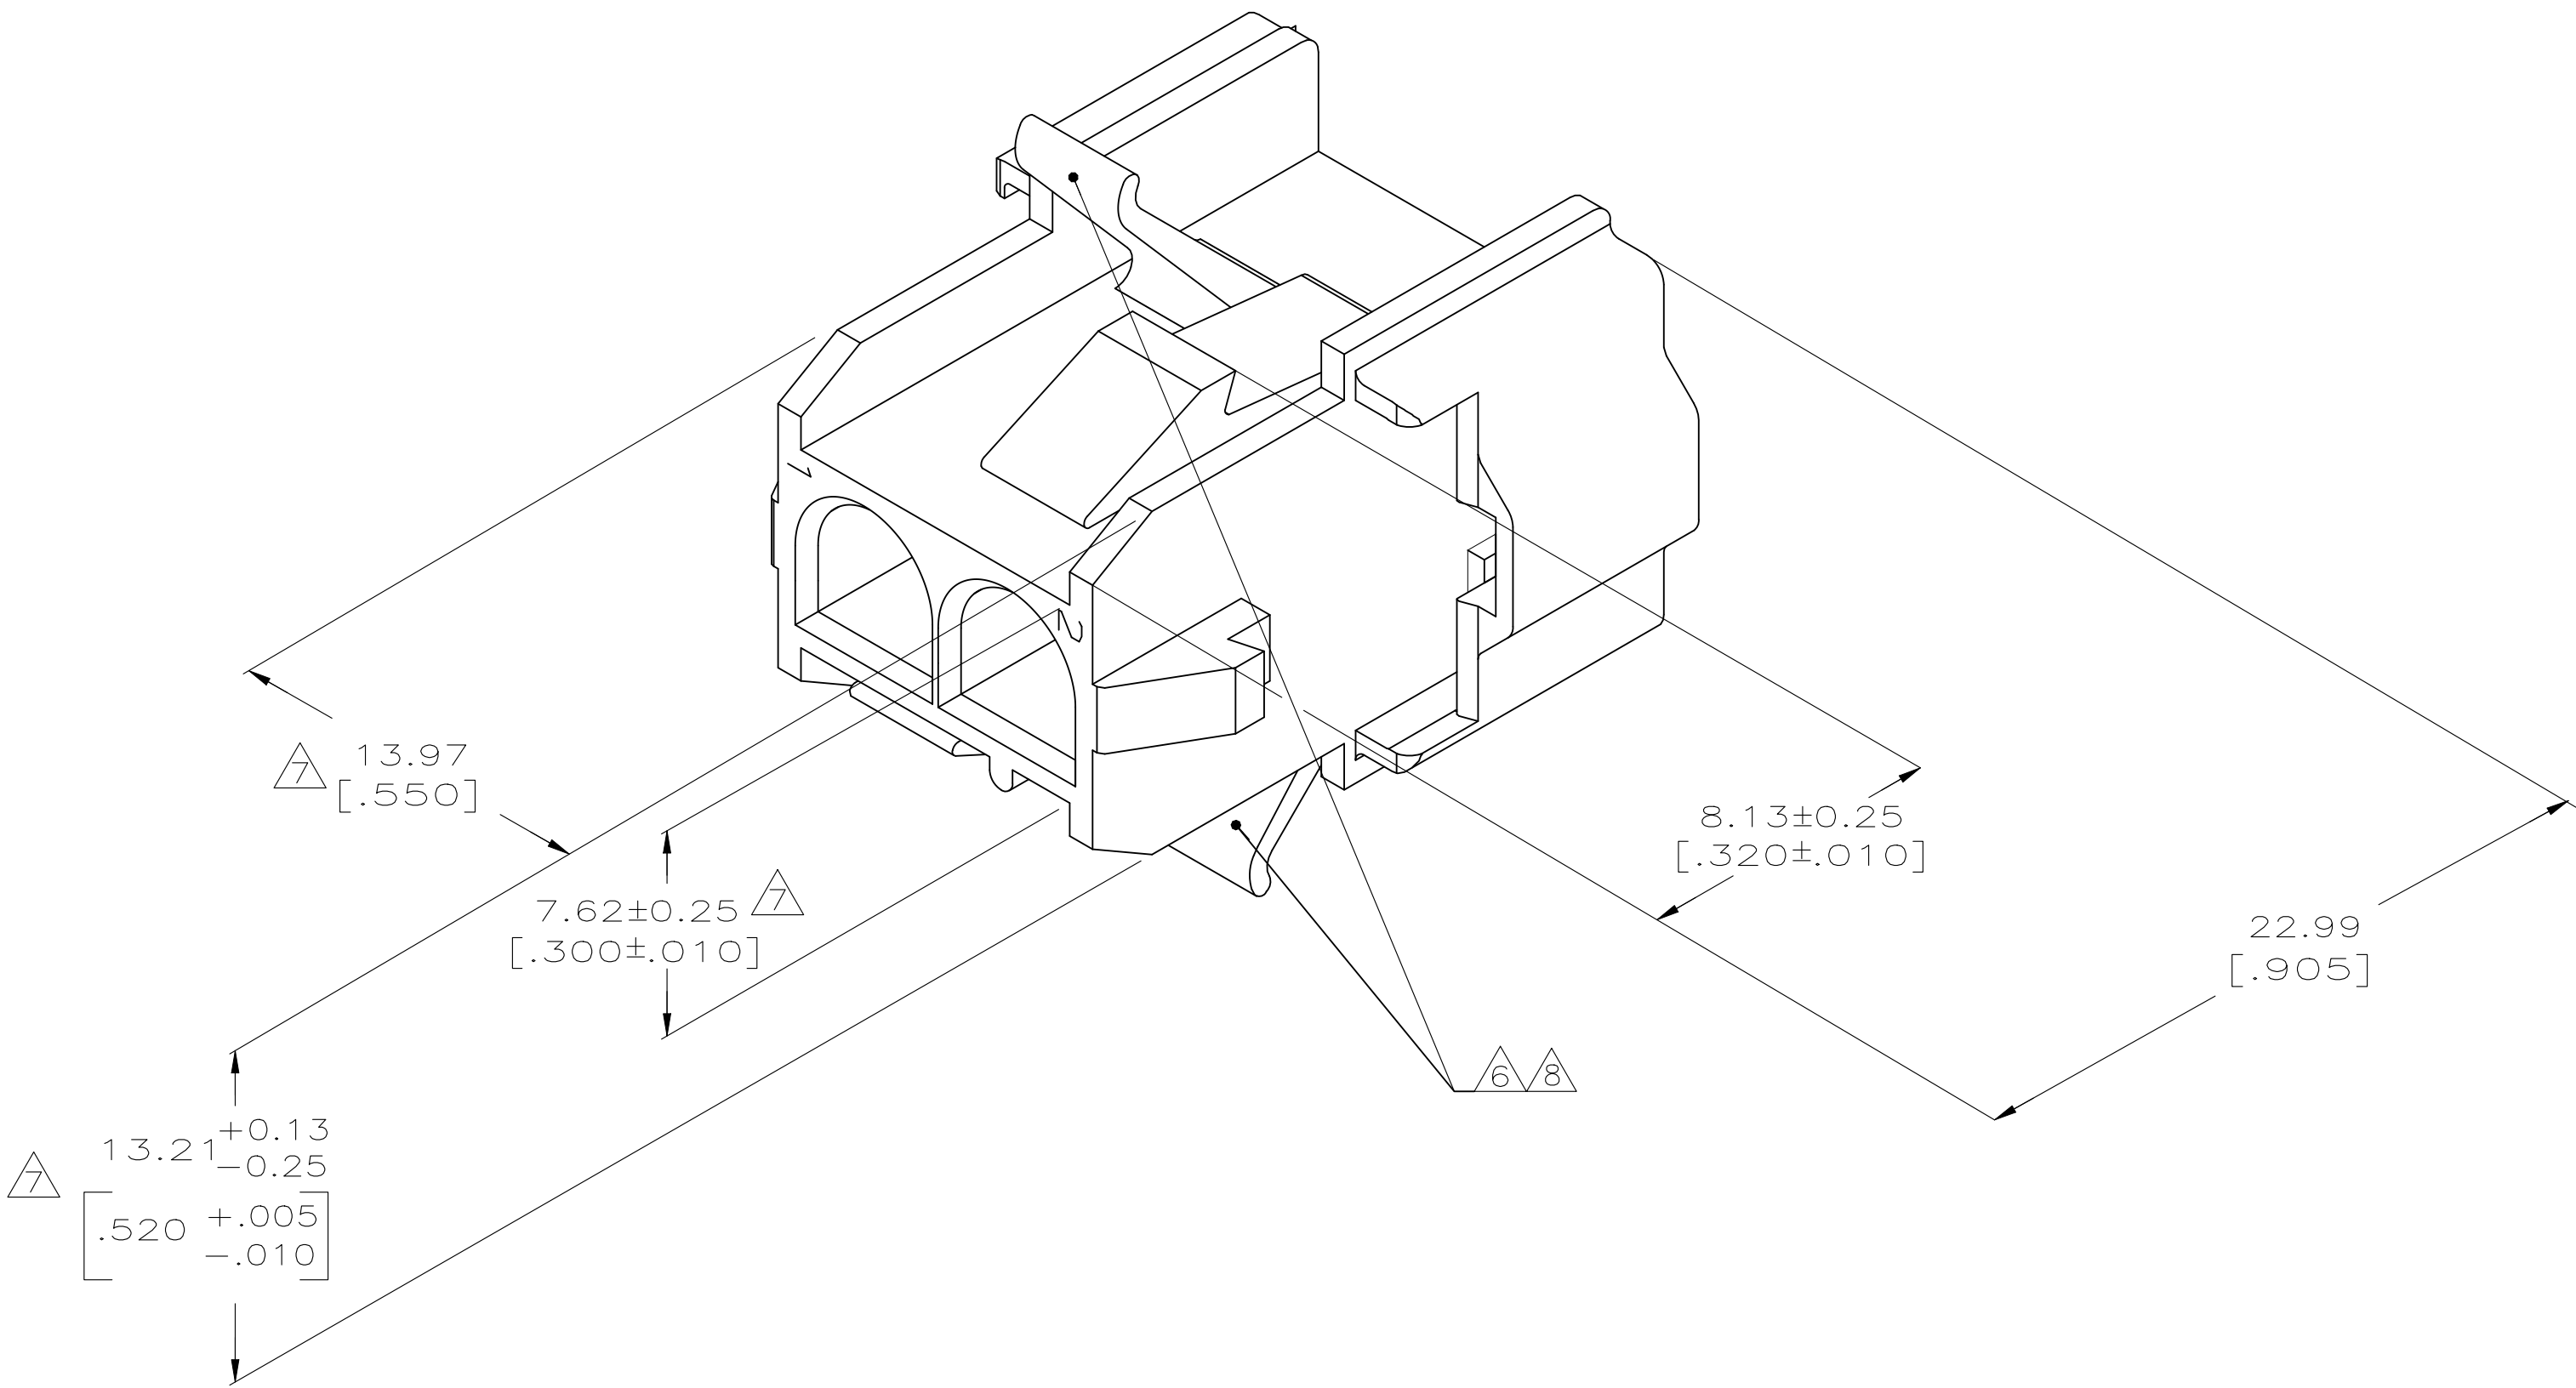

1. MUST BE ASSEMBLED WITH CAP REAR P/N 770046-1 BEFORE MATING. KIT P/N IS 770024-1.
2. RECOMMENDED PANEL THICKNESS 0.76-2.29 [.030-.090].
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. OPTIONAL FOR KEYING HOUSING IN PANEL.
5. CIRCUIT NUMBER 1 LOCATION.
6. AMP LOGO LOCATED ONCE ON ANY INDICATED SURFACE FAR SIDE.
7. DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
8. CSA LOGO LOCATED ONCE ON ANY INDICATED SURFACE

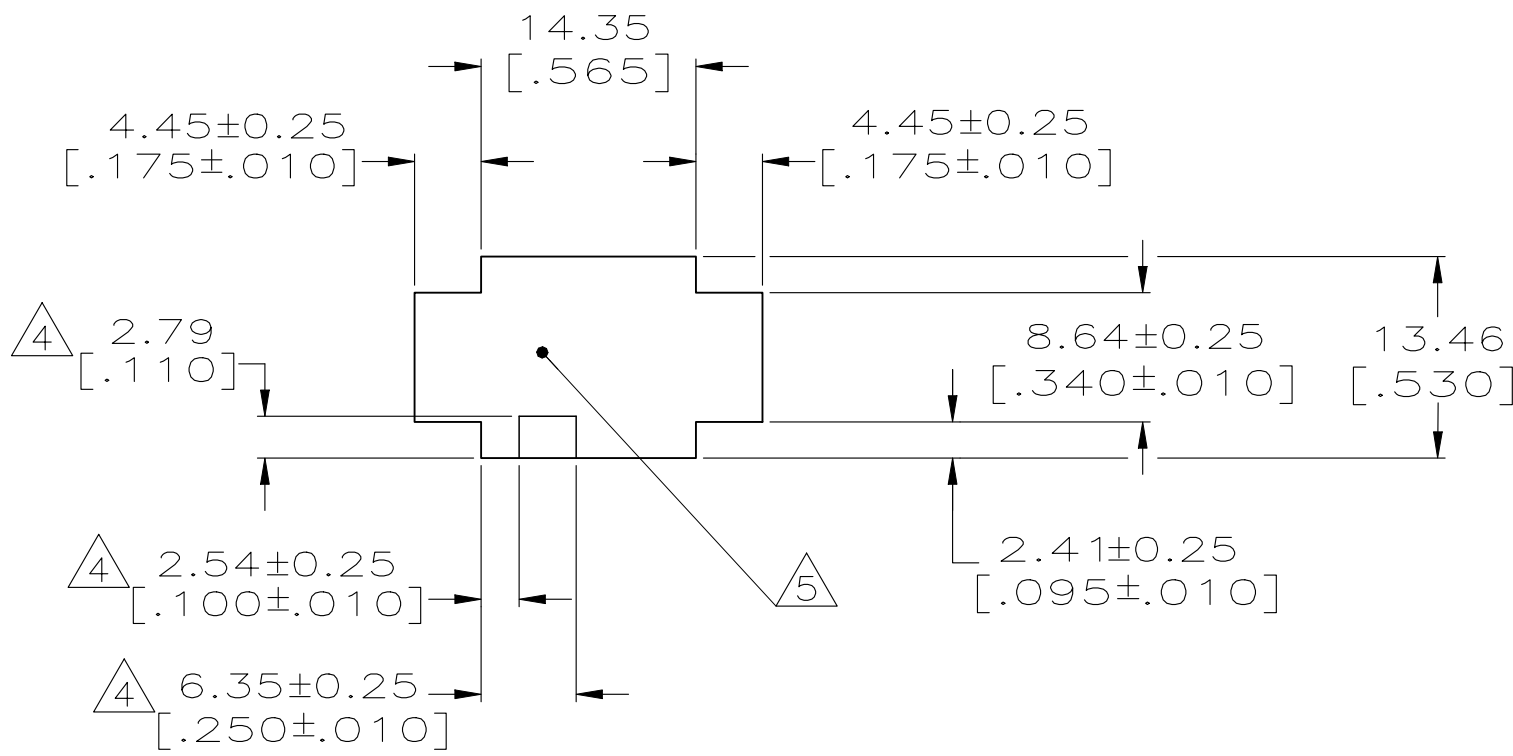

RECOMMENDED PANEL CUTOUT
(HOUSING ENTRY SIDE)
SCALE 2:1

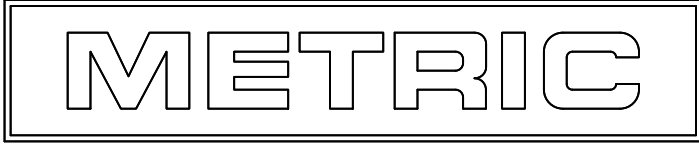

770045-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. SALMON	1-15-92	TE Connectivity	
		CHK R. SWING	1-15-92		
DIMENSIONS:		APVD M. TRULL	1-16-92	NAME CAP FRONT, 2 CIRCUIT, UNIVERSAL MATE-N-LOK TM II	
INCHES		PRODUCT SPEC			
		APPLICATION SPEC		SIZE	
				CAGE CODE	
				DRAWING NO	
				RESTRICTED TO	
MATERIAL NYLON,UL94V-0,		WEIGHT		A1 00779 C-770045	
FINISH		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV G	