



ULTRA MICRO CABLE-TO-CABLE

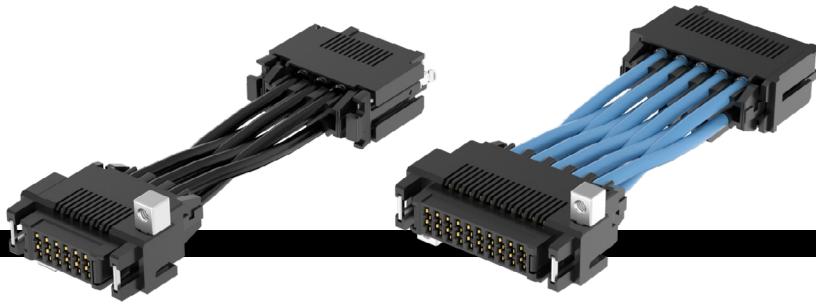

SERIES	NO. OF POSITIONS	PLATING OPTION	WIRE GAUGE	LENGTH	PINOUT																																																												
UMPI = Ultra Micro PVC Cable	-02, -03, -04, -05, -06, -07, -08, -09, -10	-L = 10 μ " (0.25 μ m) Gold on contact, Tin on tail	-16 = 16 AWG	"XX.X" = Assembled Length in Inches	(Leave blank for Single ended)																																																												
UMPI = Ultra Micro Blue *Teflon™ Fluoropolymer Cable		-T = Tin	-16C = 16 AWG Color Coded Cable (not available with UMPI)	Single ended = (76.2 mm) 03.0" min.	-M1 = Metal Latch Pin 01 to Pin 01																																																												
UMPI(T) Cable Mates: UMPE(T) End 2 Mates: UMPE(T), UMPT			-18 = 18 AWG	Double ended = (101.6 mm) 04.0" min. (2-4 positions)	-M2 = Metal Latch Pin 01 to Pin N																																																												
			-18C = 18 AWG Color Coded Cable (not available with UMPI)	Double ended = (127.0 mm) 05.0" min. (5-10 positions)	-P1 = Plastic Latch Pin 01 to Pin 01																																																												
					-P2 = Plastic Latch Pin 01 to Pin N																																																												
SPECIFICATIONS																																																																	
Insulator Material: Black LCP Contact Material: Copper Alloy Plating: Sn or Au over 50 μ " (1.27 μ m) Ni Wire: 16 or 18 AWG Current Rating: 16 AWG Tin = 18.5 A per pin 18 AWG Tin = 17.5 A per pin 16 AWG Gold = 22.5 A per pin Voltage Rating: 445 VAC/629 VDC																																																																	
UMPI CABLE HOLDER (Required for use with IMPC)																																																																	
<table border="1"> <thead> <tr> <th>CABLE COLOR CODING</th> <th>NO. OF POSITIONS</th> <th>A</th> <th>B</th> <th>C</th> </tr> <tr> <th>PIN</th> <th>COLOR</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>BROWN</td> <td>(17.25)</td> <td>.522</td> <td>(14.55).573</td> </tr> <tr> <td>2</td> <td>RED</td> <td>(19.25)</td> <td>.758</td> <td>(15.25).600</td> </tr> <tr> <td>3</td> <td>ORANGE</td> <td>(21.25)</td> <td>.837</td> <td>(17.25).679</td> </tr> <tr> <td>4</td> <td>YELLOW</td> <td>(23.25)</td> <td>.915</td> <td>(19.25).758</td> </tr> <tr> <td>5</td> <td>GREEN</td> <td>(25.25)</td> <td>.994</td> <td>(20.55).809</td> </tr> <tr> <td>6</td> <td>BLUE</td> <td>(27.25)</td> <td>1.073</td> <td>(22.55).888</td> </tr> <tr> <td>7</td> <td>VIOLET</td> <td>(29.25)</td> <td>1.152</td> <td>(23.25).915</td> </tr> <tr> <td>8</td> <td>GRAY</td> <td>(31.25)</td> <td>1.230</td> <td>(25.25).994</td> </tr> <tr> <td>9</td> <td>WHITE</td> <td>(33.25)</td> <td>1.309</td> <td>(26.55) 1.045</td> </tr> <tr> <td>10</td> <td>BLACK</td> <td>(35.25)</td> <td>1.152</td> <td>(28.55) 1.124</td> </tr> </tbody> </table>						CABLE COLOR CODING	NO. OF POSITIONS	A	B	C	PIN	COLOR				1	BROWN	(17.25)	.522	(14.55).573	2	RED	(19.25)	.758	(15.25).600	3	ORANGE	(21.25)	.837	(17.25).679	4	YELLOW	(23.25)	.915	(19.25).758	5	GREEN	(25.25)	.994	(20.55).809	6	BLUE	(27.25)	1.073	(22.55).888	7	VIOLET	(29.25)	1.152	(23.25).915	8	GRAY	(31.25)	1.230	(25.25).994	9	WHITE	(33.25)	1.309	(26.55) 1.045	10	BLACK	(35.25)	1.152	(28.55) 1.124
CABLE COLOR CODING	NO. OF POSITIONS	A	B	C																																																													
PIN	COLOR																																																																
1	BROWN	(17.25)	.522	(14.55).573																																																													
2	RED	(19.25)	.758	(15.25).600																																																													
3	ORANGE	(21.25)	.837	(17.25).679																																																													
4	YELLOW	(23.25)	.915	(19.25).758																																																													
5	GREEN	(25.25)	.994	(20.55).809																																																													
6	BLUE	(27.25)	1.073	(22.55).888																																																													
7	VIOLET	(29.25)	1.152	(23.25).915																																																													
8	GRAY	(31.25)	1.230	(25.25).994																																																													
9	WHITE	(33.25)	1.309	(26.55) 1.045																																																													
10	BLACK	(35.25)	1.152	(28.55) 1.124																																																													
View complete specifications at: samtec.com?UMPI & samtec.com?UMPT																																																																	



CABLE COLOR CODING	NO. OF POSITIONS	A	B	C
PIN	COLOR			
1	BROWN	(17.25)	.522	(14.55).573
2	RED	(19.25)	.758	(15.25).600
3	ORANGE	(21.25)	.837	(18.55).730
4	YELLOW	(23.25)	.915	(20.55).809
5	GREEN	(25.25)	.994	(22.55).888
6	BLUE	(27.25)	1.073	(24.55).967
7	VIOLET	(29.25)	1.152	(23.25).915
8	GRAY	(31.25)	1.230	(25.25) 1.045
9	WHITE	(33.25)	1.309	(26.55) 1.124
10	BLACK	(35.25)	1.152	(30.55) 1.203

*Teflon™ is a trademark of The Chemours Company FC, LLC used under license by Samtec.

Notes:
Teflon™ Fluoropolymer cable is intended for crimp only. Contact Samtec for solderable cable applications.

For wiring option information refer to drawings on web.

Some lengths, styles and options are non-standard, non-returnable

IMPC	NO. OF POSITIONS	LATCH OPTION	CC489	01	PLATING	PACKAGING
	-02, -03, -04, -05, -06, -07, -08, -09, -10	-P1 = Panel Mount			-L = 10 μ " (0.25 μ m) Gold on contact, Tin on tail	-R = Full Reel (5,000 Contacts)
					-T = Tin	-M = Mini Reel (1,000 Contacts)
						-B = Bubble Bag (35 Contacts)

TOOLING

Hand Tool: CAT-HT-489-1618-13

Mini Applicator: CAT-MC-489-1618-XX-01

View complete specifications at: samtec.com?IMPC & samtec.com?CC489

Note:
Some lengths, styles and options are non-standard, non-returnable.