HIGH-SPEED THROUGH BOARD SOCKET

(1.00 mm) .0394" PITCH • SAL1 SERIES

14 Gbps

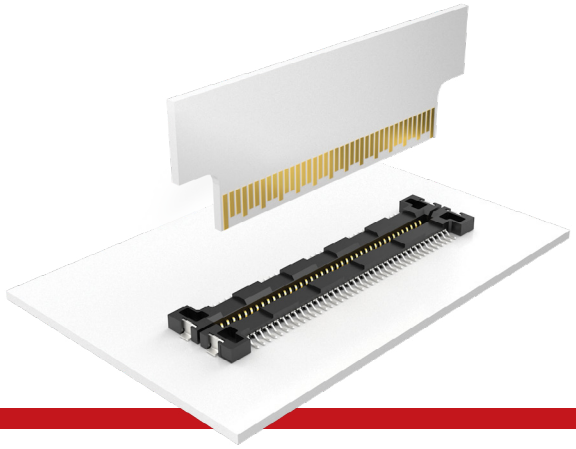

SAL1

Card Mates:
(1.60 mm) .062" or
(2.36 mm) .093" card

SAL1	-	1	NO. OF POSITIONS	-	01	-	PLATING OPTION	-	S	-	A	-	OPTION
			–20, –27, –30, –40				–S = 30 µ" (0.76 µm) Gold on contact, Matte tin on tail						–TR = Tape & Reel –FR = Full Reel Tape & Reel (must order maximum quantity per reel; contact Samtec for quantity breaks)

SPECIFICATIONS

Insulator Material:
Black LCP
Contact Material:
BeCu
Plating:
Au or Sn over 50 µ" (1.27 µm) Ni
Operating Temp Range:
-55 °C to +125 °C
Current Rating:
2.9 A per pin
(2 adjacent pins powered)
Voltage Rating:
215 VAC/304 VDC

PROCESSING

Lead-Free Solderable:
Yes
SMT Lead Coplanarity:
(0.10 mm) .004" max

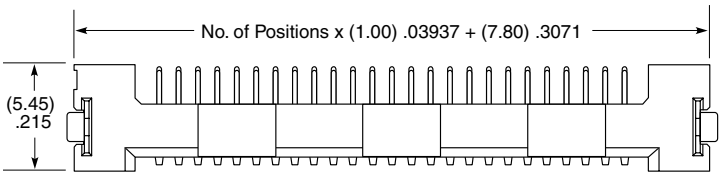

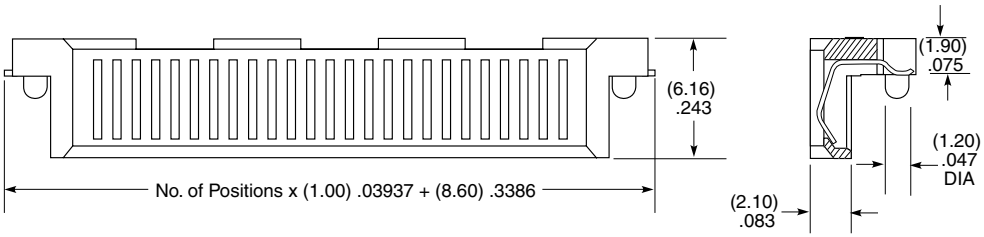

OTHER SOLUTION



Card pass-through option.
See HSEC8-PE Series.

APPLICATIONS

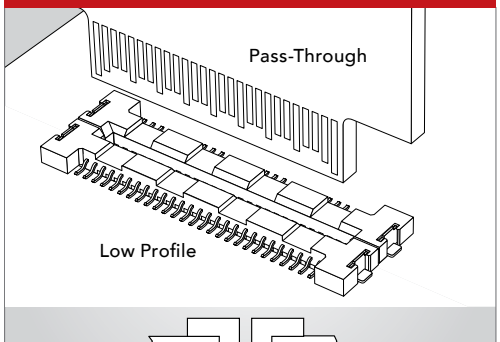

Same side mount

Notes:
While optimized for 50 Ω applications, this connector with alternative signal/ground patterns may also perform well in certain 75 Ω applications..

Some lengths, styles and options are non-standard, non-returnable.

View complete specifications at: **samtec.com?SAL1**

Unless otherwise approved in writing by Samtec, all parts and components are designed and built according to Samtec's specifications which are subject to change without notice.