

SAIL-M12GM12W-5-1.5T


Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

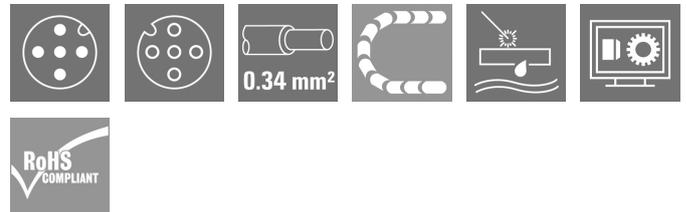

Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

Our developers have focused specifically on this issue and designed a host of different M8 and M12 sensor-actuator cables so you are bound to find the solution you need for your application.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

General ordering data

| | |
|------------|---|
| Version | Sensor/actuator line, Connecting line, M12 / M12, Number of poles : 5, 1.5 m, pin, straight - socket, 90°, Shielded: No, LED: No, Sheath material: PUR, Halogen: No |
| Order No. | 1011990150 |
| Type | SAIL-M12GM12W-5-1.5T |
| GTIN (EAN) | 4032248719525 |
| Qty. | 1 pc(s). |

Creation date June 14, 2025 4:31:58 PM CEST

Catalogue status 07.06.2025 / We reserve the right to make technical changes.

SAIL-M12GM12W-5-1.5T

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight 83.6 g

Technical specifications for cable

| | | | |
|--|-----------------------|----------------------------------|---------------------------------|
| Acceleration | 5 m/s ² | Bending cycles | 10 Mio |
| Bending radius, min., moving | 7.5 x cable diameter | Bending radius, min., stationary | 4 x cable diameter |
| Cable length | 1.5 m | Colour coding | brown, white, blue, black, grey |
| Configurable cable length | Yes | Core cross-section | 0.34 mm ² |
| Halogen | No | Insulation | PP |
| Irradiation crosslinked | No | Number of poles | 5 |
| Outer cladding in accordance with UL AWM style | 20233 (80 °C / 300 V) | Outside diameter | 5.1 mm ± 0.2 mm |
| Resistant to welding beads | Yes | Sheath material | PUR |
| Sheathing colour | black | Shielded | No |
| Speed | 200 m/s | Suitable for cable carriers | Yes |
| Temperature range, moving | -30...105 °C | Temperature range, stationary | -40...105 °C |
| Torsion resistance | 360 °/m | Welding spark resistance | Yes |

General technical data

| | | | |
|--|---------------------------------|------------------------------|---|
| AF size | 12 mm | Coding | A-coded |
| Connection thread | M12 / M12 | Contact surface | Gold-plated |
| Housing main material | PUR | Insulation strength | 10 ⁸ Ω |
| LED | No | Plugging cycles | ≥ 100 |
| Pollution severity | 3 | Protection degree | IP65, IP66, IP67, IP68, IP69, when screwed in |
| Rated current | 4 A | Rated voltage | 60 V |
| Shock and vibration proof according to | Section B | Temperature range of housing | -25...+85 °C |
| Threaded ring material | Diecast zinc | Tightening torque | M12: 0.8 - 1.2 Nm |
| Version | pin, straight - socket, 90° | jumpared | No |

Electrical properties

Insulation strength 10⁸ Ω Rated voltage 60 V

General standards

Certificate no. (cULus) E307231 Connector standard IEC 61076-2-101

Standards

Connector standard IEC 61076-2-101 Shock and vibration proof according to Section B

Plug, left

Plug left M12, A-coded, IP69, male contact, straight, Plastic, unshielded

SAIL-M12GM12W-5-1.5T**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Plug, right**

| | |
|------------|---|
| Plug right | M12, A-coded, IP69, female contact, angled 90°, Plastic, unshielded |
|------------|---|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001855 | ETIM 7.0 | EC001855 |
| ETIM 8.0 | EC001855 | ETIM 9.0 | EC001855 |
| ETIM 10.0 | EC001855 | ECLASS 9.0 | 27-06-03-11 |
| ECLASS 9.1 | 27-06-03-11 | ECLASS 10.0 | 27-06-03-11 |
| ECLASS 11.0 | 27-06-03-11 | ECLASS 12.0 | 27-06-03-11 |
| ECLASS 13.0 | 27-06-03-11 | ECLASS 14.0 | 27-06-03-11 |
| ECLASS 15.0 | 27-06-03-11 | | |

Environmental Product Compliance

| | |
|--------------------------------------|--------------------------------------|
| RoHS Compliance Status | Compliant with exemption |
| RoHS Exemption (if applicable/known) | 6c |
| REACH SVHC | Lead 7439-92-1 |
| SCIP | 1c533b66-fcff-4da5-b89f-fd55fbf5cb55 |

Approvals

Approvals



| | |
|-------------------------|---|
| Approvals MAMID | https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319228/-T1z1mm-S800/ |
| ROHS | Conform |
| UL File Number Search | UL Website |
| Certificate no. (cULus) | E307231 |

Downloads

| | |
|-----------------------------|---|
| Product Change Notification | DE - Technische Änderung zu M12 Gewinding mit 6-Kant EN - Technical change to M12 nut with additional hexagonal mounting Technical change to 3 to 5-pole unshielded M12 cord sets |
| Catalogues | Catalogues in PDF-format |
| Brochures | FL FIELDWIRING EN FL FIELDWIRING EN |


SAIL-M12GM12W-5-1.5T

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com


Drawings

Dimensioned drawing

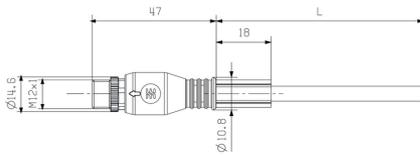


Male, straight

Pole scheme

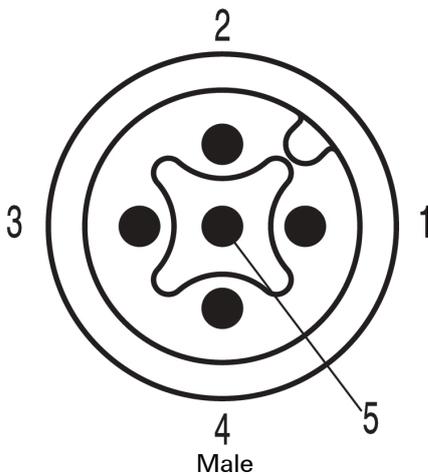


Dimensioned drawing

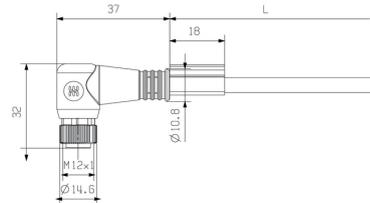


Angled socket

Pole scheme

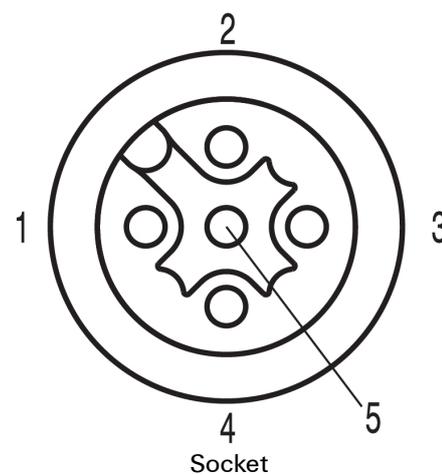

Wiring diagram

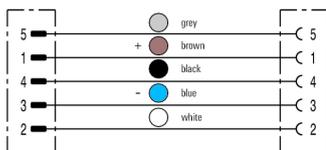

The ideal tool: Screwty® with torque function

Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F