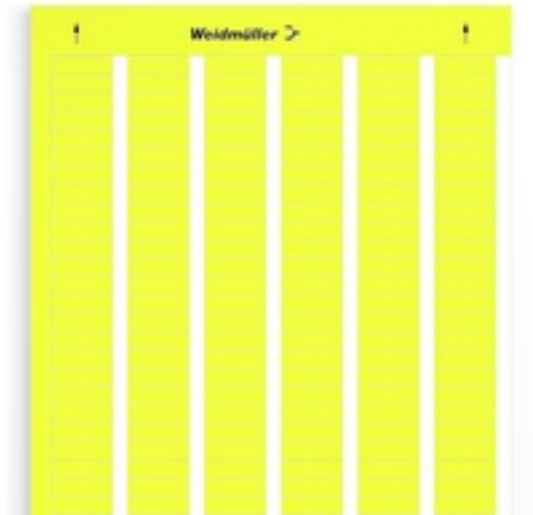


**LM MT300 27/8 GE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Similar to illustration

- Adhesive polyester labels
- Suitable for A4 laser printers
- Abrasion-resistant
- High heat resistance
- For marking all kinds of switchgear and modules
- Can also be written on with a ballpoint pen or STI marking pen

**General ordering data**

|            |                                              |
|------------|----------------------------------------------|
| Version    | LaserMark, Device markers, 8 x 27 mm, yellow |
| Order No.  | <a href="#">1861510000</a>                   |
| Type       | LM MT300 27/8 GE                             |
| GTIN (EAN) | 4032248421404                                |
| Qty.       | 10 pc(s).                                    |

## LM MT300 27/8 GE

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 0.08 mm | Depth (inches)  | 0.003 inch |
| Height     | 8 mm    | Height (inches) | 0.315 inch |
| Width      | 27 mm   | Width (inches)  | 1.063 inch |
| Net weight | 11.5 g  |                 |            |

## Temperatures

|                             |              |
|-----------------------------|--------------|
| Operating temperature range | -40...150 °C |
|-----------------------------|--------------|

## General data

|                                              |                                           |             |
|----------------------------------------------|-------------------------------------------|-------------|
| Adhesive                                     | Acrylate adhesive                         |             |
| Approval acc. to UL 969                      | Yes                                       |             |
| Colour                                       | yellow                                    |             |
| Halogen                                      | No                                        |             |
| Material                                     | Polyester, PVC-free                       |             |
| Material colour according to resistance code | 4                                         |             |
| Number of markers per combination            | 1 Label sheet = 198 Device markers        |             |
| Number of markers per packaging unit         | 1,980                                     |             |
| Number of markers per packaging unit         | Number of markers per combination         | 198         |
|                                              | Number of combinations per packaging unit | 10          |
|                                              | Form of supply                            | Label sheet |
| Number per sheet                             | 198                                       |             |
| Operating temperature range                  | -40... 150 °C                             |             |
| Operating temperature range, max.            | 150 °C                                    |             |
| Operating temperature range, min.            | -40 °C                                    |             |
| Printed characters                           | without                                   |             |
| Printing method                              | Laser print                               |             |
| UL 94 flammability rating                    | HB                                        |             |
| Version                                      | Self-adhesive                             |             |
| Width                                        | 27 mm                                     |             |

## Device markers

|         |    |
|---------|----|
| Halogen | No |
|---------|----|

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001288    | ETIM 7.0    | EC001288    |
| ETIM 8.0    | EC001288    | ETIM 9.0    | EC001288    |
| ETIM 10.0   | EC001288    | ECLASS 9.0  | 27-40-06-29 |
| ECLASS 9.1  | 27-40-06-29 | ECLASS 10.0 | 27-40-06-29 |
| ECLASS 11.0 | 27-28-11-04 | ECLASS 12.0 | 27-28-11-04 |
| ECLASS 13.0 | 27-28-11-04 | ECLASS 14.0 | 27-28-11-04 |
| ECLASS 15.0 | 27-28-11-04 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## LM MT300 27/8 GE

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Approvals

ROHS

Conform

### Downloads

Engineering Data

[CAD data – STEP](#)

Catalogues

[Catalogues in PDF-format](#)

**LM MT300 27/8 GE**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

