FLORENTINA-HLD-BW

~60° batwing beam

SPECIFICATION:

Dimensions	285.6 x 19.5
Height	10.2 mm
Fastening	clips
ROHS compliant	yes

MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
FLORENTINA-HLD	Holder	PC	black		
TINA-BW	Single lens	PMMA	clear		

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
FP16391_FLORENTINA-HLD-BW » Box size: 398 x 298 x 140 mm	Single lens	160	32	16	3.6

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

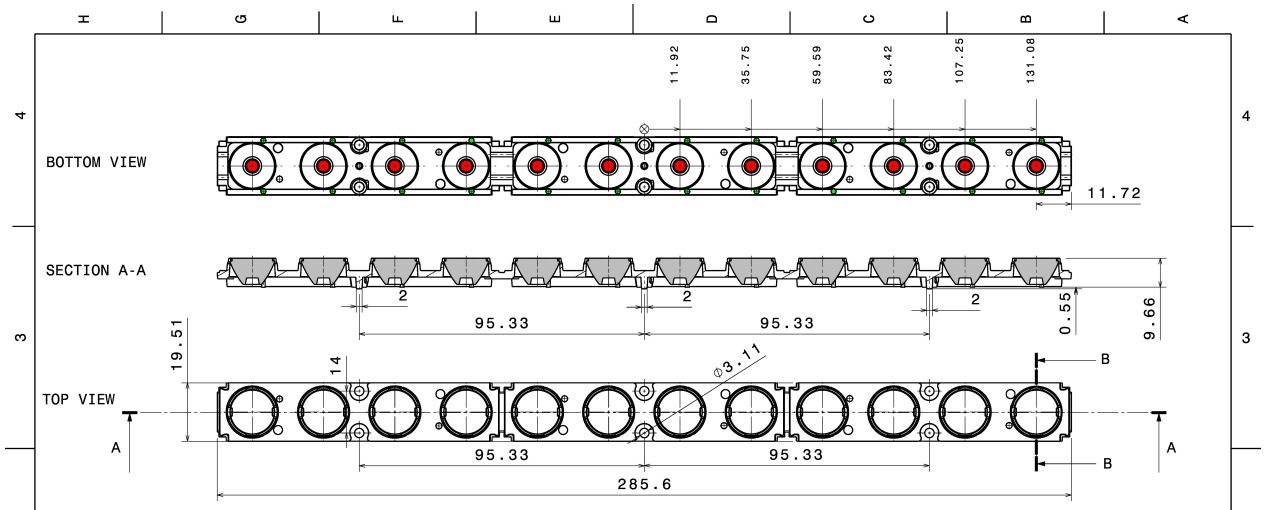





COMPONENTS

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C14445	FLORENTINA-HLD	PC	black
2	C11004	TINA2-RS (12 pcs)	PMMA	clear
2	C12336	TINA2-SS (12 pcs)	PMMA	clear
2	C11417	TINA2-XP-D (12 pcs)	PMMA	clear
2	C11005	TINA2-XP-M (12 pcs)	PMMA	clear
2	F10835	TINA2-XP-W (12 pcs)	PMMA	clear
2	F11007	TINA-WW (12 pcs)	PMMA	clear
2	C11050	TINA2-XP-O (12 pcs)	PMMA	clear
2	C15060	TINA2-O-WAS (12 pcs)	PMMA	clear
2	F16390	TINA-BW (12 pcs)	PMMA	clear

MECHANICAL DRAWING

PRODUCT
Florentina-12x1

LEDiL®

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

SCALE 1:1 | - | A3 SHEET 1/2

Notes

- PCB or Heat Sink level
- Led location see marking.
- Ensure LED fitting, see our web site and/or 3D model for part detail.
- Optional parts can be shown in page2.

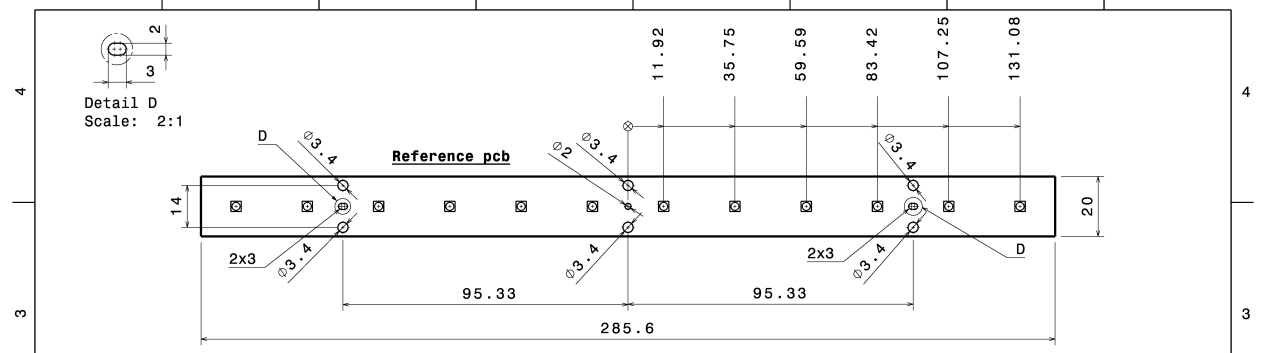

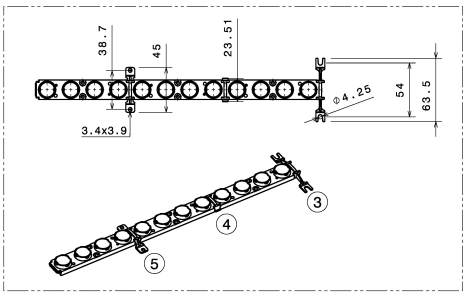

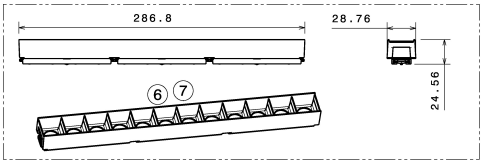

COMPONENTS

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
3	C14353	FLORENCE-1R-CLIP-A	PC	clear
4	C14409	FLORENCE-1R-CLIP-B	PC	clear
5	C14751	FLORENCE-1R-CLIP-C	PC	clear
6	C14446	FLORENTINA-SHD	PC	black
7	C15469	FLORENTINA-SHD-WHT	PC	white

MECHANICAL DRAWING

PRODUCT
Florentina-12x1

LEDiL®

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

SCALE 1:1 | - | A3 SHEET 2/2

Notes

- PCB or Heat Sink level
- Led location see marking.
- Ensure LED fitting, see our web site and/or 3D model for part detail.
- Optional parts can be shown in page2.

See also our general installation guide: www.ledil.com/installation_guide

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

SAMSUNG

LED	LH351B
FWHM / FWTM	Asymmetric
Efficiency	80 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

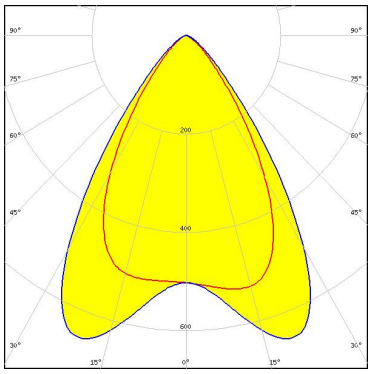

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

LED	JB3030 HE B Class
FWHM / FWTM	Asymmetric
Efficiency	88 %
Peak intensity	1.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C14446_FLORENTINA-SHD	

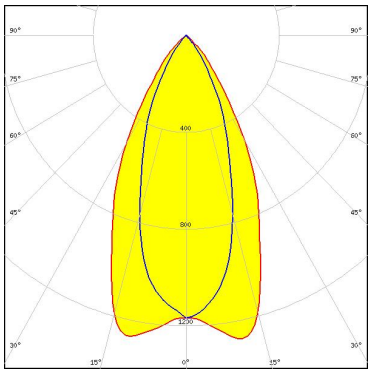

Light distribution files

LED	JB3030 HE B Class
FWHM / FWTM	Asymmetric
Efficiency	91 %
Peak intensity	1.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

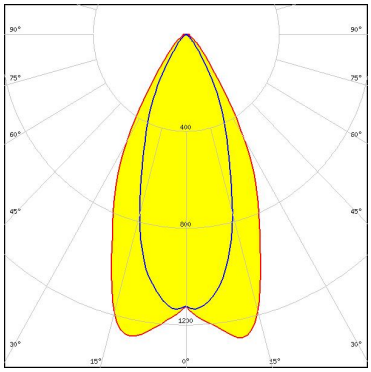

Light distribution files

LED	XD16 Premium
FWHM / FWTM	Asymmetric
Efficiency	91 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

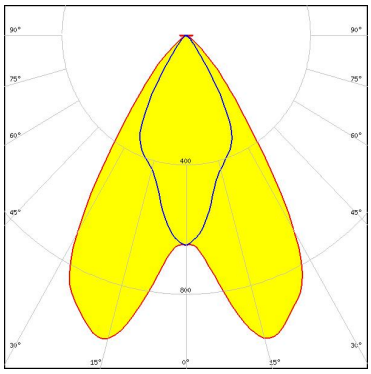

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

CREE LEDs

LED	XP-G3
FWHM / FWTM	Asymmetric
Efficiency	77 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C14446_FLORENTINA-SHD	

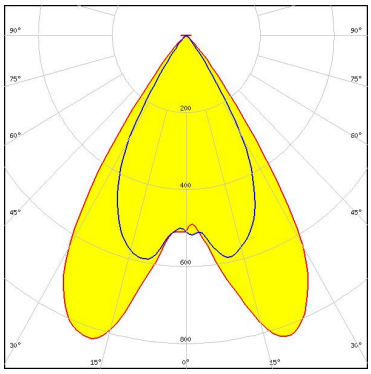

Light distribution files

CREE LEDs

LED	XP-G4
FWHM / FWTM	Asymmetric
Efficiency	78 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C14446_FLORENTINA-SHD	

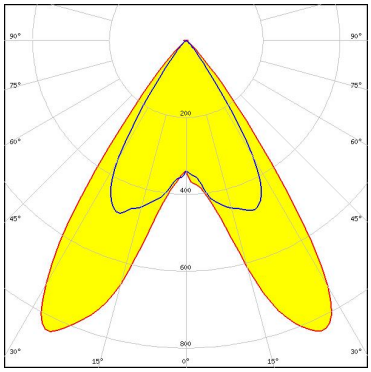

Light distribution files

LUMILEDS

LED	LUXEON HL2X
FWHM / FWTM	Asymmetric
Efficiency	87 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

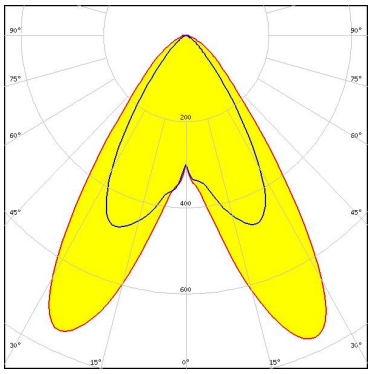

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

NICHIA

LED	NCSxE17A
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C14446_FLORENTINA-SHD	

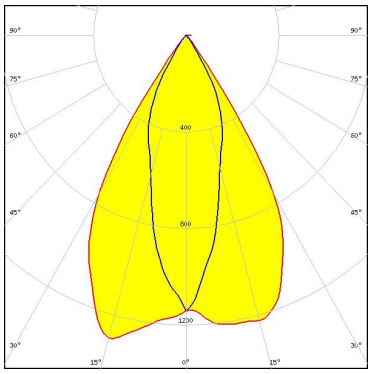

Light distribution files

NICHIA

LED	NVSxE21A
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C14446_FLORENTINA-SHD	

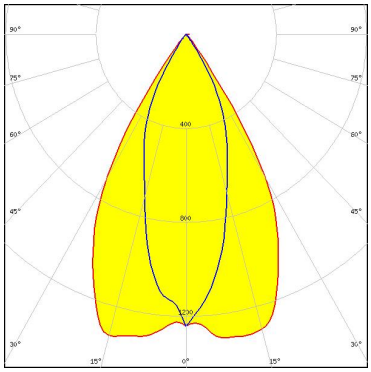

Light distribution files

OSRAM
Opto Semiconductors

LED	OSLON Square CSSRM2/CSSRM3
FWHM / FWTM	Asymmetric
Efficiency	78 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C14446_FLORENTINA-SHD	

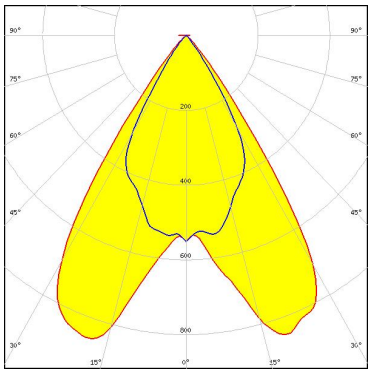

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors

LED	OSLON Square EC
FWHM / FWTM	Asymmetric
Efficiency	88 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

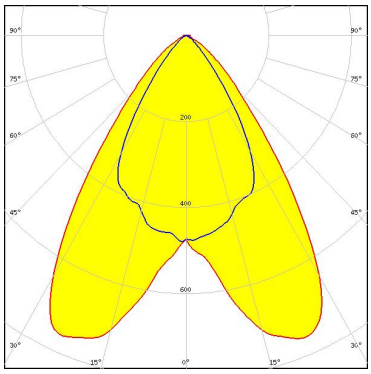

Light distribution files

OSRAM
Opto Semiconductors

LED	OSLON SSL 150
FWHM / FWTM	Asymmetric
Efficiency	82 %
Peak intensity	1.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C14446_FLORENTINA-SHD	

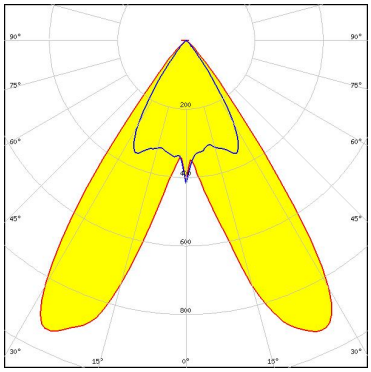

Light distribution files

OSRAM
Opto Semiconductors

LED	OSLON SSL 80
FWHM / FWTM	Asymmetric
Efficiency	79 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C14446_FLORENTINA-SHD	

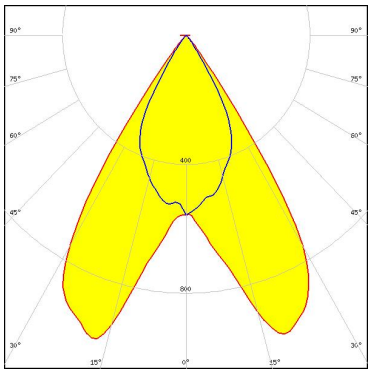

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED	LH351B
FWHM / FWTM	Asymmetric
Efficiency	76 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C14446_FLORENTINA-SHD	

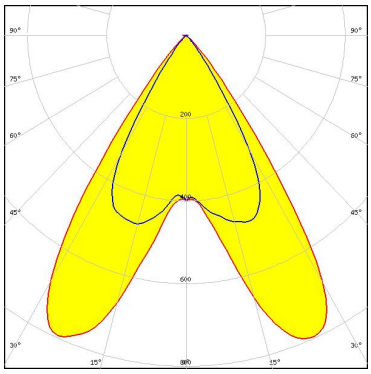

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy
Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.
228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.
405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support
www.ledil.com/where_to_buy

Shipping locations
Poznan, Poland
Hong Kong, China

Distribution Partners
www.ledil.com/where_to_buy

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.