

## OLGA-RS

~5° spot beam with flange. Optimized for high-power 3535 size LED packages.



### SPECIFICATION:


Dimensions	Ø 29.7
Height	18.4 mm
ROHS compliant	yes 

### MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
OLGA-RS	Single lens	PMMA	clear		

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C16671_OLGA-RS	792	132	66	7.3
» Box size: 476 x 273 x 292 mm				

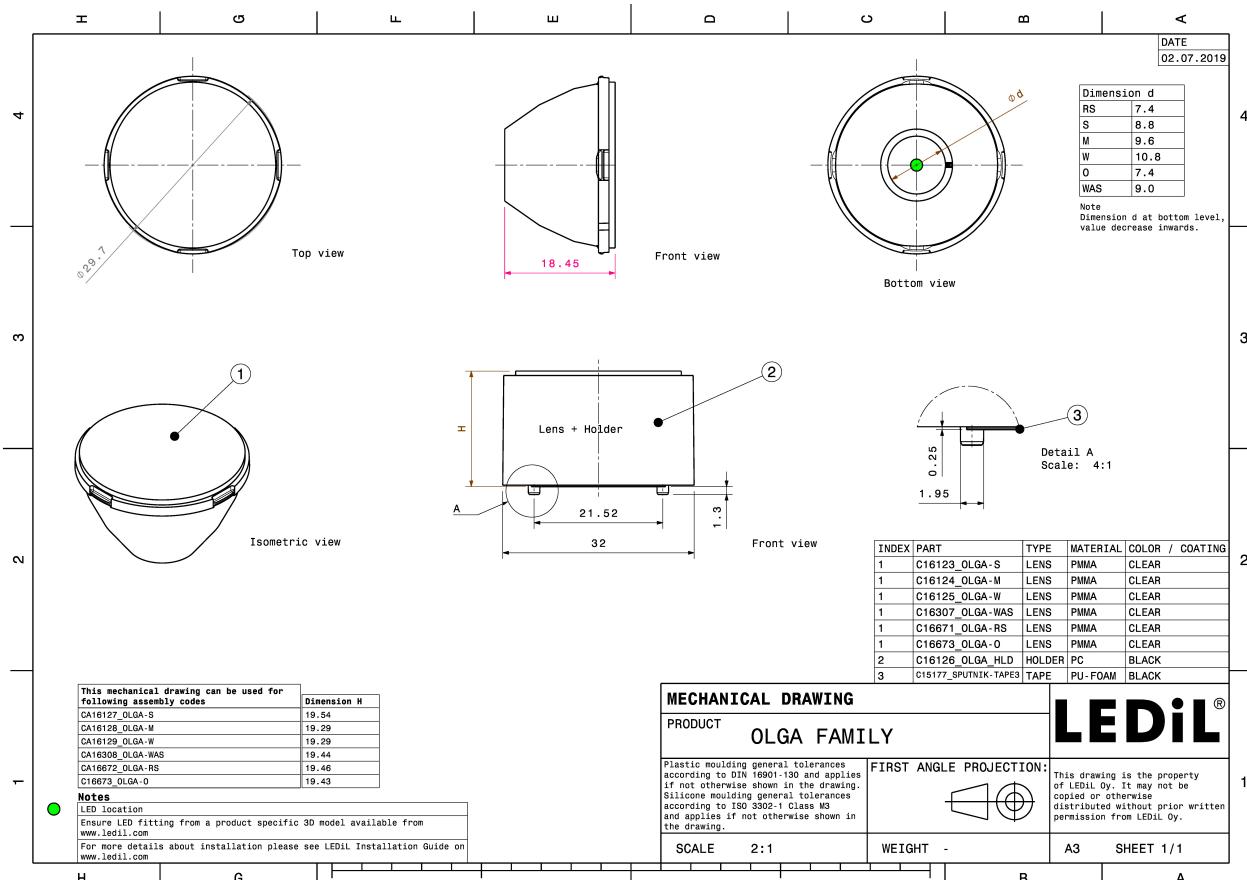


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

## OPTICAL RESULTS (MEASURED):




**LED** Vesta TW 6mm DP  
**FWHM / FWTM** 16.0° / 51.0°  
**Efficiency** 85 %  
**Peak intensity** 3.8 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

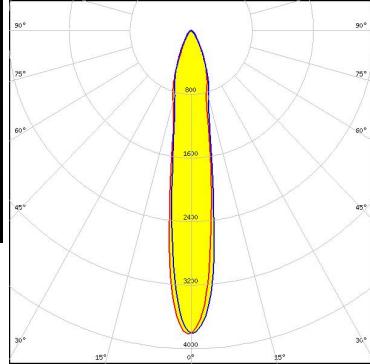

Light distribution files

## CITIZEN


**LED** CLU7B2  
**FWHM / FWTM** 9.0° / 31.0°  
**Efficiency** 84 %  
**Peak intensity** 10.3 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

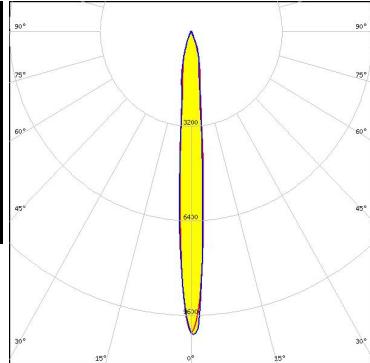

Light distribution files

## CITIZEN

**LED** CLU7L3  
**FWHM / FWTM** 7.0° / 29.0°  
**Efficiency** 89 %  
**Peak intensity** 13.3 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

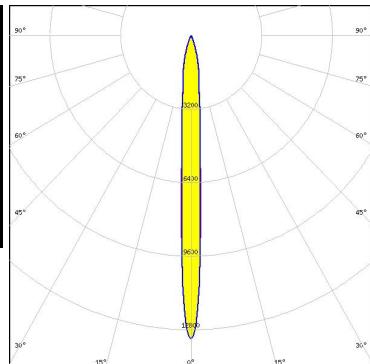


Light distribution files

## OPTICAL RESULTS (MEASURED):

### CITIZEN


LED CLU7R3  
FWHM / FWTM 12.0° / 41.0°  
Efficiency 87 %  
Peak intensity 6.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

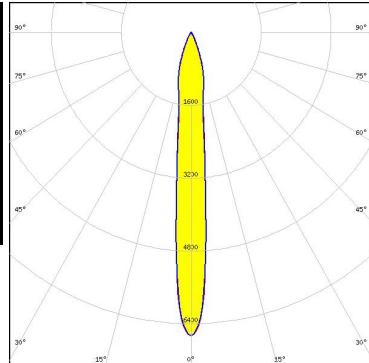

Light distribution files

### CITIZEN


LED CLU7S3  
FWHM / FWTM 10.0° / 37.0°  
Efficiency 93 %  
Peak intensity 9.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

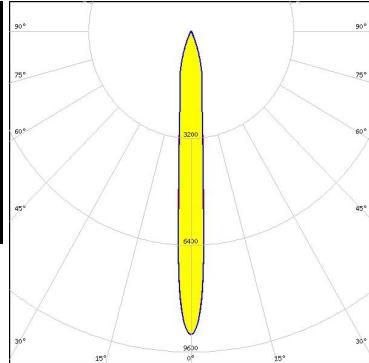

Light distribution files

### CREE LEDs

LED XHP35 HD  
FWHM / FWTM 13.0° / 29.0°  
Efficiency 84 %  
Peak intensity 9.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

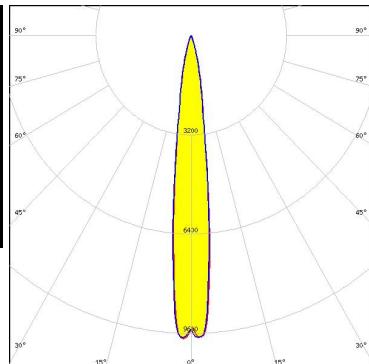


Light distribution files

## OPTICAL RESULTS (MEASURED):




LED XP-E2  
FWHM / FWTM 5.0° / 12.0°  
Efficiency 86 %  
Peak intensity 50.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

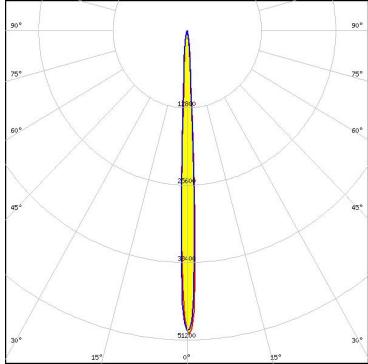

Light distribution files




LED XP-L2  
FWHM / FWTM 12.0° / 29.0°  
Efficiency 83 %  
Peak intensity 10.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

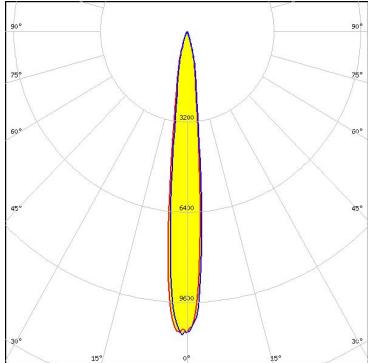

Light distribution files



LED OSCONIQ P 3737 (3W version)  
FWHM / FWTM 10.0° / 25.0°  
Efficiency 85 %  
Peak intensity 14.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

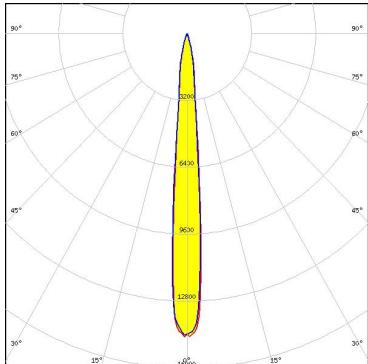


Light distribution files

## OPTICAL RESULTS (MEASURED):

### OSRAM

Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM 7.0° / 17.0°  
Efficiency 86 %  
Peak intensity 26.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

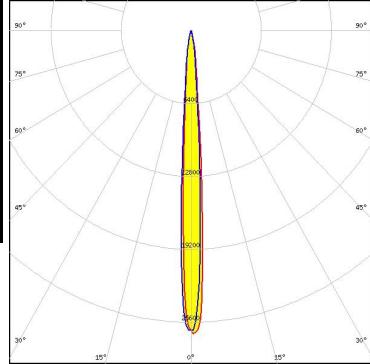

Light distribution files

### SAMSUNG

LED LH351D  
FWHM / FWTM 12.0° / 26.0°  
Efficiency 86 %  
Peak intensity 12.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

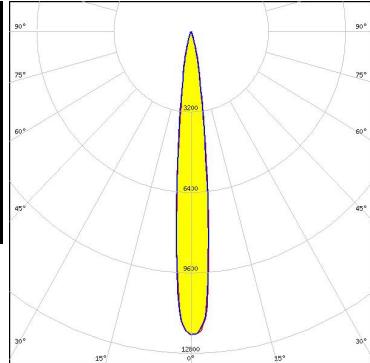


Light distribution files

## OPTICAL RESULTS (SIMULATED):




**LED** V3 HD Gen 8  
**FWHM / FWTM** 14.0° / 26.0°  
**Efficiency** 96 %  
**Peak intensity** 13 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

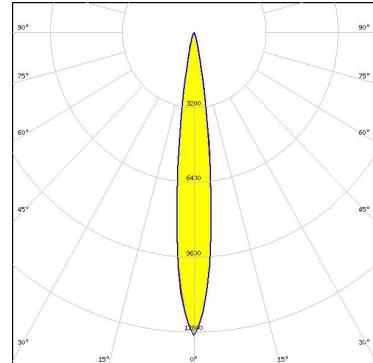

Light distribution files




**LED** V4 HD Gen 7  
**FWHM / FWTM** 16.0° / 31.0°  
**Efficiency** 96 %  
**Peak intensity** 9.1 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

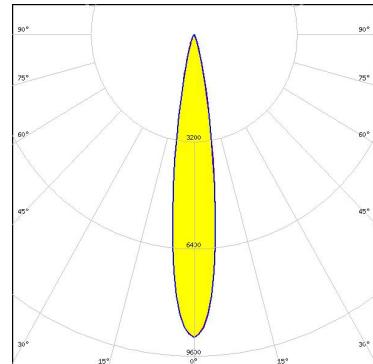

Light distribution files



**LED** V6 HD Gen 7  
**FWHM / FWTM** 18.0° / 46.0°  
**Efficiency** 93 %  
**Peak intensity** 5.1 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

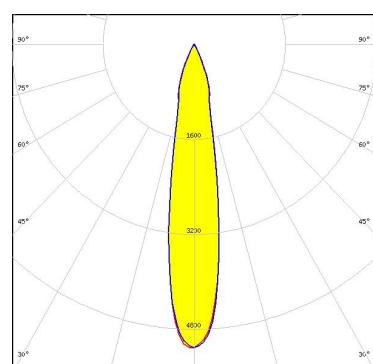


Light distribution files

## OPTICAL RESULTS (SIMULATED):

### CITIZEN


LED CLU7A2/7A3  
 FWHM / FWTM 12.0° / 27.0°  
 Efficiency 91 %  
 Peak intensity 13 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

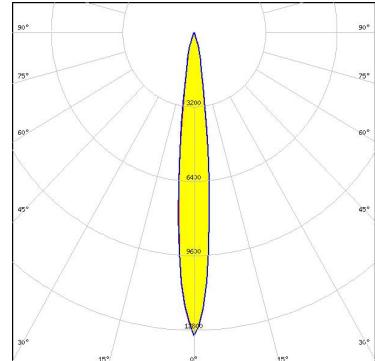

Light distribution files

### CREE LEDs


LED CMA1303  
 FWHM / FWTM 16.0° / 30.0°  
 Efficiency 95 %  
 Peak intensity 9.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

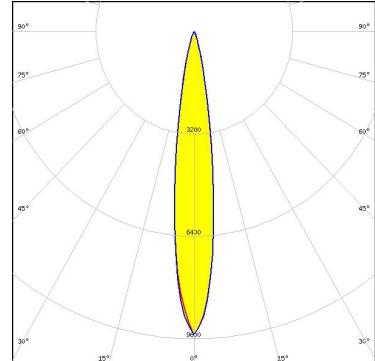

Light distribution files

### CREE LEDs

LED CXA/B 13xx  
 FWHM / FWTM 18.0° / 45.0°  
 Efficiency 89 %  
 Peak intensity 4.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

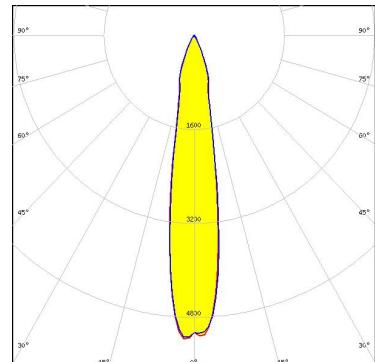


Light distribution files

## OPTICAL RESULTS (SIMULATED):




LED XHP35 HI  
 FWHM / FWTM 10.0° / 20.0°  
 Efficiency 96 %  
 Peak intensity 23.2 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

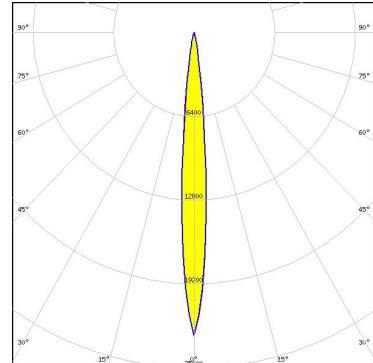

Light distribution files




LED CXM-3  
 FWHM / FWTM 12.0° / 26.0°  
 Efficiency 96 %  
 Peak intensity 14 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

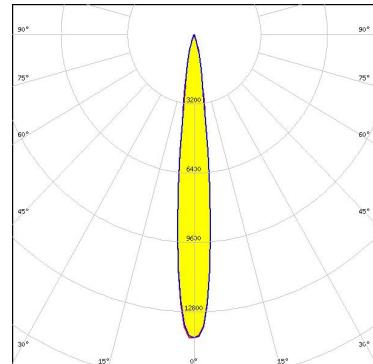

Light distribution files



LED CXM-4  
 FWHM / FWTM 14.0° / 38.0°  
 Efficiency 96 %  
 Peak intensity 8.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

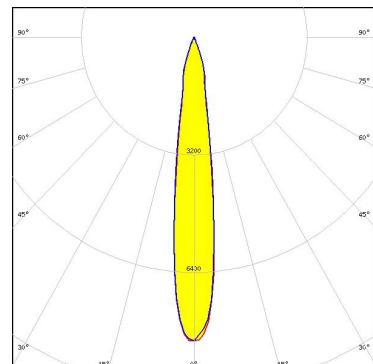


Light distribution files

## OPTICAL RESULTS (SIMULATED):

**XICATO**

LED XOB 6 mm  
FWHM / FWTM 18.0° / 46.0°  
Efficiency 94 %  
Peak intensity 5.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

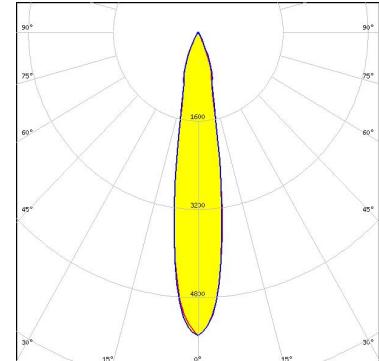

Light distribution files

## GENERAL INFORMATION:

**NOTE:** The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

## MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

## PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

**LEDiL Oy**  
Joensuunkatu 7  
FI-24100 SALO  
Finland

**LEDiL Inc.**  
228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

**Ledil Optics Technology  
(Shenzhen) Co., Ltd.**  
# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

**Local sales and technical  
support**  
[www.ledil.com/](http://www.ledil.com/)  
where\_to\_buy

**Shipping locations**  
Poznan, Poland  
Hong Kong, China

**Distribution Partners**  
[www.ledil.com/](http://www.ledil.com/)  
where\_to\_buy