

AMY-110-WW

~60° wide beam

SPECIFICATION:

Dimensions	Ø 109.7
Height	17.1 mm
Fastening	socket
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
AMY-110-WW	Single lens	PMMA	clear		
AMY-110-HLD-C	Holder C	PC	black		
AMY-110-HLD-B	Holder B	PC	black		
AMY-110-HLD-C-WHT	Holder C	PC	white		
AMY-110-HLD-B-WHT	Holder B	PC	white		



ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C18570_AMY-110-WW	128	128	8	12.1
Assembly				
CP19035_AMY-110-WW-B-WHT	77	77	7	9.3
CP19031_AMY-110-WW-C-WHT	77	77	7	9.3
CP18578_AMY-110-WW-B	77	77	7	9.4
CP18574_AMY-110-WW-C	77	77	7	9.3


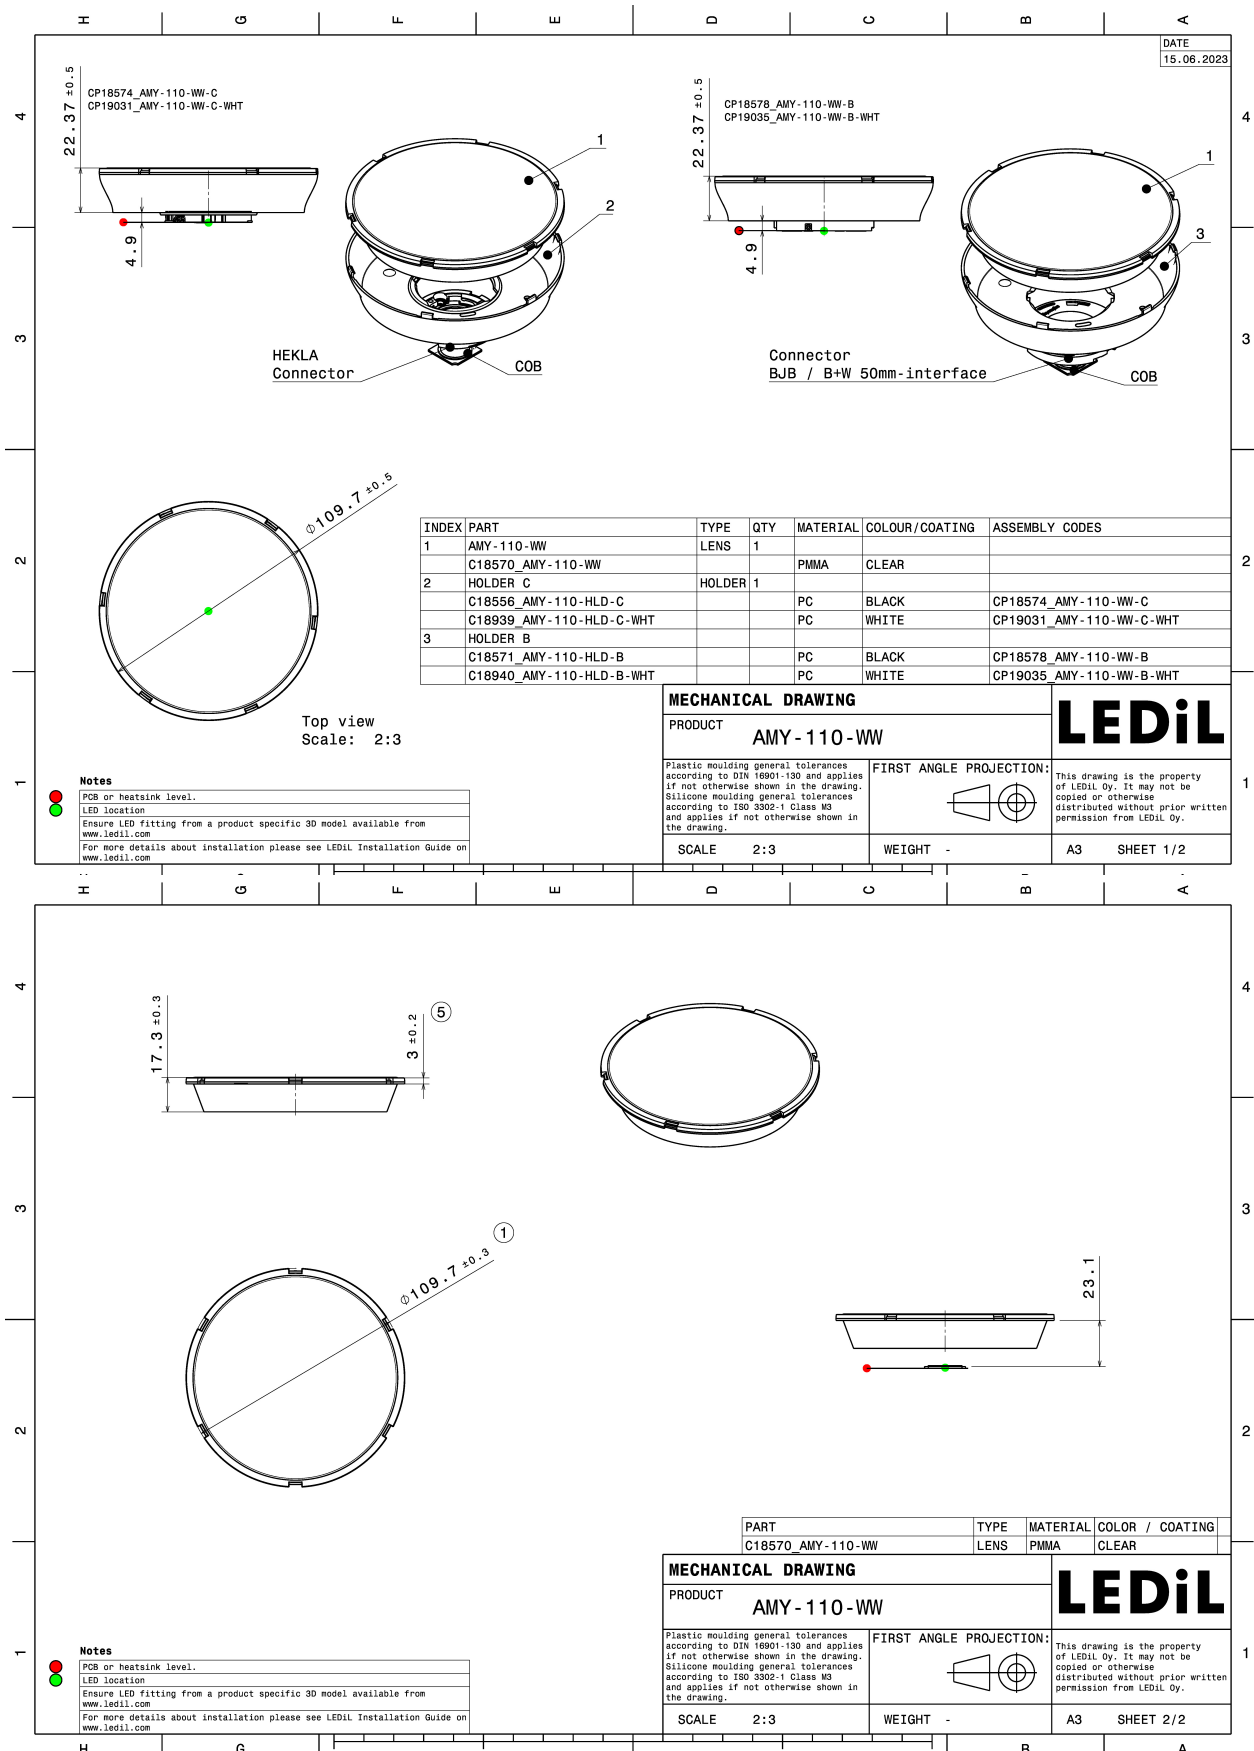


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):





LED BXR-V-D10-RGBW2000-A3
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 56.0° / 80.0°
 Efficiency 75 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 28
 Light colour/type RGBW
 Required components:
 C19950_HEKLA-SOCKET-RZ

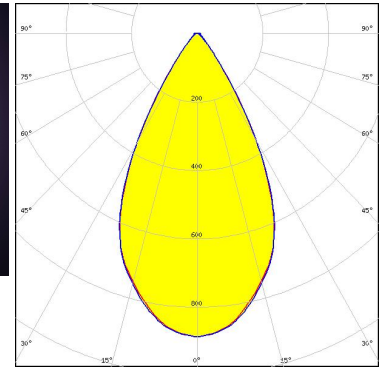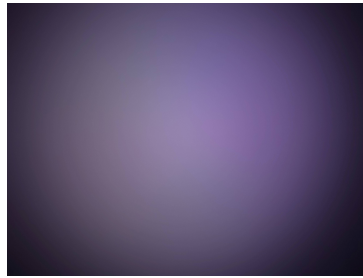

Light distribution files





LED CTM-14 (Tunable White) Gen2
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 57.0° / 81.0°
 Efficiency 86 %
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 442 Typ L8

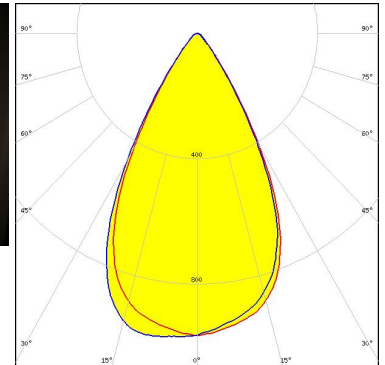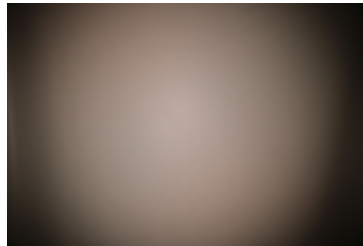

Light distribution files



LED LC016D / LC019D / LC026D / LC033D
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 60.0° / 84.0°
 Efficiency 87 %
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17438_HEKLA-G2-I

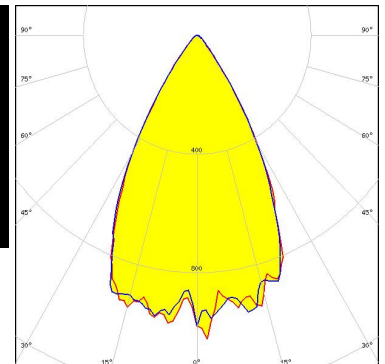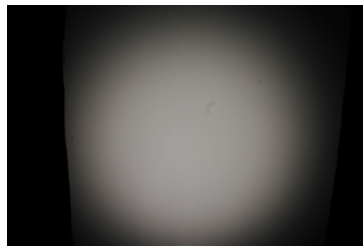


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED V10 Gen 8-9
Ordering code CP18574_AMY-110-WW-C
FWHM / FWTM 53.0° / 78.0°
Efficiency 89 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
 F15255_HEKLA-SOCKET-C

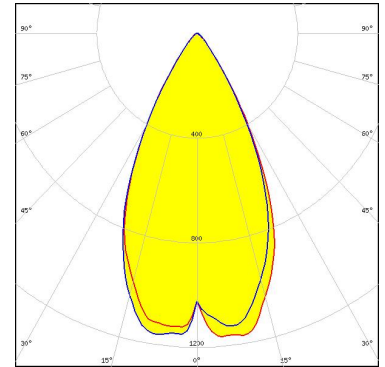

Light distribution files




LED V11 HD Gen 8
Ordering code CP18574_AMY-110-WW-C
FWHM / FWTM 55.0° / 78.0°
Efficiency 88 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
 F15859_HEKLA-SOCKET-I

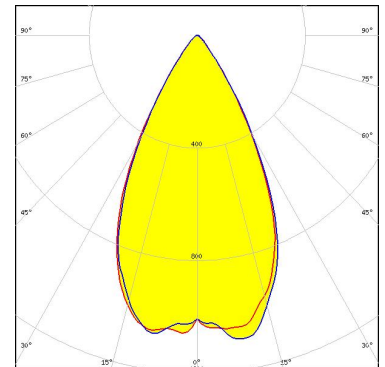

Light distribution files



LED V13 Gen 8-9
Ordering code CP18574_AMY-110-WW-C
FWHM / FWTM 57.0° / 80.0°
Efficiency 88 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
 F15859_HEKLA-SOCKET-I

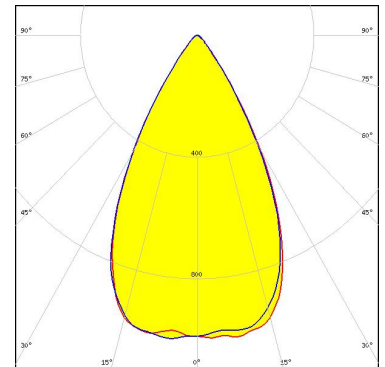


Light distribution files

OPTICAL RESULTS (SIMULATED):



LED V18 Gen 8-9
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 60.0° / 84.0°
 Efficiency 82 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C16142_HEKLA-SOCKET-K

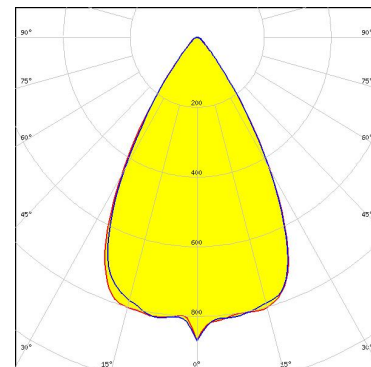


Light distribution files

Bender Wirth: 462 Typ L8



LED V22 Gen 8-9
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 60.0° / 85.0°
 Efficiency 79 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

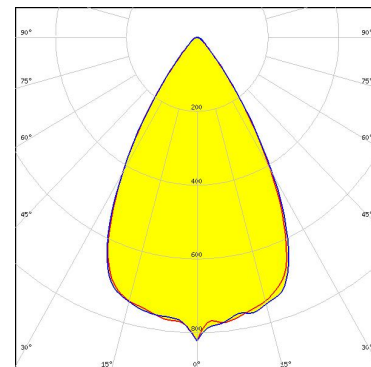


Light distribution files

Bender Wirth: 631b Hekla XL



LED V8 Gen 8-9
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 50.0° / 75.0°
 Efficiency 89 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F15253_HEKLA-SOCKET-A

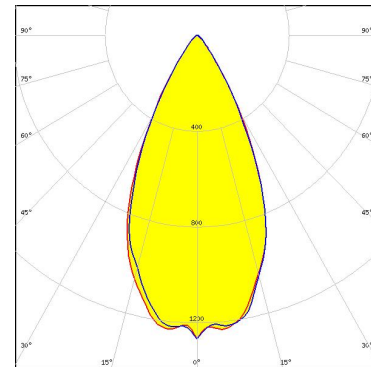


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED V9 HD Gen 8
Ordering code CP18574_AMY-110-WW-C
FWHM / FWTM 53.0° / 77.0°
Efficiency 88 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
 F15859_HEKLA-SOCKET-I

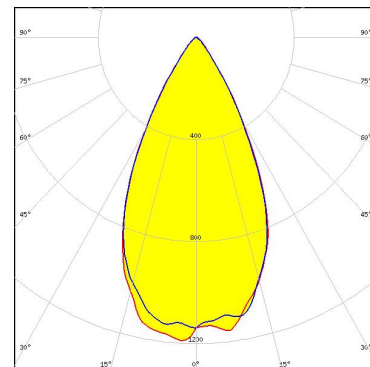

Light distribution files




LED Vero SE 29
Ordering code CP19031_AMY-110-WW-C-WHT
FWHM / FWTM 63.0° / 95.0°
Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

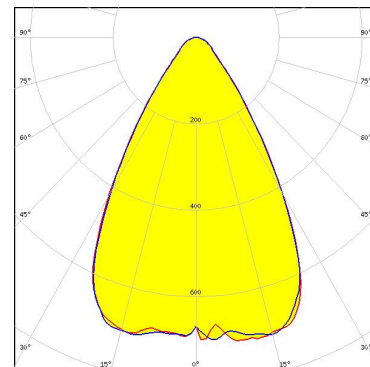

Light distribution files



LED Vero SE 29
Ordering code CP18574_AMY-110-WW-C
FWHM / FWTM 62.0° / 88.0°
Efficiency 76 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

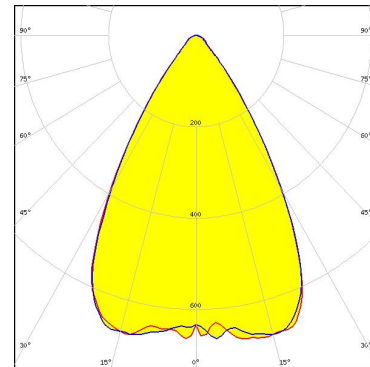


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED VERO13
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 58.0° / 82.0°
 Efficiency 89 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C16142_HEKLA-SOCKET-K

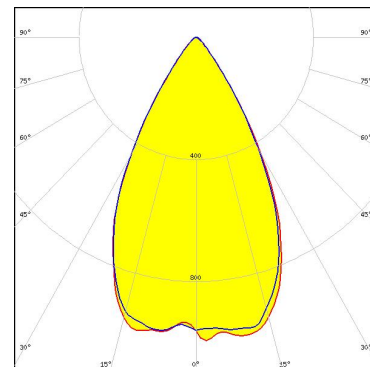

Light distribution files




LED VERO18
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 64.0° / 86.0°
 Efficiency 87 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C16142_HEKLA-SOCKET-K

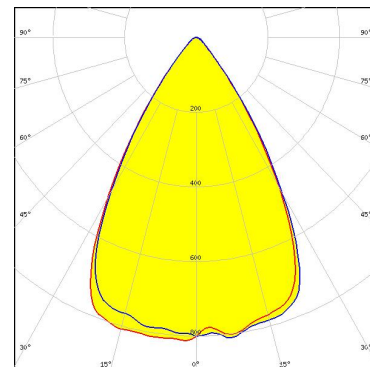

Light distribution files



LED Vesta DTW 13mm (21W)
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 51.0° / 76.0°
 Efficiency 89 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

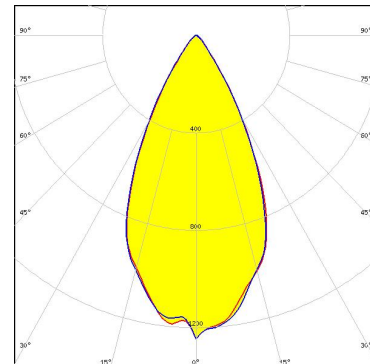

Light distribution files

Bender Wirth: 632b Hekla XL


OPTICAL RESULTS (SIMULATED):



LED Vesta DTW 9mm (4W/6W/12W)
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 51.0° / 76.0°
 Efficiency 89 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Bender Wirth: 652b Hekla


Light distribution files

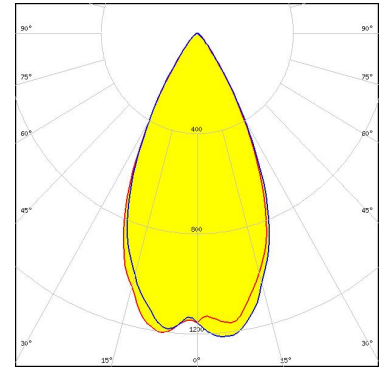

LED Vesta SE 13mm TW
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 50.0° / 74.0°
 Efficiency 83 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:

C16142_HEKLA-SOCKET-K


Light distribution files

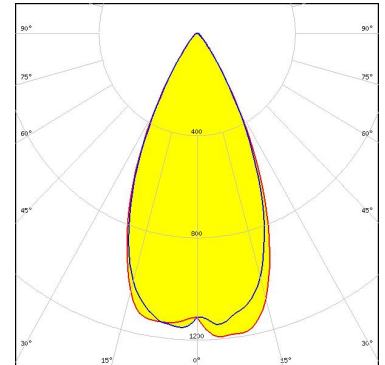

LED Vesta TW 18mm (31W) DP
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 59.0° / 82.0°
 Efficiency 82 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

C16142_HEKLA-SOCKET-K

Light distribution files

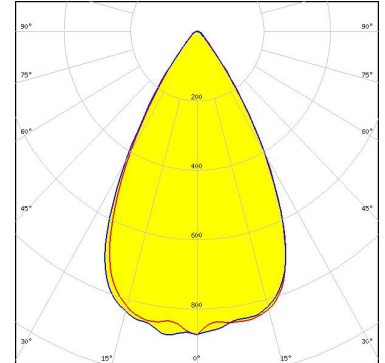


Bender Wirth: 483 Typ L8

OPTICAL RESULTS (SIMULATED):



LED Vesta TW 9mm (9W) DP
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 58.0° / 82.0°
 Efficiency 89 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C16142_HEKLA-SOCKET-K

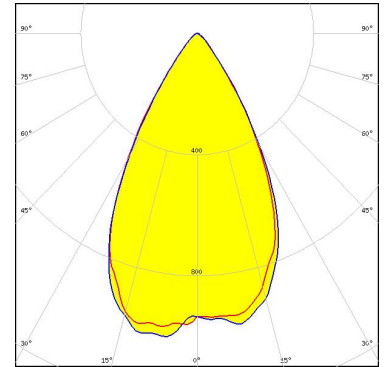


Light distribution files

Bender Wirth: 489 Typ L8

CITIZEN


LED CLU03x
 Ordering code CP19031_AMY-110-WW-C-WHT
 FWHM / FWTM 57.0° / 81.0°
 Efficiency 94 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17438_HEKLA-G2-I

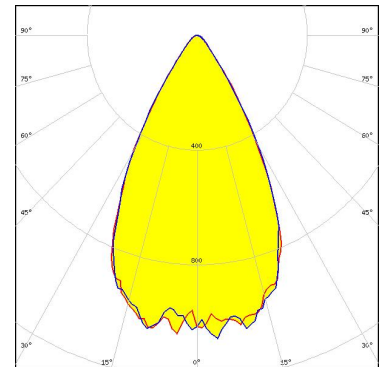

Light distribution files

CITIZEN

LED CLU03x
 Ordering code C18570_AMY-110-WW
 FWHM / FWTM 56.0° / 80.0°
 Efficiency 87 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17438_HEKLA-G2-I

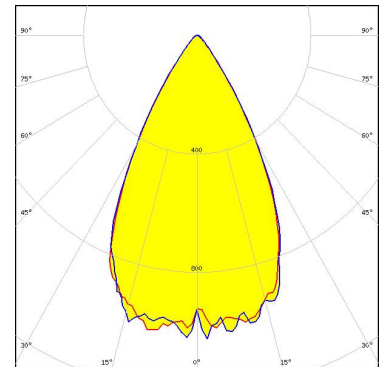


Light distribution files

OPTICAL RESULTS (SIMULATED):

CITIZEN

LED CLU03x
 Ordering code CP18578_AMY-110-WW-B
 FWHM / FWTM 56.0° / 78.0°
 Efficiency 89 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

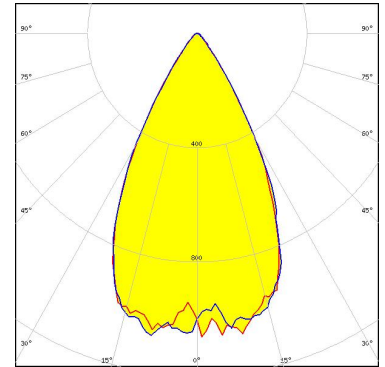


BJB: 47.319.2021

Light distribution files

CITIZEN

LED CLU03x
 Ordering code CP19035_AMY-110-WW-B-WHT
 FWHM / FWTM 56.0° / 80.0°
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

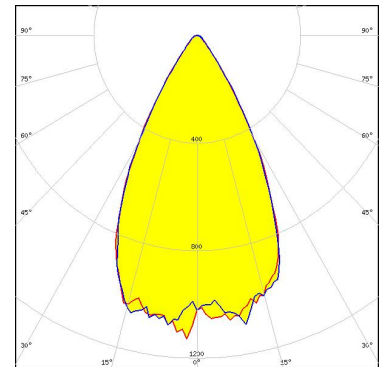


BJB: 47.319.2021

Light distribution files

CITIZEN

LED CLU03x
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 56.0° / 80.0°
 Efficiency 87 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17438_HEKLA-G2-I

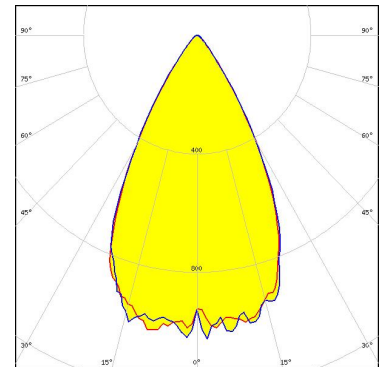

Light distribution files


OPTICAL RESULTS (SIMULATED):

CITIZEN

LED CLU04x
 Ordering code C18570_AMY-110-WW
 FWHM / FWTM 60.0° / 83.0°
 Efficiency 85 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

BJB: 47.319.2030

Light distribution files

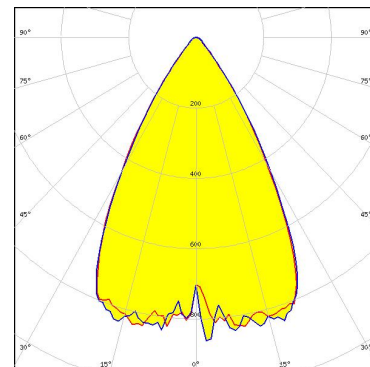


CITIZEN

LED CLU04x
 Ordering code CP18578_AMY-110-WW-B
 FWHM / FWTM 60.0° / 83.0°
 Efficiency 85 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

BJB: 47.319.2030

Light distribution files

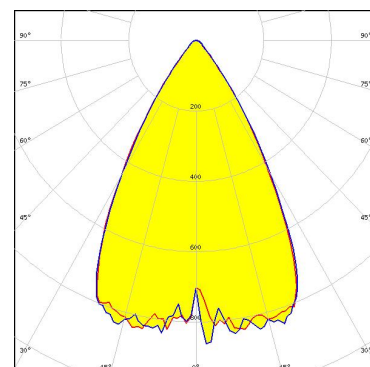


CITIZEN

LED CLU04x
 Ordering code CP19035_AMY-110-WW-B-WHT
 FWHM / FWTM 60.0° / 85.0°
 Efficiency 93 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

BJB: 47.319.2030


Light distribution files

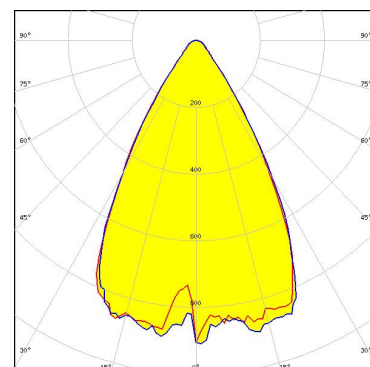

OPTICAL RESULTS (SIMULATED):



LED CMA1840
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 58.0° / 80.0°
 Efficiency 86 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

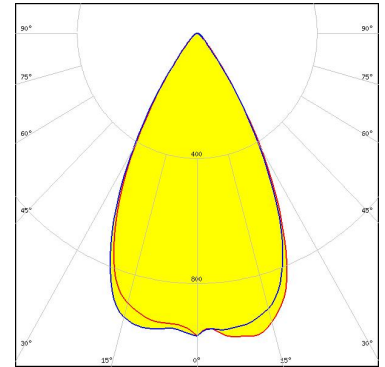


Bender Wirth: 637a Hekla

Light distribution files



LED CMA2550
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 62.0° / 85.0°
 Efficiency 82 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

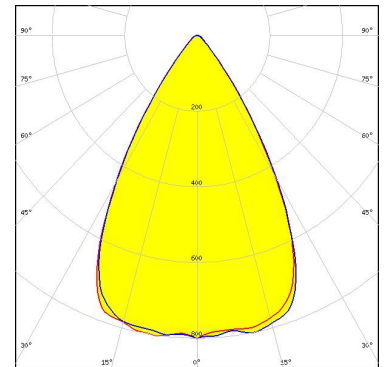


Bender Wirth: 639a Hekla XL

Light distribution files



LED CMB1818-25
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 56.0° / 78.0°
 Efficiency 87 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

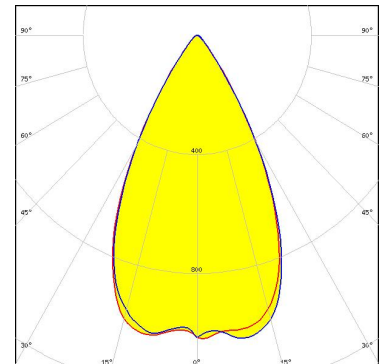


Bender Wirth: 637a Hekla

Light distribution files

OPTICAL RESULTS (SIMULATED):



LED CMU22xx
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 64.0° / 88.0°
 Efficiency 77 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


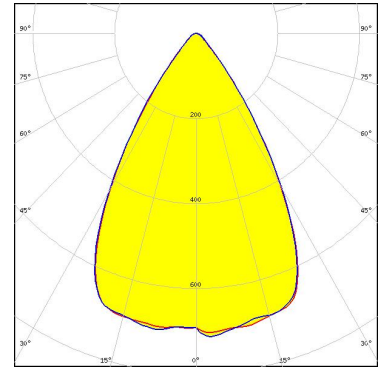


Bender Wirth: 631b Hekla XL

Light distribution files



LED CTW0910
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 52.0° / 76.0°
 Efficiency 87 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 C16142_HEKLA-SOCKET-K

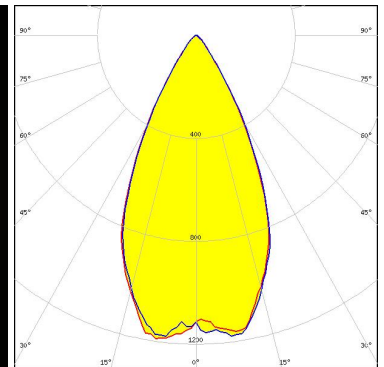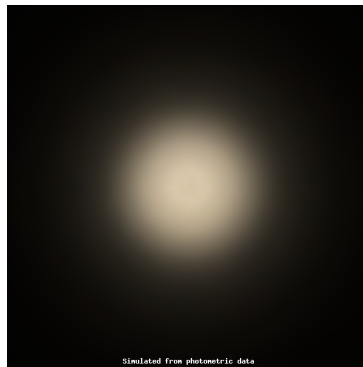


Bender Wirth: 512 Typ L8

Light distribution files



LED LUXEON CX Plus CoB L08 (Gen2)
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 56.0° / 80.0°
 Efficiency 88 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

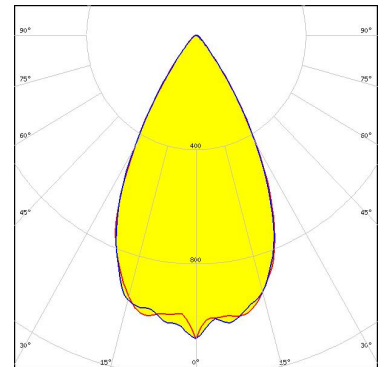


Bender Wirth: 637a Hekla

Light distribution files

OPTICAL RESULTS (SIMULATED):



LED LUXEON CoB 1204/1205
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 56.0° / 78.0°
 Efficiency 89 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

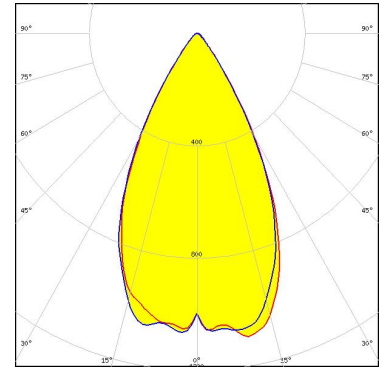


Bender Wirth: 632a Hekla XL

Light distribution files



LED LUXEON CoB 1208
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 56.0° / 80.0°
 Efficiency 88 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

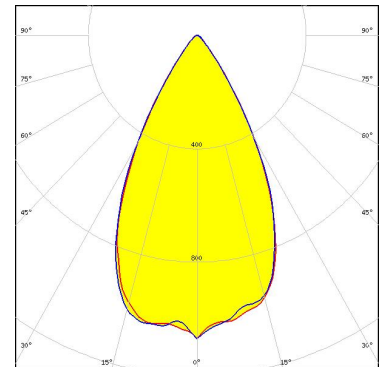


Bender Wirth: 632a Hekla XL

Light distribution files



LED LUXEON CoB 1211
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 62.0° / 86.0°
 Efficiency 86 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

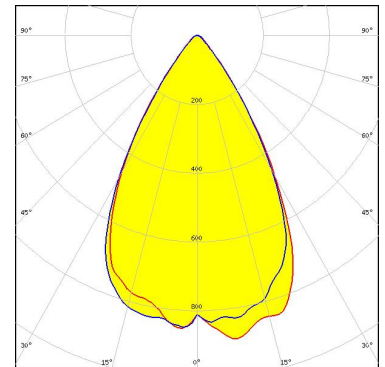

Bender Wirth: 631b Hekla XL


Light distribution files

OPTICAL RESULTS (SIMULATED):



LED LUXEON CoB 1213/1216/1812
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 68.0° / 92.0°
 Efficiency 79 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


Bender Wirth: 631b Hekla XL

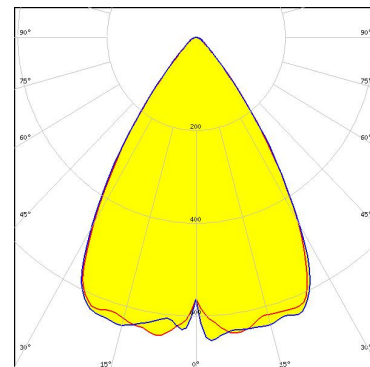

Light distribution files




LED LUXEON CX Plus CoB L04 / L05 (Gen2)
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 55.0° / 78.0°
 Efficiency 88 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F15254_HEKLA-SOCKET-B

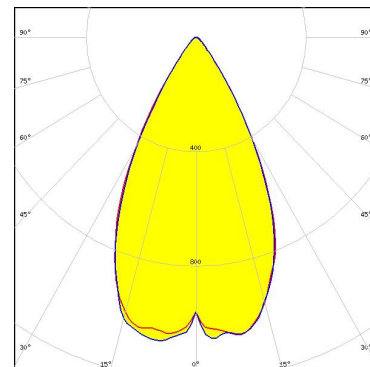

Light distribution files



LED COB J-Type
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 55.0° / 80.0°
 Efficiency 88 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

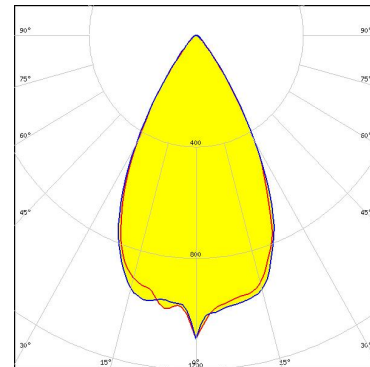


Bender Wirth: 663a Hekla XL

Light distribution files

OPTICAL RESULTS (SIMULATED):




LED NF1206JLC-V5
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 58.0° / 80.0°
 Efficiency 87 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17438_HEKLA-G2-I

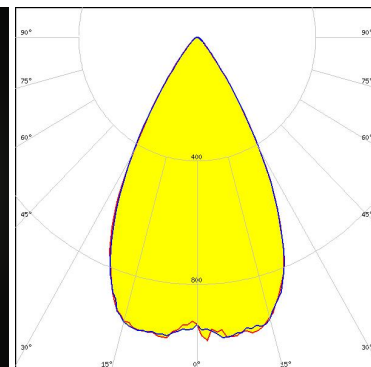

Light distribution files

SAMSUNG

LED LC016D / LC019D / LC026D / LC033D
 Ordering code CP19035_AMY-110-WW-B-WHT
 FWHM / FWTM 56.0° / 80.0°
 Efficiency 94 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

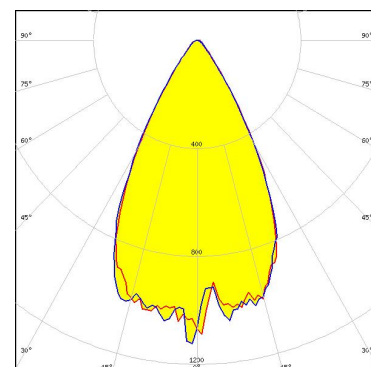


BJB: 47.319.2021

Light distribution files

SAMSUNG

LED LC016D / LC019D / LC026D / LC033D
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 58.0° / 80.0°
 Efficiency 87 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17438_HEKLA-G2-I

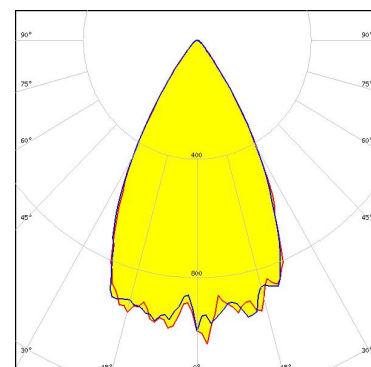


Light distribution files

OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LC016D / LC019D / LC026D / LC033D
 Ordering code CP19031_AMY-110-WW-C-WHT
 FWHM / FWTM 57.0° / 81.0°
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17438_HEKLA-G2-I

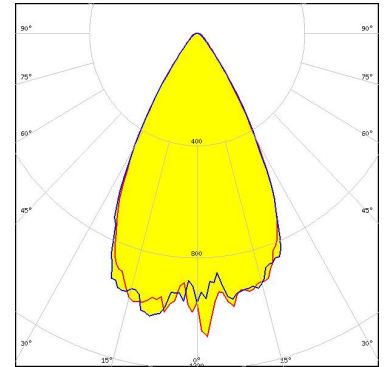

Light distribution files

SAMSUNG


LED LC016D / LC019D / LC026D / LC033D
 Ordering code C18570_AMY-110-WW
 FWHM / FWTM 57.0° / 80.0°
 Efficiency 87 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17438_HEKLA-G2-I

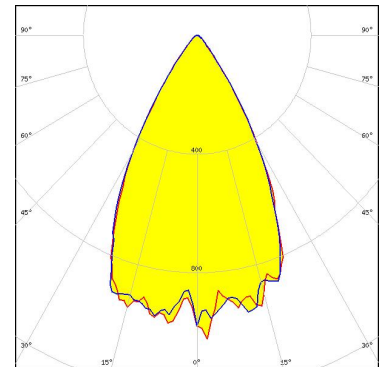

Light distribution files

SAMSUNG

LED LC016D / LC019D / LC026D / LC033D
 Ordering code CP18578_AMY-110-WW-B
 FWHM / FWTM 56.0° / 79.0°
 Efficiency 88 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

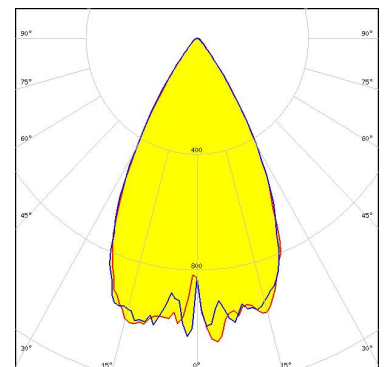


Light distribution files

BJB: 47.319.2021

OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED LC020T (Tunable white)
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 54.0° / 78.0°
 Efficiency 88 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 C16142_HEKLA-SOCKET-K

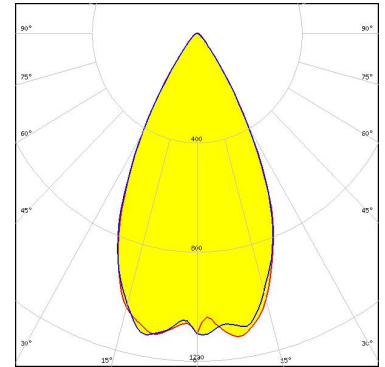


Light distribution files

Bender Wirth: 501 Typ L8

SAMSUNG

LED LC040D / LC060D / LC080D
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 66.0° / 90.0°
 Efficiency 78 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

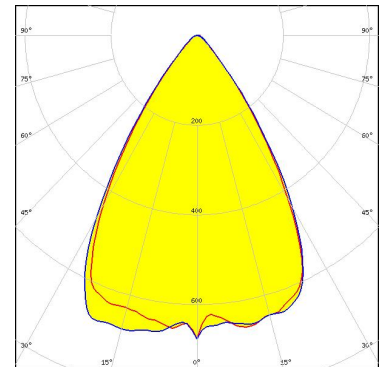


Light distribution files

Bender Wirth: 631b Hekla XL



LED MJT COB LES 14.5
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 56.0° / 80.0°
 Efficiency 88 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F15859_HEKLA-SOCKET-I

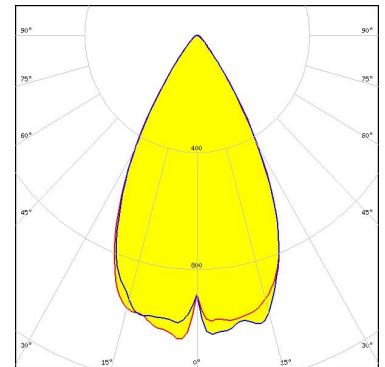

Light distribution files


OPTICAL RESULTS (SIMULATED):



LED MJT COB LES 22
 Ordering code CP18578_AMY-110-WW-B
 FWHM / FWTM 61.0° / 84.0°
 Efficiency 87 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

BJB: 47.319.2030


Light distribution files

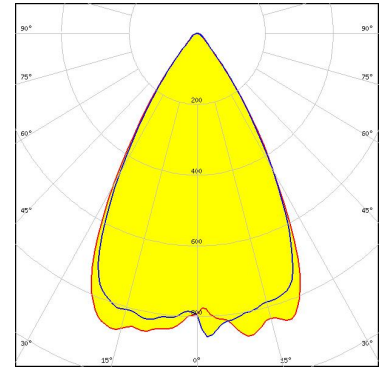

TRIDONIC

LED SLE 21mm 5000lm xxx H ADV8
 Ordering code CP18578_AMY-110-WW-B
 FWHM / FWTM 58.0° / 80.0°
 Efficiency 83 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Light distribution files

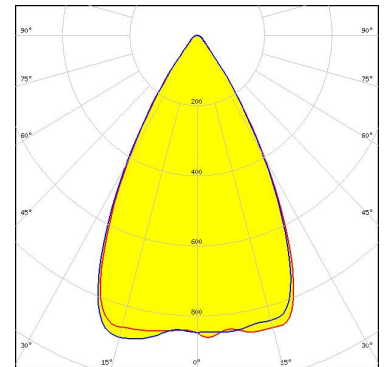


TRIDONIC

LED SLE 21mm 6000lm xxx R ADV8
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 65.0° / 88.0°
 Efficiency 80 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Bender Wirth: 631b Hekla XL


Light distribution files

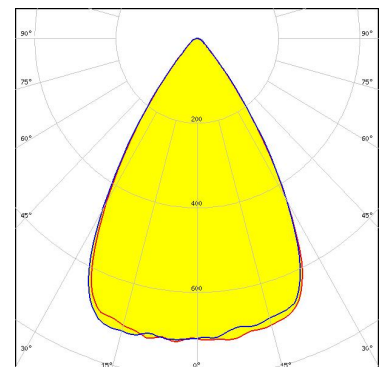

OPTICAL RESULTS (SIMULATED):

TRIDONIC


LED SLE G7 LES13
 Ordering code CP18574_AMY-110-WW-C
 FWHM / FWTM 57.0° / 79.0°
 Efficiency 87 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17438_HEKLA-G2-I

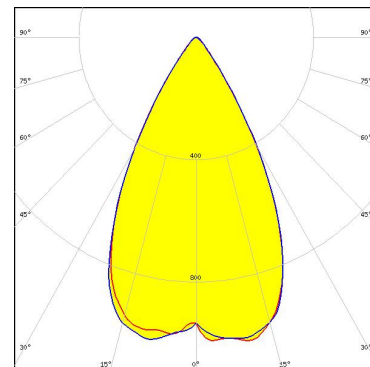

Light distribution files

TRIDONIC

LED SLE G7 LES13 H
 Ordering code CP18578_AMY-110-WW-B
 FWHM / FWTM 51.0° / 72.0°
 Efficiency 86 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

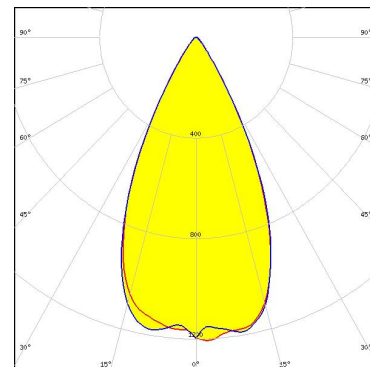

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)