

Extrusion Profiles

RAPID PROTOTYPING AND MANUFACTURING FOR CUSTOM COOLING SOLUTIONS

Aluminum extrusions are the most cost-effective solutions for the majority of electronic cooling applications. ATS offers a wide variety of aluminum profiles used for heat sink fabrication and other aluminum applications. Whether you are seeking a standard extrusion profile or the expertise from our design team to create a totally new and innovative profile, ATS has the capabilities and expertise to meet your requirements.

Extensive Capabilities

From its facilities in Norwood, MA and strategic partnerships throughout Southern China, ATS offers:

- » Design with ATS high performance extrusion profiles to eliminate tooling costs and reduce lead time
- » An extensive inventory of profiles in a wide variety of sizes, ranging from 40.9 - 482.9 mm in width and 9.9 - 72.9 mm in height
- » Custom profiles available upon request to meet your specific requirements, contact ATS at ats-hq@qats.com

- » High performance extrusions with thermal resistance characteristics as low as 0.27°C/W
- » RoHS compliant, aluminum alloy 6063
- » No minimum order quantity (MOQ) permitting you to order the exact quantity you require from prototype builds to high-volume production
- » All extrusion profiles unfinished (degreased) with custom finishes (anodization) available upon request to meet application-specific requirements
- » A wide variety of secondary metal fabrication services through ATS Manufacturing including precision cutting, milling, punching, drilling and notching to meet all your design requirements








Specifications (Parts also available in 1,220 mm lengths)

MPN	L (mm)	W (mm)	H (mm)	# of Fins	MPN	L (mm)	W (mm)	H (mm)	# of Fins	MPN	L (mm)	W (mm)	H (mm)	# of Fins
ATS-EXL1-254-R0	254	100.8	10	40	ATS-EXL72-300-R0	300	40.8	6.6	15	ATS-EXL110-300-R0	300	200	45	23
ATS-EXL2-254-R0	254	100.8	20	40	ATS-EXL73-300-R0	300	45	10	11	ATS-EXL113-300-R0	300	40	30	5
ATS-EXL6-254-R0	254	100.8	27	40	ATS-EXL74-300-R0	300	70	15	28	ATS-EXL114-300-R0	300	80	30	9
ATS-EXL7-248-R0	248	101	14	22	ATS-EXL75-300-R0	300	75.6	18.5	26	ATS-EXL115-300-R0	300	120	30	13
ATS-EXL58-300-R0	300	6	8	3	ATS-EXL76-300-R1	300	93.4	40	28	ATS-EXL116-300-R0	300	51.6	42.5	9
ATS-EXL59-300-R0	300	14	16	6	ATS-EXL77-300-R0	300	120.8	16.6	48	ATS-EXL117-300-R0	300	233.2	12.5	66
ATS-EXL60-300-R0	300	13.9	25.2	3	ATS-EXL78-300-R0	300	146	7.6	24	ATS-EXL118-300-R0	300	50.7	12.3	17
ATS-EXL61-300-R0	300	15	6	6	ATS-EXL84-300-R0	300	70	25	28	ATS-EXL119-300-R0	300	95	14	35
ATS-EXL62-300-R0	300	24.3	17.5	8	ATS-EXL98-300-R0	300	120	36	27	ATS-EXL120-300-R0	300	80	14	26
ATS-EXL63-300-R0	300	25	35	10	ATS-EXL99-300-R0	300	100	34.5	19	ATS-EXL121-300-R0	300	60	14	20
ATS-EXL64-300-R0	300	25	22	10	ATS-EXL100-300-R0	300	130	33.5	26	ATS-EXL122-300-R1	300	87.6	32.8	14
ATS-EXL65-300-R0	300	41	25	6	ATS-EXL101-300-R0	300	152.4	34.6	28	ATS-EXL137-300-R0	300	63.5	10.4	15
ATS-EXL66-300-R0	300	25.4	4	9	ATS-EXL102-300-R0	300	179	27	23	ATS-EXL138-300-R0	300	203.5	19.7	79
ATS-EXL67-300-R0	300	27.5	13.5	10	ATS-EXL103-300-R0	300	115	33.6	23	ATS-EXL142-300-R0	300	104	29	29
ATS-EXL68-300-R0	300	51	25	9	ATS-EXL104-300-R0	300	107.8	34.3	23	ATS-EXL145-300-R0	300	48.8	31.8	7
ATS-EXL69-300-R0	300	36	28.5	5	ATS-EXL105-300-R0	300	342	49.5	27	ATS-EXL146-300-R0	300	54	30	13
ATS-EXL70-300-R0	300	36	35.6	5	ATS-EXL108-300-R0	300	240	55	25	ATS-EXL312-300-R0	300	80.3	30	32
ATS-EXL71-300-R0	300	37	8	15	ATS-EXL109-300-R0	300	200	32.1	34	ATS-EXL424-288-R0	288	188	16.5	35











All thermal performance data for one inch of extrusion • All data is for $T_{\text{ambient}} = 25^{\circ}\text{C}$ and $P = 10\text{W}$

	MPN	L (mm)	W (mm)	H (mm)	Mass per 25mm length	# of Fins	R @ 200 lfm (°C/W)	R @ 400 lfm (°C/W)	R @ 600 lfm (°C/W)	R @ 800 lfm (°C/W)	R natural convection (°C/W)	R @ 200 lfm (°C/W) Ducted
	ATS-EXL1-254-R0	254	100.8	10	29.3	40	2.2	1.3	1	0.9	15	1.2
	ATS-EXL1-1220-R0	1220										
	ATS-EXL2-254-R0	254	100.8	20	49	40	0.9	0.6	0.5	0.4	10	0.6
	ATS-EXL2-1220-R0	1220										
	ATS-EXL6-254-R0	254	100.8	27	34.3	40	0.7	0.5	0.4	0.3	7.9	0.5
	ATS-EXL6-1220-R0	1220										
	ATS-EXL7-248-R0	248	101	14	51.5	22	1.8	1.1	0.9	0.8	14.7	0.9
	ATS-EXL7-1220-R0	1220										
	ATS-EXL58-300-R0	300	6	8	1.7	3	45	26	20	17	65	18
	ATS-EXL58-1220-R0	1220										
	ATS-EXL59-300-R0	300	14	16	6	6	11	5.9	4.6	3.9	38	4.7
	ATS-EXL59-1220-R0	1220										
	ATS-EXL60-300-R0	300	13.9	25.2	13.6	3	11.5	8.4	7	6.1	21	6.8
	ATS-EXL60-1220-R0	1220										
	ATS-EXL61-300-R0	300	15	6	3.2	6	29	17	13.8	11.9	57	12.5
	ATS-EXL61-1220-R0	1220										
	ATS-EXL62-300-R0	300	24.3	17.5	8.2	8	5.2	3.6	2.9	2.6	17.9	3.5
	ATS-EXL62-1220-R0	1220										
	ATS-EXL63-300-R0	300	25	35	19	10	2.5	1.6	1.6	1.1	13	1.6
	ATS-EXL63-1220-R0	1220										
	ATS-EXL64-300-R0	300	25	22	12.8	10	3.9	2.4	1.9	1.7	18.5	2.3
	ATS-EXL64-1220-R0	1220										
	ATS-EXL65-300-R0	300	41	25	12.5	6	4.5	3.3	2.7	2.4	11.7	3.5
	ATS-EXL65-1220-R0	1220										
	ATS-EXL66-300-R0	300	25.4	4	3.6	9	24.8	15	12	10.5	55	17
	ATS-EXL66-1220-R0	1220										






All thermal performance data for one inch of extrusion • All data is for $T_{\text{ambient}} = 25^{\circ}\text{C}$ and $P = 10\text{W}$

	MPN	L (mm)	W (mm)	H (mm)	Mass per 25mm length	# of Fins	R @ 200 lfm ($^{\circ}\text{C/W}$)	R @ 400 lfm ($^{\circ}\text{C/W}$)	R @ 600 lfm ($^{\circ}\text{C/W}$)	R @ 800 lfm ($^{\circ}\text{C/W}$)	R natural convection ($^{\circ}\text{C/W}$)	R @ 200 lfm ($^{\circ}\text{C/W}$) Ducted
	ATS-EXL67-300-R0	300	27.5	13.5	6.9	10	5.8	3.8	3.1	2.7	21.7	3.6
	ATS-EXL67-1220-R0	1220										
	ATS-EXL68-300-R0	300	51	25	17.4	9	3	2.1	1.8	1.6	9.6	2.3
	ATS-EXL68-1220-R0	1220										
	ATS-EXL69-300-R0	300	36	28.5	27	5	5.4	4	3.3	2.9	12.1	3.9
	ATS-EXL69-1220-R0	1220										
	ATS-EXL70-300-R0	300	36	35.6	32.1	5	4.2	3.1	2.5	2.2	9.7	3.1
	ATS-EXL70-1220-R0	1220										
	ATS-EXL71-300-R0	300	37	8	9.4	15	9.5	5.2	4.1	3.5	36.4	4
	ATS-EXL71-1220-R0	1220										
	ATS-EXL72-300-R0	300	40.8	6.6	12.9	15	17.7	8.6	6.3	5.2	47.4	4.4
	ATS-EXL72-1220-R0	1220										
	ATS-EXL73-300-R0	300	45	10	15.2	11	6.8	4.7	3.9	3.4	18.6	4.2
	ATS-EXL73-1220-R0	1220										
	ATS-EXL74-300-R0	300	70	15	28.1	28	2.4	1.2	1.0	0.8	18.2	1.1
	ATS-EXL74-1220-R0	1220										
	ATS-EXL75-300-R0	300	75.6	18.5	26.9	26	1.4	1	0.8	0.7	9.7	1
	ATS-EXL75-1220-R0	1220										
	ATS-EXL76-300-R1	300	93.4	40	88.8	28	0.5	0.4	0.3	0.3	5.2	0.4
	ATS-EXL76-1220-R0	1220										
	ATS-EXL77-300-R0	300	120.8	16.6	55.2	48	1	0.6	0.5	0.4	12	0.6
	ATS-EXL77-1220-R0	1220										
	ATS-EXL78-300-R0	300	146	7.6	36.8	24	4.4	3.1	2.6	2.3	12	2.4
	ATS-EXL78-1220-R0	1220										
	ATS-EXL84-300-R0	300	70	25	42.5	28	1.4	0.8	0.6	0.5	12.4	0.7
	ATS-EXL84-1220-R0	1220										









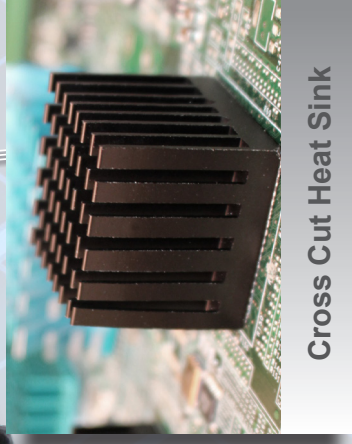
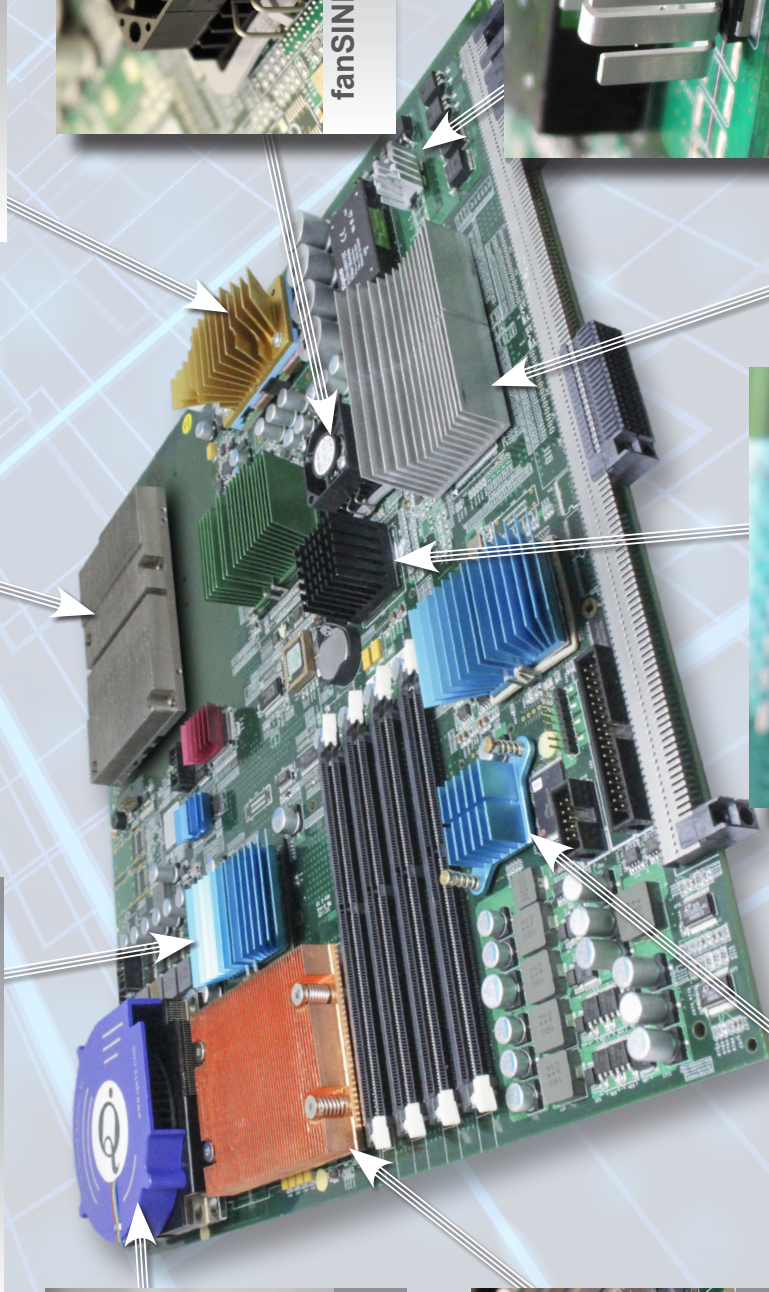
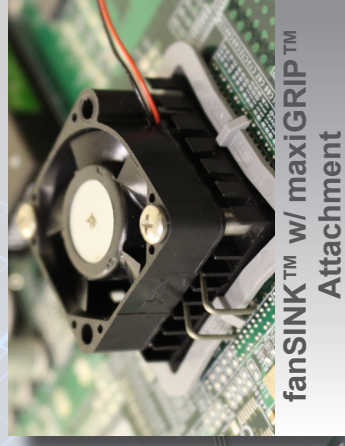
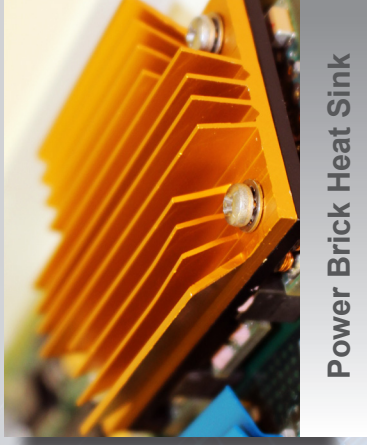
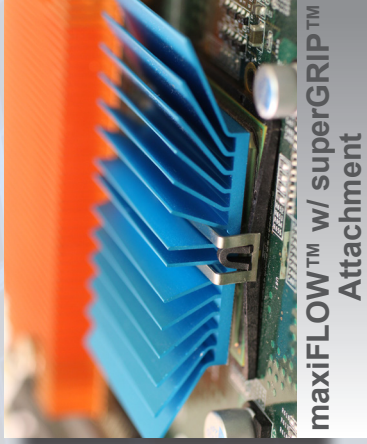
All thermal performance data for one inch of extrusion • All data is for $T_{\text{ambient}} = 25^{\circ}\text{C}$ and $P = 10\text{W}$

	MPN	L (mm)	W (mm)	H (mm)	Mass per 25mm length	# of Fins	R @ 200 lfm ($^{\circ}\text{C/W}$)	R @ 400 lfm ($^{\circ}\text{C/W}$)	R @ 600 lfm ($^{\circ}\text{C/W}$)	R @ 800 lfm ($^{\circ}\text{C/W}$)	R natural convection ($^{\circ}\text{C/W}$)	R @ 200 lfm ($^{\circ}\text{C/W}$) Ducted
	ATS-EXL98-300-R0	300	120	36	147.7	27	1.0	0.7	0.6	0.5	4.7	0.6
	ATS-EXL98-1220-R0	1220										
	ATS-EXL99-300-R0	300	100	34.5	88.1	19	1.1	0.8	0.7	0.6	4.3	0.8
	ATS-EXL99-1220-R0	1220										
	ATS-EXL100-300-R0	300	130	33.5	138.6	26	1.0	0.7	0.6	0.5	4.3	0.6
	ATS-EXL100-1220-R0	1220										
	ATS-EXL101-300-R0	300	152.4	34.6	162.4	28	0.9	0.6	0.5	0.5	3.6	0.6
	ATS-EXL101-1220-R0	1220										
	ATS-EXL102-300-R0	300	179	27	155.8	23	1.2	0.9	0.7	0.6	4.0	0.8
	ATS-EXL102-1220-R0	1220										
	ATS-EXL103-300-R0	300	115	33.6	124.4	23	1.1	0.8	0.7	0.6	4.6	0.7
	ATS-EXL103-1220-R0	1220										
	ATS-EXL104-300-R0	300	107.8	34.3	115.6	23	1.0	0.7	0.6	0.5	5.1	0.6
	ATS-EXL104-1220-R0	1220										
	ATS-EXL105-300-R0	300	342	49.5	392.4	27	0.6	0.4	0.4	0.3	2.0	0.5
	ATS-EXL105-1220-R0	1220										
	ATS-EXL108-300-R0	300	240	55	315.1	25	0.5	0.4	0.3	0.3	2.0	0.4
	ATS-EXL108-1220-R0	1220										
	ATS-EXL109-300-R0	300	200	32.1	181.7	34	0.7	0.5	0.4	0.4	3.1	0.5
	ATS-EXL109-1220-R0	1220										
	ATS-EXL110-300-R0	300	200	45	206.4	23	0.7	0.5	0.5	0.4	2.5	0.6
	ATS-EXL110-1220-R0	1220										
	ATS-EXL113-300-R0	300	40	30	17.4	5	4.5	3.3	2.8	2.5	10.0	4.0
	ATS-EXL-113-1220-R0	1220										



All thermal performance data for one inch of extrusion • All data is for $T_{\text{ambient}} = 25^{\circ}\text{C}$ and $P = 10\text{W}$

	MPN	L (mm)	W (mm)	H (mm)	Mass per 25mm length	# of Fins	R @ 200 lfm ($^{\circ}\text{C/W}$)	R @ 400 lfm ($^{\circ}\text{C/W}$)	R @ 600 lfm ($^{\circ}\text{C/W}$)	R @ 800 lfm ($^{\circ}\text{C/W}$)	R natural convection ($^{\circ}\text{C/W}$)	R @ 200 lfm ($^{\circ}\text{C/W}$) Ducted
	ATS-EXL114-300-R0	300	80	30	33.4	9	2.5	1.8	1.5	1.4	6.2	2.2
	ATS-EXL114-1220-R0	1220										
	ATS-EXL115-300-R0	300	120	30	49.5	13	1.7	1.3	1.1	0.9	4.6	1.5
	ATS-EXL115-1220-R0	1220										
	ATS-EXL116-300-R0	300	51.6	42.5	55	9	1.9	1.4	1.2	1.0	5.7	1.5
	ATS-EXL116-1220-R0	1220										
	ATS-EXL117-300-R0	300	233.2	12.5	100.6	66	1.1	0.7	0.6	0.5	6.9	0.6
	ATS-EXL117-1220-R0	1220										
	ATS-EXL118-300-R0	300	50.7	12.3	18.8	17	4.0	2.6	2.1	1.8	19.9	2.3
	ATS-EXL118-1220-R0	1220										
	ATS-EXL119-300-R0	300	95	14	43.4	35	2.1	1.2	1.0	0.8	14.7	1.0
	ATS-EXL119-1220-R0	1220										
	ATS-EXL120-300-R0	300	80	14	34.8	26	2.4	1.6	1.3	1.1	13.0	1.4
	ATS-EXL120-1220-R0	1220										
	ATS-EXL121-300-R0	300	60	14	26.3	20	3.2	2.0	1.7	1.5	16.1	1.8
	ATS-EXL121-1220-R0	1220										
	ATS-EXL122-300-R1	300	87.6	32.8	80.7	14	1.6	1.2	1.0	0.9	5.1	1.2
	ATS-EXL137-300-R0	300	63.5	10.4	21.7	15	5.0	3.4	2.8	2.5	15.6	2.9
	ATS-EXL138-300-R0	300	203.5	19.7	92.4	79	0.6	0.3	0.3	0.2	6.7	0.3
	ATS-EXL142-300-R0	300	104	29	65.2	29	0.9	0.7	0.6	0.5	5.1	0.7
	ATS-EXL145-300-R0	300	48.8	31.8	39.1	7	3.4	2.5	2.1	1.8	8.3	2.6
	ATS-EXL145-1220-R0	1220										
	ATS-EXL146-300-R0	300	54	30	31.7	13	2.0	1.4	1.2	1.0	7.1	1.4
	ATS-EXL146-1220-R0	1220										
	ATS-EXL312-300-R0	300	80.3	30	69.8	32	0.8	0.5	0.4	0.4	10.7	0.5
	ATS-EXL312-1220-R0	1220										
	ATS-EXL424-288-R0	288	188	16.5	68.9	35	0.9	0.7	0.6	0.5	4.0	0.8
	ATS-EXL424-1220-R0	1220										



#WeCoverTheBoard