


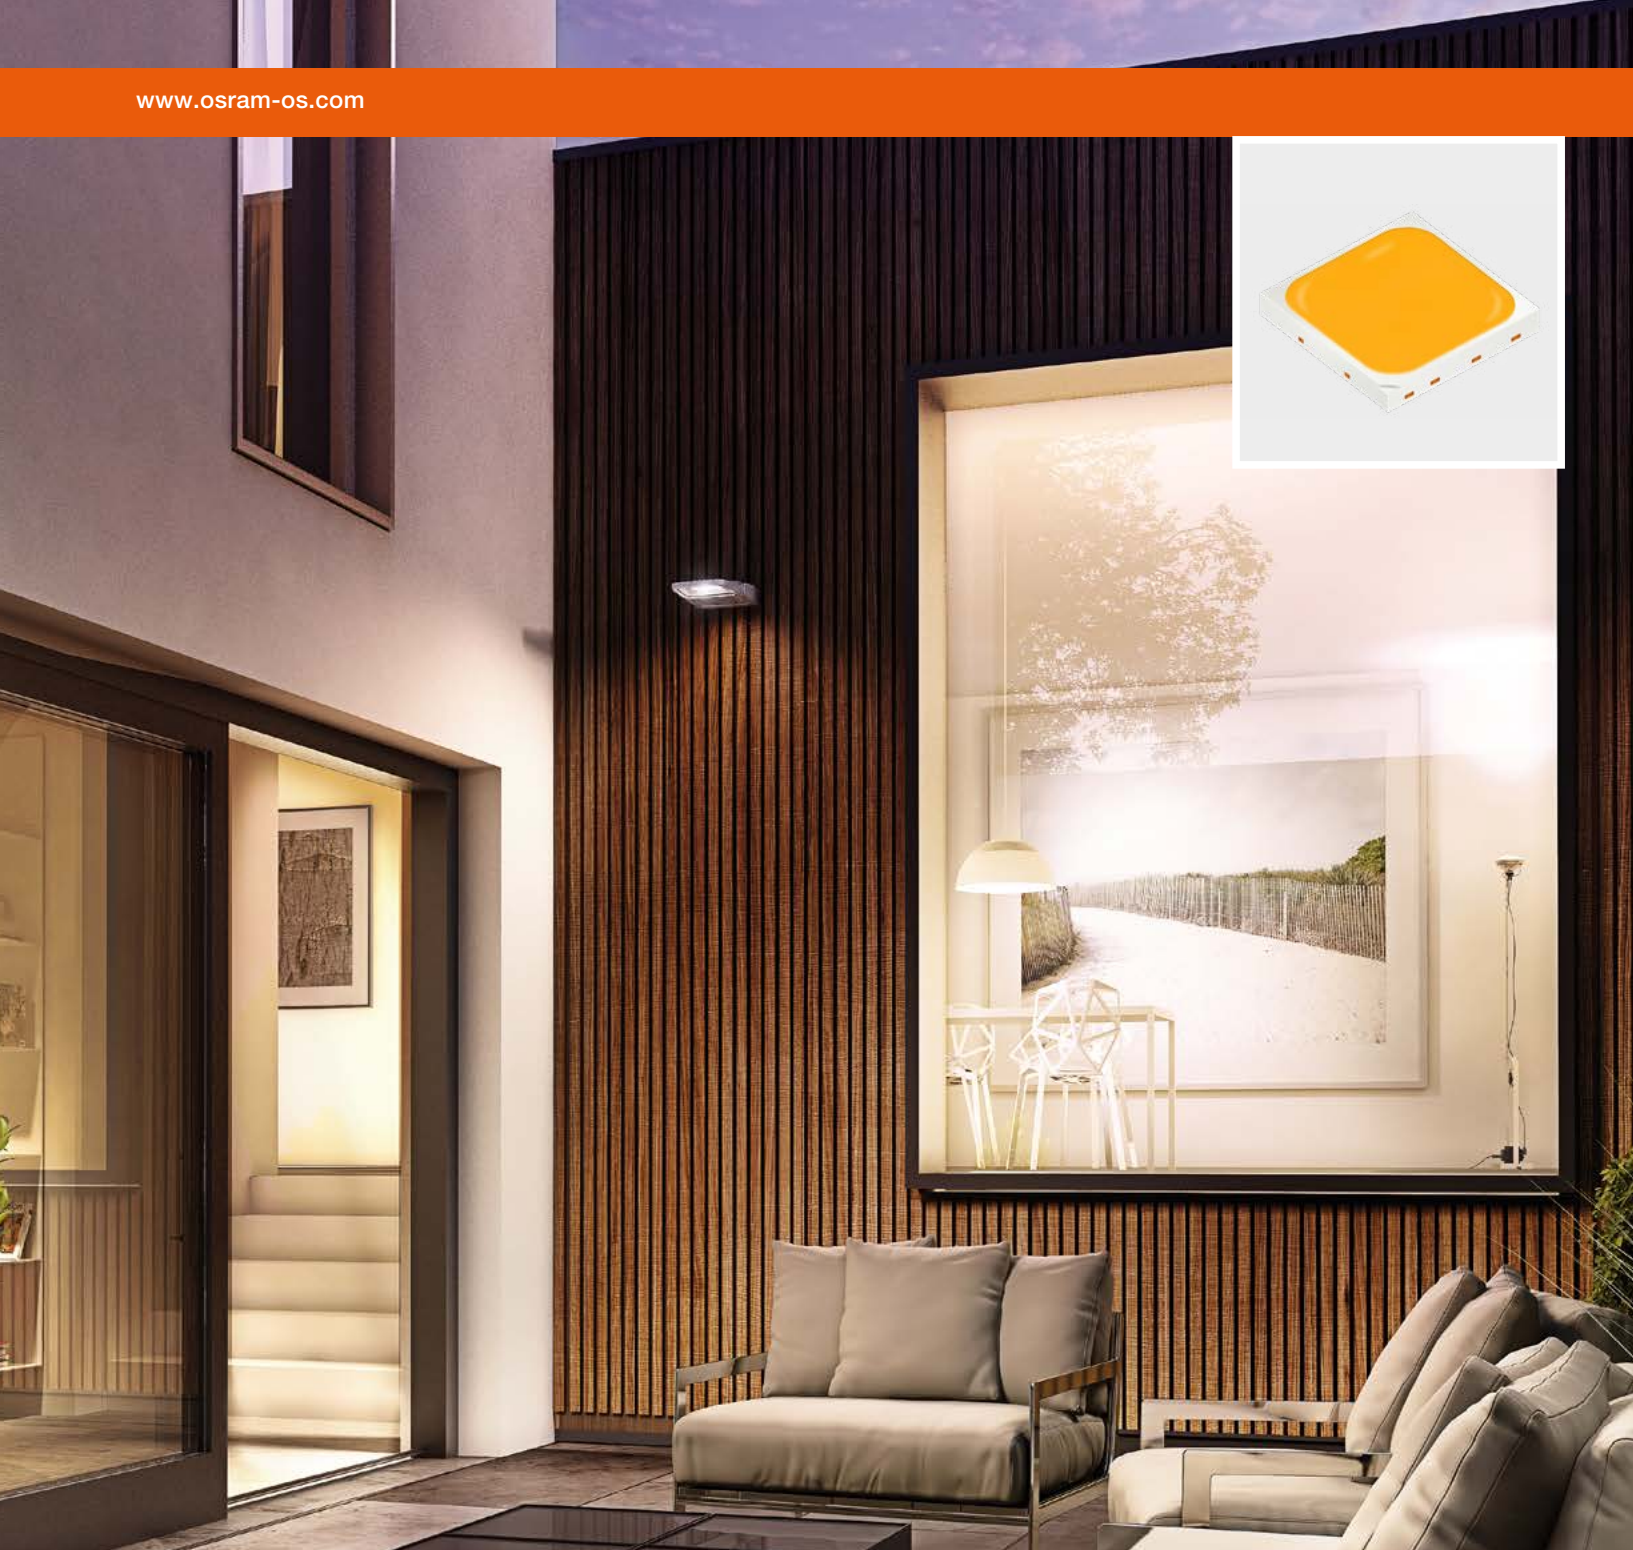

Light is revolutionary

DURIS[®] S 8


High power for modern living

Light is OSRAM

OSRAM
Opto Semiconductors



Residential Streetlighting

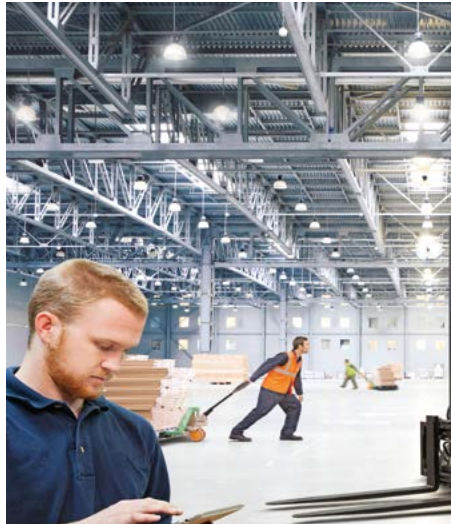

Industrial high bay lighting



Residential Indoor Lighting

Advantages

DURIS® S 8 is part of the revolutionary OSRAM Opto Semiconductors' Chip ARRAY SMD (CAS) consumer product line. This multi chip LED family combines the well-known advantages of mid-power SMT package technology with high luminous flux performance. It allows completely new designs for consumer indoor and outdoor applications.

Features

- Footprint: 5 mm × 5 mm
- Various luminous flux packages from one package family
- Small light emitting surface improves optical behavior in directional lighting
- Low thermal resistance to enable high operating power
- Optimized driver efficiency and costs due to higher voltage option

- Full range of color temperatures: 2,700 K–6,500 K (white)
- Test results according to IESNA LM-80 available
- High efficacy
- Outdoor stability

Applications

- DURIS® S 8 is a perfect solution for all directional lights and also a perfect replacement of small clusters of mid-power LEDs, providing the advantage of a single spot appearance.
- Directional lights for shops, hospitality and home
 - Directional retrofits (e.g. MR16)
 - Non directional retrofits (e.g. A-Lamps)
 - High luminous flux clusters, e.g. high bay lights
 - Residential Streetlight
 - Consumer outdoor lighting

DURIS® S 8

Type	Typ. $R_{th, JS\ el}$ (K/W)	Available CCT range (K)	CRI min.	Typ. Luminous flux (lm)	Typ. Efficacy (lm/W)	Max. Current (mA)	Typ. Binning current (mA)	Typ. Binning temperature (°C)	Typ. Voltage (V)	Binning CCT (K)
GW P9LR31.EM	3.5	2,700 – 6,500	80	520	140	200	150	25	24.8	3,000
GW P9LR31.PM	3.5	3,000 – 6,500	70	580	152	200	150	25	25.5	5,000
GW P9LR32.EM	3.5	2,700 – 6,500	80	520	140	800	600	25	6.2	3,000
GW P9LR32.CM	3.5	2,700 – 4,000	90	430	116	800	600	25	6.2	3,000
GW P9LR33.CM	3.5	2,700 – 4,000	90	430	116	200	150	25	24.8	3,000
GW P9LR34.PM	1.5	3,000 – 5,700	70	200	200	200	45	25	22.2	4,000
GW P9LR35.PM	1.5	3,000 – 5,700	70	200	200	800	180	25	5.5	4,000
GW P9LT31.EM	2.6	2,700 – 6,500	80	640	138	200	150	25	31.0	3,000
GW P9LT31.CM	2.6	2,700 – 4,000	90	520	112	200	150	25	31.0	3,000
GW P9LT31.PM	2.6	3,000 – 6,500	70	740	159	200	150	25	31.5	5,000
GW P9LT32.EM	2.6	2,700 – 6,500	80	640	138	1,000	750	25	6.2	3,000
GW P9LT32.CM	2.6	2,700 – 4,000	90	518	111	1,000	750	25	6.2	3,000
GW P9LT32.PM	2.6	3,000 – 6,500	70	740	159	1,000	750	25	6.3	5,000



For more technical details, please visit our product pages www.osram-os.com



DURIS® S 8 on the internet:
www.osram-os.com/duris-s8

For further information on the available products please visit our product catalog at www.osram.com/general-lighting

LED Light for you Network
www.ledlightforyou.com



Asia

OSRAM Opto Semiconductors
(China) Co., Ltd.
29/F Harbour Ring Plaza
No. 18 Xi Zang Middle Road
Shanghai, 200001 P.R.C.
China
E-mail: prasia@osram-os.com

Europe

OSRAM Opto Semiconductors GmbH
Leibnizstraße 4
D-93055 Regensburg, Germany
Phone: +49 941 850 1700
Fax: +49 941 850 3302

USA

OSRAM Opto Semiconductors Inc.
1150 Kifer Road, Suite 100
Sunnyvale, CA 94086, USA
Main Phone number: (408) 962-3700
Main Fax: (408) 738-9120
Inbound Toll Free: (866) 993-5211
E-mail: info@osram-os.com