

MATERIALS:

- BERYLLIUM COPPER PER ASTM-B-196, QQ-C-530
- PTFE FLUOROCARBON PER ASTM-D-1710 TYPE 1




FINISH:

- CENTER CONDUCTORS, AND SOLDER COMPONENTS SHALL BE PLATED PER MIL-G-45204 TYPE II, CLASS 1 OVER NICKEL PLATE PER QQ-N-290.

FREQUENCY: DC-40GHz

VSWR: 1.25 TO 40GHz

38-146-1000-00

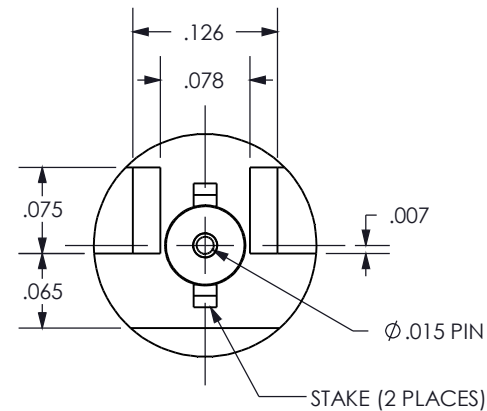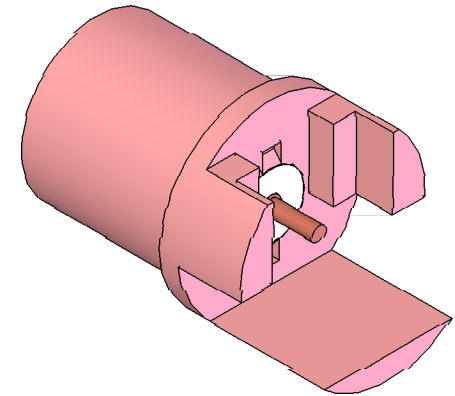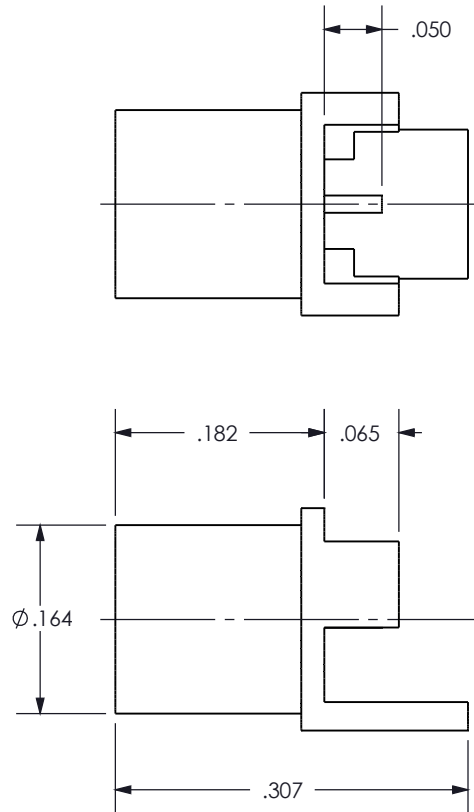

LTR	DESCRIPTION	DATE	APPR.	DRAWN	CHECKED	USED ON		
-	REL	9/25/14		<i>LMW</i>		38-146-1000-00	 SRI CONNECTOR GAGE COMPANY 3950 DOW ROAD MELBOURNE FLORIDA 32934	
A	ECR2366	6/26/17	DCam					
				PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT SHALL NOT BE DUPLICATED OR DISTRIBUTED WITHOUT WRITTEN PERMISSION FROM SRI CONNECTOR GAGE COMPANY, 3950 DOW ROAD, MELBOURNE, FLORIDA 32934, USA. THIS LAYOUT IS CONCEPTUAL ONLY AND IS SUBJECT TO FINAL DRAWING.		MATERIAL	TITLE:	
						FINISH		
						SIZE	FSCM NO.	SHEET
						A	OHM01	1
								DWG. NO.
								38-146-1000-00

**FULL DETENT
.015 PIN**