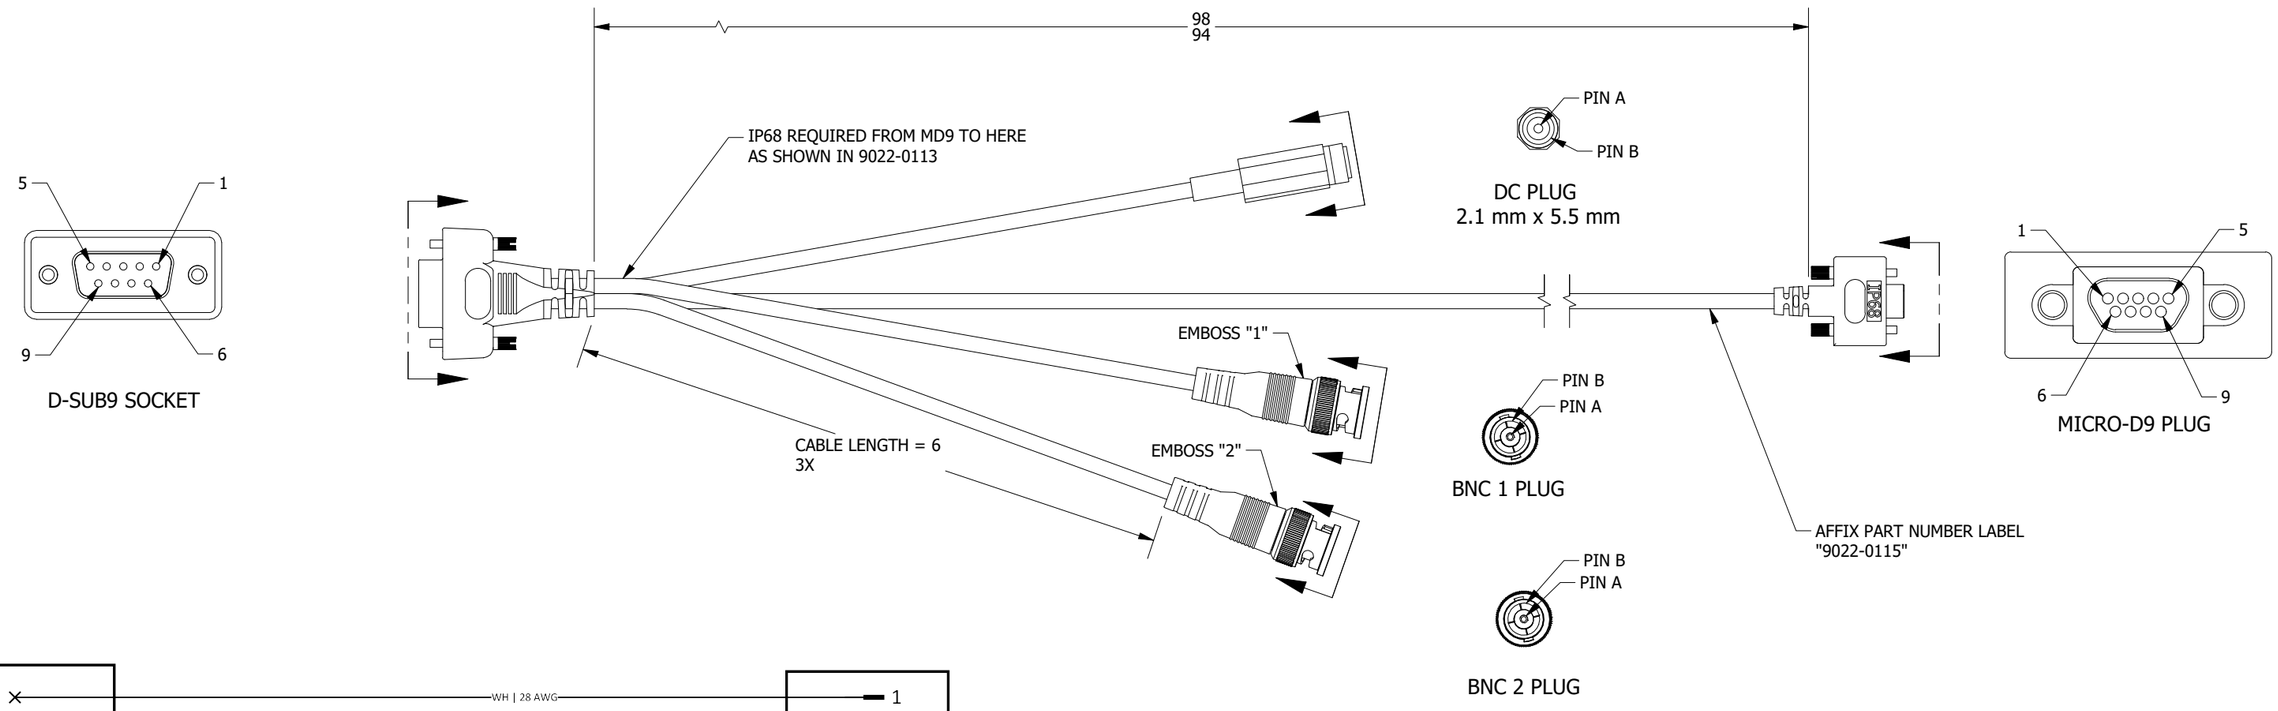

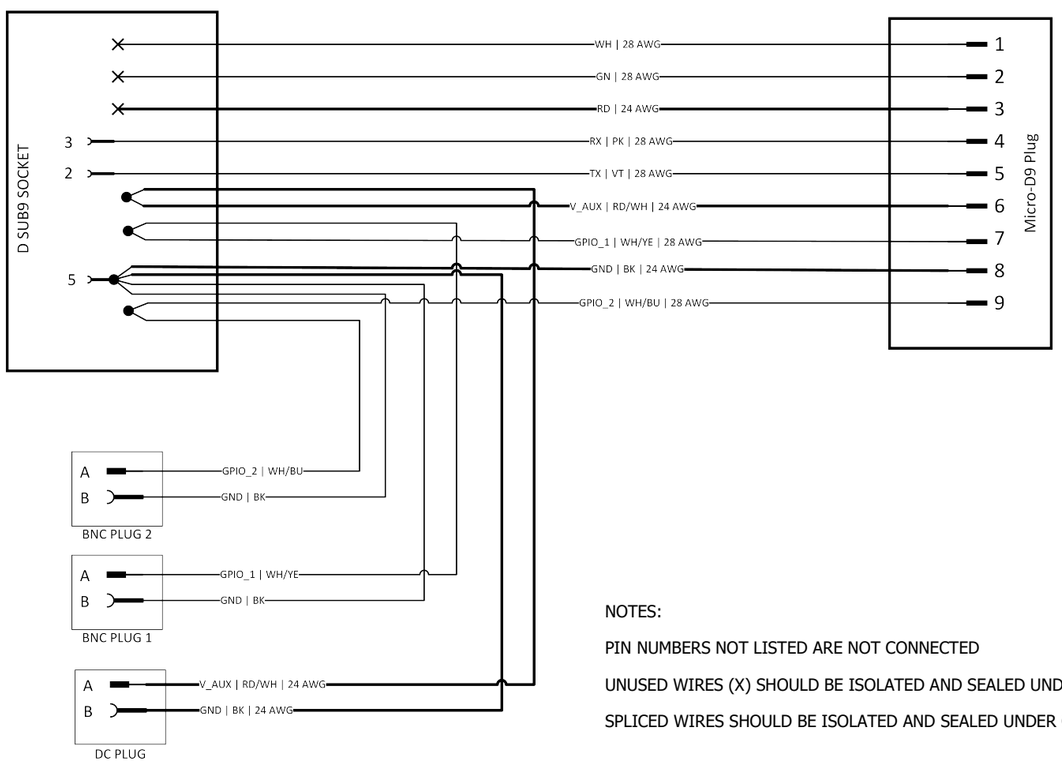

NOTES:

PIN NUMBERS NOT LISTED ARE NOT CONNECTED

UNUSED WIRES (X) SHOULD BE ISOLATED AND SEALED UNDER OVERMOLD

SPLICED WIRES SHOULD BE ISOLATED AND SEALED UNDER OVERMOLD

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES. TOLERANCES:(UOS): .X = ± .02 .XX = ± .01 .XXX = ± .005 HOLE DIAMETERS: ± .002 ANGLES: ± 0.5° SURFACE FINISH: 63 MICROINCHES MATERIAL:	DRAWN S. SMITH	10/26/22	Parker LORD 459 HURRICANE LN. WILLISTON VT 802-862-6629
	REFERENCE PLM SYSTEM FOR APPROVALS		TITLE GPIO
	HEREIN IS CONFIDENTIAL AND PROPRIETARY TO LORD CORPORATION, A SUBSIDIARY OF PARKER HANNIFIN, AND SHALL NOT BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OR USED FOR ANY UNAUTHORIZED PURPOSE UNLESS EXPRESSLY AUTHORIZED IN WRITING BY LORD CORPORATION, A SUBSIDIARY OF PARKER HANNIFIN		DWG NO 9022-0115 / REVISION - / CAGE CODE OXYZ9
			SIZE: B / SHEET 1 OF 1 / WWW.MICROSTRAIN.COM