



CQB100W8 Series Application V11 March 2025

ISOLATED DC-DC CONVERTER CQB100W8 SERIES APPLICATION NOTE



Approved By:

Department	Approved By	Checked By	Written By
Research and Development Department	Jacky	Astray	Sean
Design Quality Department	Benny	JoJo	



CQB100W8 Series

Application V11 March 2025

Contents

1. Introduction	3
2. Pin Function Description	3
3. Connection for Standard Use	4
4. Test Set-Up	4
5. Recommend Layout, PCB Footprint and Soldering Information	5
6. Features and Functions	5
6.1 UVLO (Under Voltage Lock Out)	5
6.2 Over Current/Short Circuit Protection	6
6.3 Output Over Voltage Protection	6
6.4 Over Temperature Protection	6
6.5 Remote On/Off	7
6.6 Output Remote Sensing	7
6.7 Output Voltage Adjustment	8
7. Input/Output Considerations	10
7.1 Input Capacitance at the Power Module	10
7.2 Hold Up Time	10
7.3 Output Ripple and Noise	11
7.5 Output Capacitance	11
8. Series and Parallel Operation	11
8.1 Series Operation	11
8.2 Parallel Operation	12
8.3 Redundant Operation	12
9. Thermal Design	13
9.1 Operating Temperature Range	13
9.2 Convection Requirements for Cooling	13
9.3 Thermal Considerations	13
9.4 Power Derating	13
9.5 Quarter Brick Heat Sinks	15
10. Safety & EMC	15
10.1 Input Fusing and Safety Considerations	15
10.2 EMC Considerations	15
10.3 Suggested Configuration for RIA12 Surge Test	36



CQB100W8 Series

Application V11 March 2025

1. Introduction

The CQB100W8 series of DC-DC converters offers 100 watts of output power at single output voltages of 5, 12, 15, 24, 28, 48, 54VDC with industry standard quarter-brick. It has an ultrawide (8:1) input voltage range of 9 to 75VDC (36VDC nominal) and 3000VAC reinforced isolation.


Compliant with EN 50155, EN 45545, EN 50121-3-2. High efficiency up to 91%, allowing case operating temperature range of -40°C to 105°C. An optional heat sink is available to extend the full power range of the unit. Very low no load power consumption (30mA), an ideal solution for energy critical systems.

The standard control functions include remote **on/off** (positive or negative) and +15% to -20% (except for 54V_{out} +10% to -20%) adjustable output voltage.

Fully protected against input UVLO (under voltage lock out), output over-current, output over-voltage, over-temperature and continuous short circuit conditions.

CQB100W8 series is designed primarily for common railway applications of 24V, 36V, 48V nominal voltage and also suitable for distributed power architectures, telecommunications, battery operated equipment and industrial applications.

2. Pin Function Description

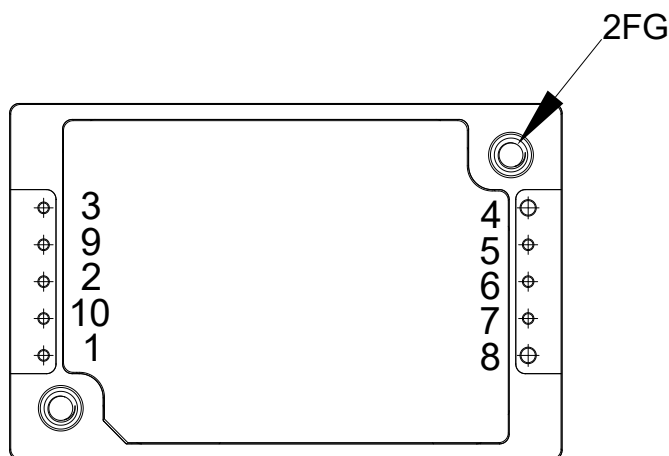

No	Label	Function	Description	Reference
1	+Vin	+V Input	Positive Supply Input	Section 7.1/7.2/ 7.3
2	ON/OFF	On/Off	External Remote On/Off Control	Section 6.5
3	-Vin	-V Input	Negative Supply Input	Section 7.1/7.2/7.3
4	-Vo	-V Output	Negative Power Output	Section 7.4/7.5
5	-Sen	-Sense	Negative Output Remote Sense	Section 6.6
6	Trim	Trim	External Output Voltage Adjustment	Section 6.7
7	+Sen	+Sense	Positive Output Remote Sense	Section 6.6
8	+Vo	+V Output	Positive Power Output	Section 7.4/7.5
9	Bus	Bus	Pre-Regulator Voltage Output (Option)	Section 7.2
10	UVLO	UVLO	External UVLO Function (Option)	Section 6.1
--	--	Mounting Insert	Mounting Insert (FG)	Section 9.5/10.2

Note: Base plate can be connected to FG through M3 threaded mounting insert. Recommended torque 3Kgf-cm.




CQB100W8 Series

Application V11 March 2025

3. Connection for Standard Use

The connection for standard use is shown below. An external input capacitor (C1) 470uF for all models is recommended to reduce input ripple voltage. External output capacitors (C2, C3) are recommended to reduce output ripple and noise, 10uF polymer tantalum and 1uF ceramic capacitors for all models.

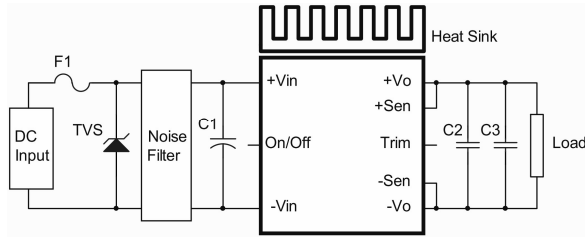

Symbol	Component	Reference
F1, TVS	Input fuse, TVS	Section 10.1
C1	External capacitor on the input side	Note Section 7.2
C2, C3	External capacitor on the output side	Section 7.4/7.5
Noise Filter	External input noise filter	Section 10.2
Remote On/Off	External remote on/off control	Section 6.5
Trim	External output voltage adjustment	Section 6.7
Heat Sink	External heat sink	Section 9.2/9.3/9.4/9.5
+Sense/-Sense	--	Section 6.6

Note:

If the impedance of input line is high, C1 capacitance must be more than above. Use more than two recommended capacitors above in parallel and ensure the ESR is lower than 100mΩ when ambient temperature becomes lower than -20°C.

4. Test Set-Up

The basic test set-up to measure parameters such as efficiency and load regulation is shown below. When testing the modules under any transient conditions please ensure that the transient response of the source is sufficient to power the equipment under test. We can calculate:

- Efficiency
- Load regulation and line regulation

The value of efficiency is defined as:

$$\eta = \frac{V_o \times I_o}{V_{in} \times I_{in}} \times 100\%$$

Where:

V_o is output voltage,
 I_o is output current,
 V_{in} is input voltage,
 I_{in} is input current

The value of load regulation is defined as:

$$\text{Load reg.} = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$

Where:


V_{FL} is the output voltage at full load
 V_{NL} is the output voltage at no load

The value of line regulation is defined as:

$$\text{Line reg.} = \frac{V_{HL} - V_{LL}}{V_{LL}} \times 100\%$$

Where:

V_{HL} is the output voltage of maximum input voltage at full load
 V_{LL} is the output voltage of minimum input voltage at full load

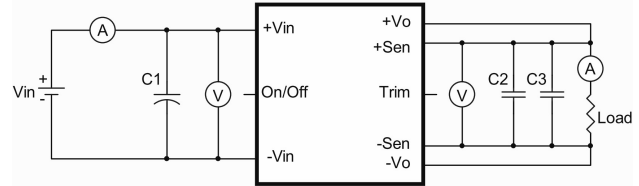

CQB100W8 Series Test Setup

C1: 470uF/100V ESR<0.04Ω

C2: 1uF/1210 ceramic capacitor

C3: 10uF polymer tantalum capacitor (ESR ≤ 0.05Ω)




CQB100W8 Series

Application V11 March 2025

5. Recommend Layout, PCB Footprint and Soldering Information


The system designer or end user must ensure that metal and other components in the vicinity of the converter meet the spacing requirements for which the system is approved. Low resistance and inductance PCB layout traces are the norm and should be used where possible. Due consideration must also be given to proper low impedance tracks between power module, input and output grounds.

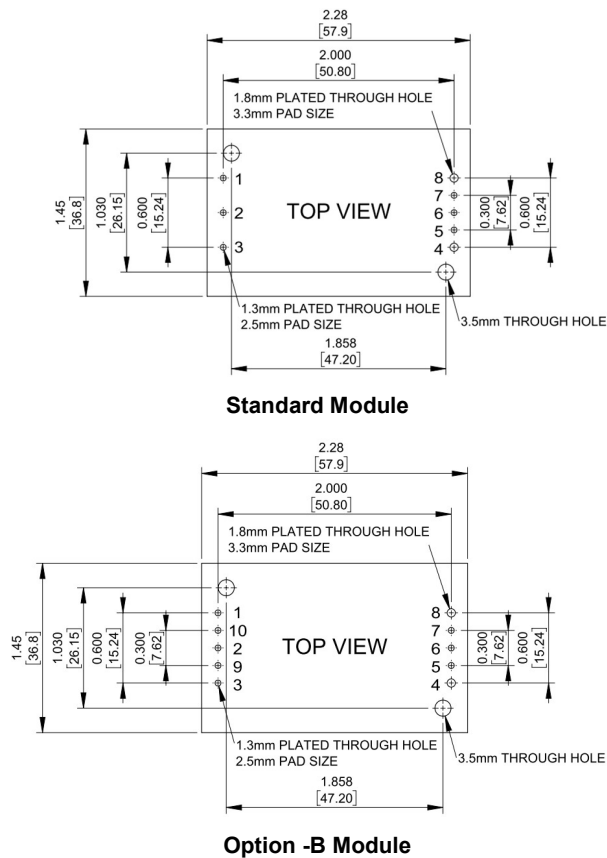

Clean the soldered side of the module with a brush, prevent liquid from getting into the module. Do not clean by soaking the module into liquid. Do not allow solvent to come in contact with product labels or resin case as this may change the color of the resin case or cause deletion of the letters printed on the product label. After cleaning, dry the modules well.

The suggested soldering iron is 450°C for up to 5 seconds (less than 50W). Furthermore, the recommended soldering profile is shown below, and PCB layout is referring to **section 10.2**.


Lead Free Wave Soldering Profile

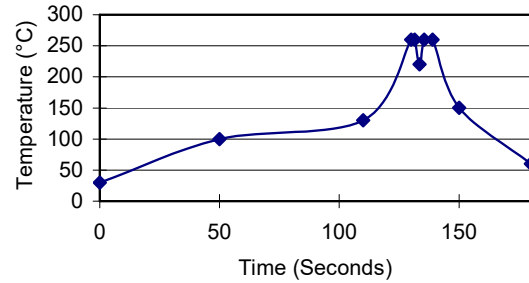

6. Features and Functions

6.1 UVLO (Under Voltage Lock Out)

Input under voltage lockout is standard on the CQB100W8 series unit. The unit will shut down when the input voltage drops below a threshold, and the unit will operate when the input voltage goes above the upper threshold.

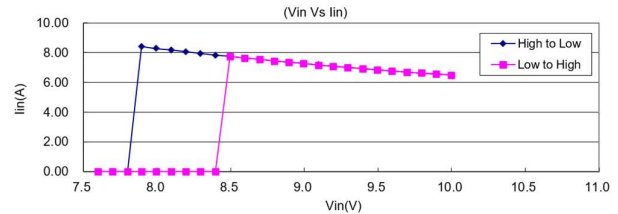


And the CQB100W8 series has an adjustable under voltage lockout which will shut down the converter according to following settings.

Nom. Input Voltage (VDC)	24	36	48
Turn Off Threshold (VDC)	13.8 ±0.75	20.8 ±0.75	28.0 ±1.0
Turn On Threshold (VDC)	14.8 ±0.75	21.8 ±0.75	29.0 ±1.0
R1 Resistor (KΩ) (UVLO to +Vin)	Open	Open	Open
R2 Resistor (KΩ) (UVLO to -Vin)	6.4	2.95	1.9



CQB100W8 Series

Application V11 March 2025

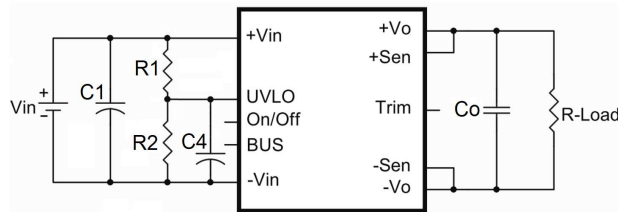

C1: 470uF/100V ESR<0.04Ω


C4: 0.01uF/50V ceramic capacitor

Note:

If need to configure UVLO turn off threshold to 8.0Vdc, please make sure the output power is no more than full load, even though the 8.5V operating is short duration. And the module operating between input 9Vdc to 12Vdc, please make sure the output power is no more than full load.

6.2 Over Current/Short Circuit Protection

All models have internal over current and continuous short circuit protection. The unit operates normally once the fault condition is removed. At the point of current limit inception, the converter will go into hiccup mode protection.

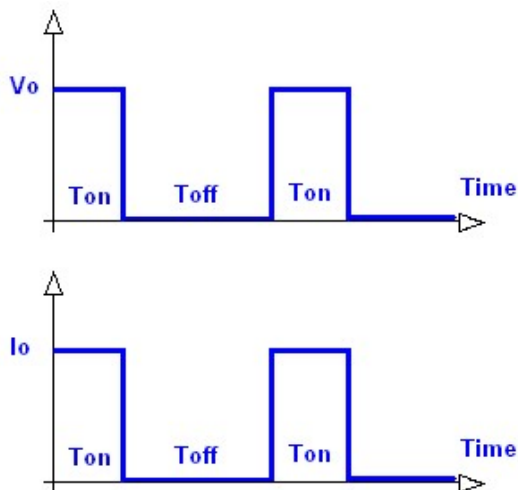

6.3 Output Over Voltage Protection



The output over voltage protection consists of circuitry that internally limits the output voltage. If more accurate output over voltage protection is required, then an external circuit can be used via the remote on/off pin.

Note:

Please note that device inside the power supply might fail when voltage more than rate output voltage is applied to output pin. This could happen when the customer tests the over voltage protection of the unit. OVP can be tested by using the TRIM UP function. Consult us for more information.

6.4 Over Temperature Protection

These modules have an over temperature protection circuit to safeguard against thermal damage. Shutdown occurs with the maximum case reference temperature is exceeded. The module will restart when the case temperature falls below the over temperature recovery threshold. Please measure case temperature of the center part of aluminum base plate.

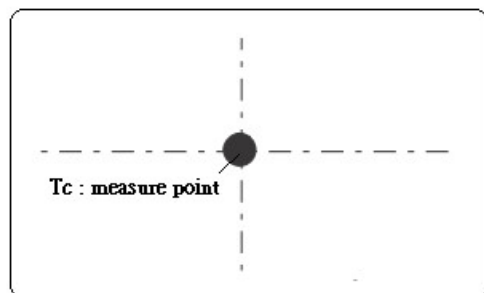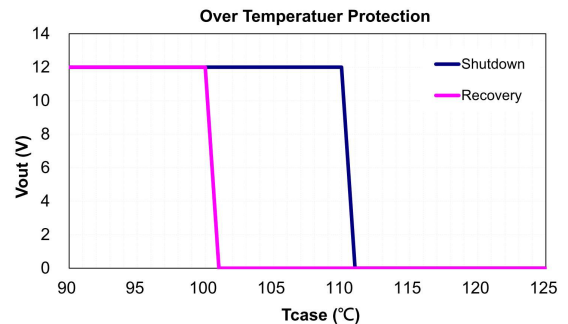



CQB100W8 Series

Application V11 March 2025

6.5 Remote On/Off


The CQB100W8 series allows the user to switch the module on and off electronically with the remote **on/off** feature. All models are available in “positive logic” and “negative logic” (optional) versions. The converter turns on if the remote **on/off** pin is high (>3.5Vdc to 75Vdc or open circuit). Setting the pin low (0 to <1.2Vdc) will turn the converter off. The signal level of the remote **on/off** input is defined with respect to ground.

If not using the remote **on/off** pin, leave the pin open (converter will be on).


Models with part number suffix “N” are the “negative logic” remote **on/off** version. The unit turns off if the remote **on/off** pin is high (>3.5Vdc to 75Vdc or open circuit). The converter turns on if the **on/off** pin input is low (0 to <1.2Vdc). Note that the converter is off by default.

Logic State (Pin 2)	Negative Logic	Positive Logic
Logic Low	Module on	Module off
Logic High	Module off	Module on

The converter remote **on/off** circuit is built-in on input side. The ground pin of input side remote **on/off** circuit is -V_{in} pin. Inside connection sees below.

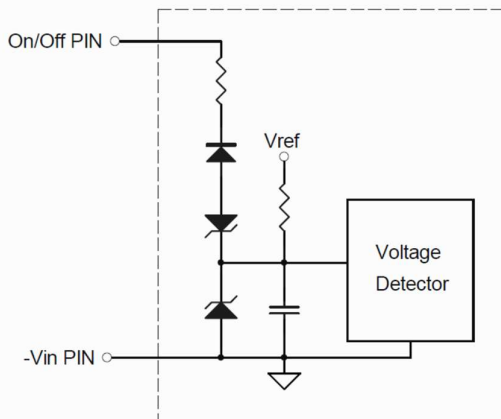

Connection examples see below.

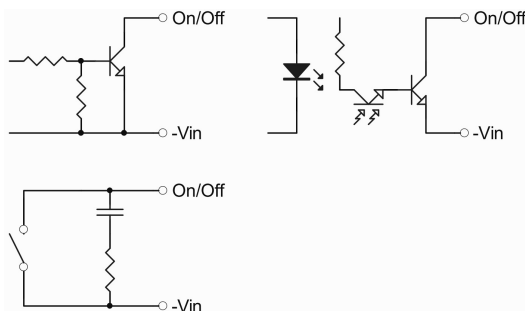

Remote On/Off Connection Example

6.6 Output Remote Sensing

The CQB100W8 series converter has the capability to remotely sense both lines of its output. This feature moves the effective output voltage regulation point from the output of the unit to the point of connection of the remote sense pins. This feature automatically adjusts the real output voltage of the CQB100W8 series in order to compensate for voltage drops in distribution and maintain a regulated voltage at the point of load. The remote-sense voltage range is:


For V_o=54V

$$[(+V_{out}) - (-V_{out})] - [(+Sense) - (-Sense)] \leq 10\% \text{ of } V_{o_nominal}$$


For Others

$$[(+V_{out}) - (-V_{out})] - [(+Sense) - (-Sense)] \leq 15\% \text{ of } V_{o_nominal}$$

When remote sense is in use, the sense should be connected by twisted-pair wire or shield wire. If the sensing patterns are short, heavy current flows and the pattern may be damaged. Output voltage might become unstable because impedance of wiring and load condition when length of wire is exceeding 400mm. This is shown in the schematic below.

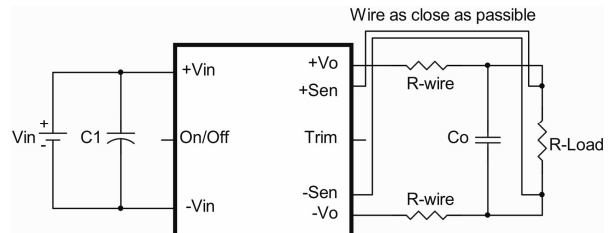

If the remote sense feature is not to be used, the sense pins should be connected locally. The +Sense pin should be connected to the +V_{out} pin at the module and the -Sense pin should be connected to the -V_{out} pin at the module. Wire between +Sense and +V_{out} and between -Sense and -V_{out} as short as possible. Loop wiring should be avoided. The converter might become unstable by noise coming from poor wiring. This is shown in the schematic below.

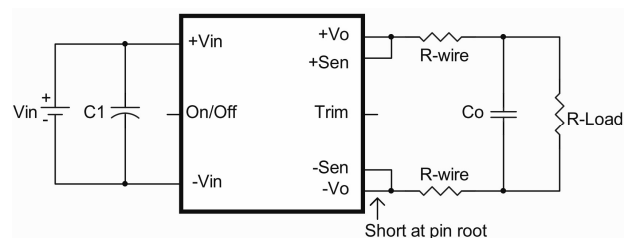



CQB100W8 Series


Application V11 March 2025

Note:


Although the output voltage can be varied (increased or decreased) by both remote sense and trim, the maximum variation for the output voltage is the larger of the two values not the sum of the values. The output power delivered by the module is defined as the voltage at the output terminals multiplied by the output current. Using remote sense and trim can cause the output voltage to increase and consequently increase the power output of the module if output current remains unchanged. Always ensure that the output power of the module remains at or below the maximum rated power. Also be aware that if $V_{o,set}$ is below nominal value, $P_{out,max.}$ will also decrease accordingly because $I_{o,max.}$ is an absolute limit. Thus, $P_{out,max.} = V_{o,set} \times I_{o,max.}$ is also an absolute limit.

6.7 Output Voltage Adjustment


Output may be externally trimmed (+15% to -20%, except 54V_{out} is +10% to -20%) with a fixed resistor or an external trim pot as shown (optional). Model specific formulas for calculating trim resistors are available upon request as a separate document.

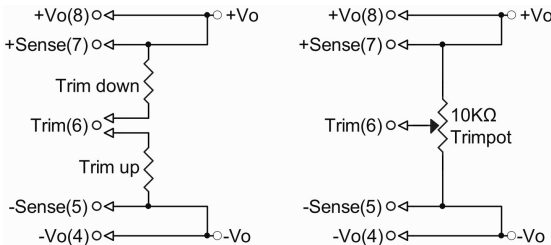

In order to trim the voltage up or down, one needs to connect the trim resistor either between the trim pin and -Sense for trim-up or between trim pin and +Sense for trim-down. The output voltage trim range is +15% to -20%, except 54V_{out}, it is +10% to -20%. This is shown:

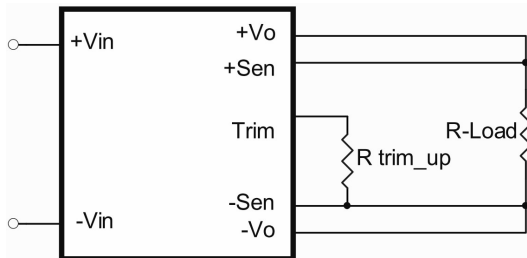

Trim-up Voltage Setup

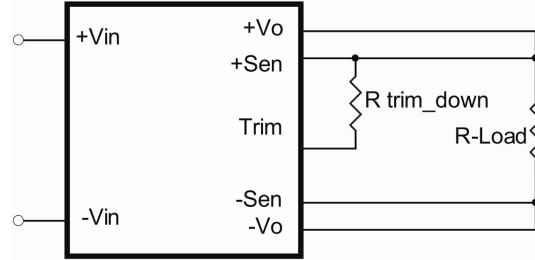

Trim-down Voltage Setup

The value of R_{trim_up} defined as:

$$R_{trim_up} = \left[\frac{V_r \times R1 \times (R2 + R3)}{R2 \times (V_o - V_{o,nom})} \right] - R_t \text{ (K}\Omega\text{)}$$

Where:

R_{trim_up} is the external resistor in K Ω

$V_{o,nom}$ is the nominal output voltage

V_o is the desired output voltage

$R1, R2, R3, R_t$ and V_r are internal to the unit and are defined in Table 1

Table 1 – Trim up and Trim down Resistor Values

Model Number	Output Voltage(V)	R1 (K Ω)	R2 (K Ω)	R3 (K Ω)	Rt (K Ω)	Vr (V)
CQB100W8-36S05	5.0	6.2	2.37	1	8.2	1.24
CQB100W8-36S12	12.0	6.8	2.37	2.2	10	2.5
CQB100W8-36S15	15.0	9.1	2.32	2.49	12	2.5
CQB100W8-36S24	24.0	15	2.43	5.9	20	2.5
CQB100W8-36S28	28.0	15.4	2.49	10	23.2	2.5
CQB100W8-36S48	48.0	28.7	2.4	15	43.2	2.5
CQB100W8-36S54	54.0	36	2.43	14	51	2.5

For example, to trim-up the output voltage of 12V module (CQB100W8-36S12) by 15% to 13.8V, R_{trim_up} is calculated as follows:

$R1=6.8K\Omega, R2=2.37K\Omega, R3=2.2K\Omega, R_t=10K\Omega, V_r=2.5V, V_o=13.8V, V_{o,nom}=12V$

$$R_{trim_up} = \left[\frac{2.5 \times 6.8 \times (2.37 + 2.2)}{2.37 \times (13.8 - 12)} \right] - 10 = 8.2 \text{ (K}\Omega\text{)}$$



CQB100W8 Series

Application V11 March 2025

The typical value of R_{trim_up}

Trim up (%)	5V	12V	15V	24V
	R_{trim_up} (K Ω)			
1%	210.44	263.17	302.45	515.62
2%	101.12	126.59	145.22	247.81
3%	64.68	81.06	92.82	158.54
4%	46.46	58.29	66.61	113.91
5%	35.53	44.63	50.89	87.12
6%	28.24	35.53	40.41	69.27
7%	23.03	29.02	32.92	56.52
8%	19.13	24.15	27.31	46.95
9%	16.09	20.35	22.94	39.51
10%	13.66	17.32	19.44	33.56
11%	11.68	14.83	16.59	28.69
12%	10.02	12.76	14.20	24.64
13%	8.62	11.01	12.19	21.20
14%	7.42	9.51	10.46	18.26
15%	6.38	8.21	8.96	15.71

Trim up (%)	28V	48V	54V
	R_{trim_up} (K Ω)		
1%	666.51	1040.52	1075
2%	321.65	498.66	512.44
3%	206.70	324.63	324.63
4%	149.23	227.73	230.72
5%	114.74	173.54	174.38
6%	91.75	137.42	136.81
7%	75.33	111.62	109.98
8%	63.01	92.27	89.86
9%	53.43	77.21	74.21
10%	45.77	65.17	61.69
11%	39.50	55.32	
12%	34.28	47.11	
13%	29.85	40.16	
14%	26.06	34.21	
15%	22.78	29.05	

Where:

R_{trim_down} is the external resistor in K Ω

$V_{o, nom}$ is the nominal output voltage

V_o is the desired output voltage

R_1 , R_2 , R_3 , R_t and V_r are internal to the unit and are defined in Table 1

For example: to trim-down the output voltage of 12V module (CQB100W8-36S12) by 20% to 9.6V, R_{trim_down} is calculated as follows:

$R_1=6.8K\Omega$, $R_2=2.37K\Omega$, $R_3=2.2K\Omega$, $R_t=10K\Omega$, $V_r=2.5V$, $V_o=9.6V$, $V_{o, nom}=12V$

$$R_{trim_down} = 6.8 \times \left[\frac{2.5 \times 6.8}{2.37 \times (12 - 9.6)} - 1 \right] - 10$$

$$= 3.52 \text{ (K}\Omega\text{)}$$

The typical value of R_{trim_down}

Trim down (%)	5V	12V	15V	24V
	R_{trim_down} (K Ω)			
1%	387.84	389.67	573.80	929.51
2%	186.72	186.43	276.35	447.25
3%	119.68	118.69	177.20	286.50
4%	86.16	84.82	127.62	206.13
5%	66.05	64.49	97.88	157.90
6%	52.64	50.94	78.05	125.75
7%	43.06	41.27	63.89	102.79
8%	35.88	34.01	53.26	85.56
9%	30.29	28.36	45.00	72.17
10%	25.82	23.85	38.39	61.45
11%	22.17	20.15	32.98	52.68
12%	19.12	17.07	28.47	45.38
13%	16.54	14.47	24.66	39.19
14%	14.33	12.23	21.39	33.89
15%	12.42	10.30	18.56	29.30
16%	10.74	8.60	16.08	25.28
17%	9.26	7.11	13.89	21.74
18%	7.95	5.78	11.95	18.58
19%	6.77	4.59	10.21	15.76
20%	5.71	3.52	8.64	13.23

The value of R_{trim_down} defined as:

$$R_{trim_down} = R_1 \times \left[\frac{V_r \times R_1}{R_2 \times (V_{o, nom} - V_o)} - 1 \right] - R_t \text{ (K}\Omega\text{)}$$



CQB100W8 Series


Application V11 March 2025

Trim down (%)	28V	48V	54V
	R _{trim_down} (KΩ)		
1%	811.80	1715.62	2382.14
2%	386.60	821.86	1147.57
3%	244.87	523.94	736.05
4%	174.00	374.98	530.28
5%	131.48	285.6	406.83
6%	103.13	226.02	324.52
7%	82.89	183.46	265.73
8%	67.70	151.54	221.64
9%	55.89	126.71	187.35
10%	46.44	106.85	159.91
11%	38.71	90.6	137.47
12%	32.27	77.06	118.76
13%	26.82	65.6	102.93
14%	22.14	55.78	89.37
15%	18.09	47.27	77.61
16%	14.55	39.82	67.32
17%	11.42	33.25	58.24
18%	8.64	27.41	50.17
19%	6.16	22.18	42.95
20%	3.92	17.48	36.46

7. Input/Output Considerations

7.1 Input Capacitance at the Power Module

The converters must be connected to low AC source impedance. To avoid problems with loop stability source inductance should be low. Also, the input capacitors (C_{in}) should be placed close to the converter input pins to decouple distribution inductance. However, the external input capacitors are chosen for suitable ripple handling capability. Low ESR capacitors are a good choice. The circuit shown below represents typical measurement methods for reflected ripple current. C₁ and L₁ simulate a typical DC source impedance. The input reflected-ripple current is measured by current probe to oscilloscope with a simulated source Inductance (L₁).

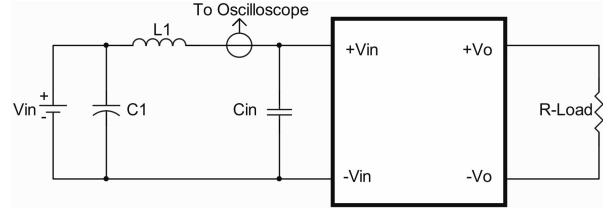

L₁: 12uH


C₁: 470uF/100V ESR<0.04Ω

C_{in}: Two pcs 470uF/100V ESR<0.04Ω aluminum capacitor in parallel

7.2 Hold Up Time

Hold up time is defined as the duration of time that the DC/DC converter output will remain active following a loss of input power. The BUS pin is for hold up time function. It is designed to work with an external circuit comprises C₅. When input power supply is interrupt, the CQB100W8-36S series use the energy stored in C₅ to support operation.

A typical configuration shows as below.

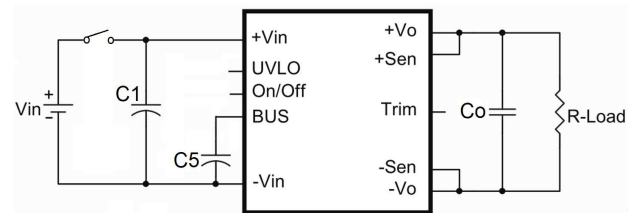

C₁: 470uF/200V ESR<0.04Ω

If hold up time function is not needed, please remove the component(C₅). This function provides energy that maintains the DC-DC converter in operation for 10mS and 30mS hold up time. The capacity (C₁&C₅) in the application is recommended as below.


V _{in}		24V	36V	48V
For 10 mS	C ₁	470uF		
	C ₅	15000uF	10000uF	10000uF
For 30 mS	C ₁	470uF		
	C ₅	36600uF	22200uF	22200uF



CQB100W8 Series

Application V11 March 2025

7.3 Output Ripple and Noise

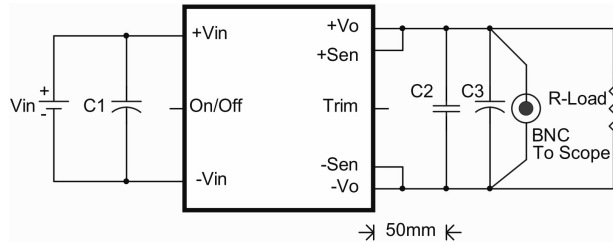


C1: 470uF/100V ESR<0.04Ω

C2: 1uF/1210 ceramic capacitor


C3: 10uF polymer tantalum capacitor (ESR ≤ 0.05Ω)

Output ripple and noise measured with 10uF polymer tantalum capacitor and 1uF ceramic capacitors across output. A 20 MHz bandwidth oscilloscope is normally used for the measurement.

The conventional ground clip on an oscilloscope probe should never be used in this kind of measurement. This clip, when placed in a field of radiated high frequency energy, acts as an antenna or inductive pickup loop, creating an extraneous voltage that is not part of the output noise of the converter.

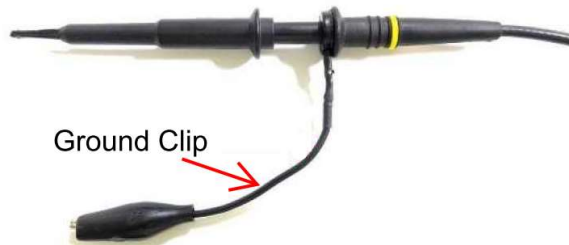

Another method is shown below, in case of coaxial cable/BNC is not available. The noise pickup is eliminated by pressing scope probe ground ring directly against the $-V_{out}$ terminal while the tip contacts the $+V_{out}$ terminal. This makes the shortest possible connection across the output terminals.

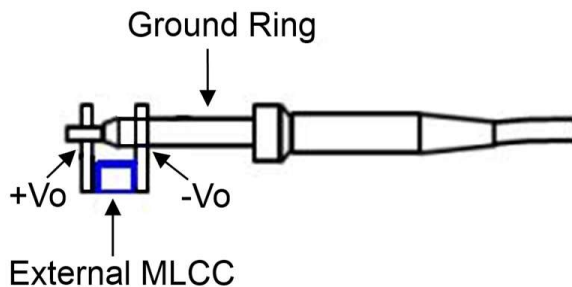


7.5 Output Capacitance

The CQB100W8 series converters provide unconditional stability with or without external capacitors. For good transient response, low ESR output capacitors should be located close to the point of load (<100mm). PCB design emphasizes low resistance and inductance tracks in consideration of high current applications. Output capacitors with their associated ESR values have an impact on loop stability and bandwidth. Cincon's converters are designed to work with load capacitance to see specifications.

8. Series and Parallel Operation

8.1 Series Operation

Series operation is possible by connecting the outputs two or more units. Connection is shown below. The output current in series connection should be lower than the lowest rate current in each power module.

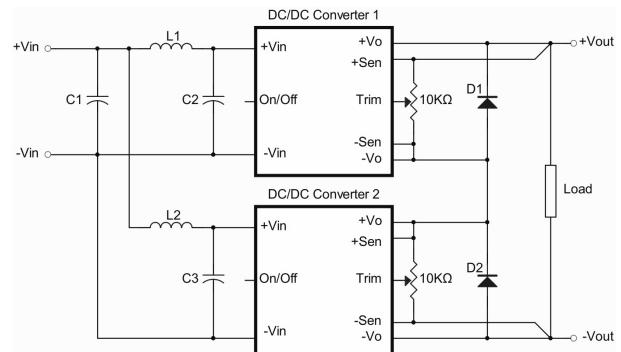

Simple Series Operation Connect Circuit

L1, L2: 1.0uH

C1, C2, C3: 470uF/100V ESR<0.04Ω

Note:


1. If the impedance of input line is high, C1, C2, C3 capacitance must be more than above. Use more than two recommended capacitor above in parallel when ambient temperature becomes lower than -20°C.
2. Recommend Schottky diode (D1, D2) be connected across the output of each series connected converter, so that if one converter shuts down for any reason, then the output stage won't be thermally overstressed. Without this external diode, the output stage of the shut-down converter could carry the load current provided by the other series converters, with its MOSFETs conducting through the body diodes. The MOSFETs could then be overstressed and fail. The external diode should be capable of handling the full load current for as long as the application is expected to run with any unit shut down.



CQB100W8 Series

Application V11 March 2025

Series for $\pm$ output operation is possible by connecting the outputs two units, as shown in the schematic below.

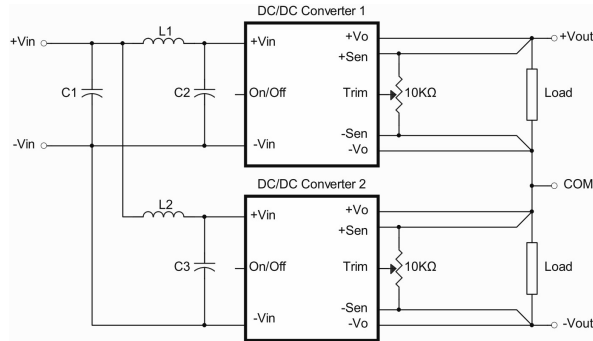

Simple $\pm$ Output Operation Connect Circuit

L1, L2: 1.0uH

C1, C2, C3: 470uF/100V ESR<0.04Ω

Note:


If the impedance of input line is high, C1, C2, C3 capacitance must be more than above. Use more than two recommended capacitor above in parallel when ambient temperature becomes lower than -20°C.

8.2 Parallel Operation

The CQB100W8 series parallel operation is not possible.

8.3 Redundant Operation

Parallel for redundancy operation is possible by connecting the units as shown in the schematic below. The current of each converter becomes unbalanced by a slight difference of the output voltage. Make sure that the output voltage of units of equal value and the output current from each power supply does not exceed the rate current. Suggest use an external potentiometer to adjust output voltage from each power supply.

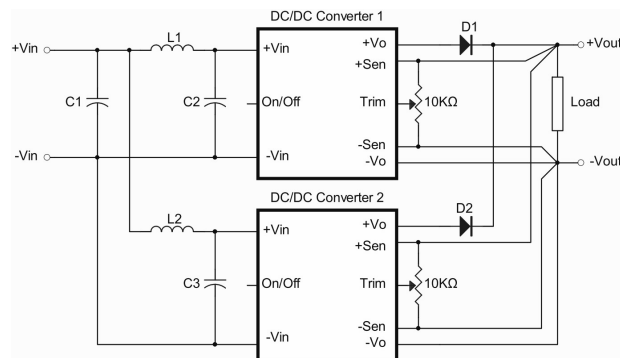

Simple Redundant Operation Connect Circuit

L1, L2: 1.0uH

C1, C2, C3: 470uF/100V ESR<0.04Ω

Note:

If the impedance of input line is high, C1, C2, C3 capacitance must be more than above. Use more than two recommended capacitor above in parallel when ambient temperature becomes lower than -20°C.



CQB100W8 Series

Application V11 March 2025

9. Thermal Design

9.1 Operating Temperature Range

The CQB100W8 series converters can be operated within a wide case temperature range of -40°C to 105°C . Consideration must be given to the derating curves when ascertaining maximum power that can be drawn from the converter. The maximum power drawn from open quarter brick models is influenced by usual factors, such as:

- Input voltage range
- Output load current
- Forced air or natural convection
- Heat sink optional

9.2 Convection Requirements for Cooling

To predict the approximate cooling needed for the quarter brick module, refer to the power derating curves in **section 9.4**. These derating curves are approximations of the ambient temperatures and airflows required to keep the power module temperature below its maximum rating. Once the module is assembled in the actual system, the module's temperature should be monitored to ensure it does not exceed 105°C as measured at the center of the top of the case (thus verifying proper cooling).


9.3 Thermal Considerations

The power module operates in a variety of thermal environments; however, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. The example is presented in **section 9.4**. The power output of the module should not be allowed to exceed rated power ($V_{o_set} \times I_{o_max.}$).

9.4 Power Derating

The operating case temperature range of CQB100W8 series is -40°C to $+105^{\circ}\text{C}$. When operating the CQB100W8 series, proper derating or cooling is needed. The maximum case temperature under any operating condition should not exceed 105°C .

The following curve is the de-rating curve of CQB100W8 series without heat sink.

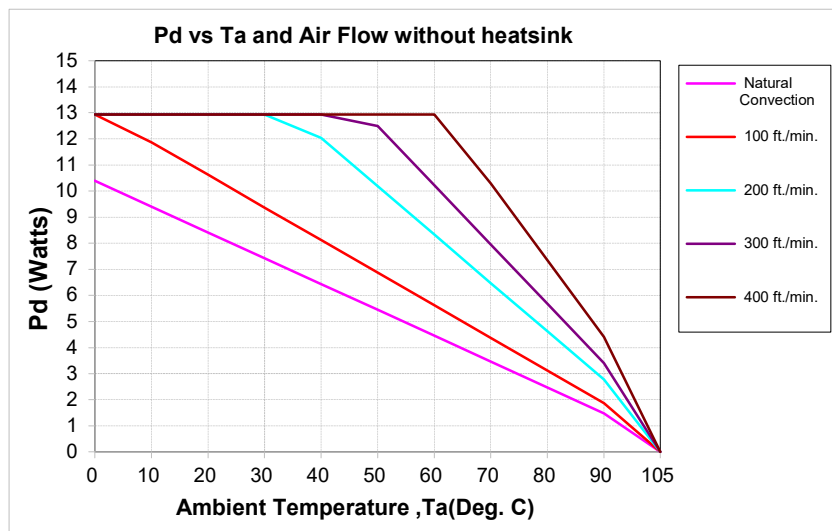

AIR FLOW RATE	TYPICAL R_{ca}
Natural Convection 20ft./min. (0.1m/s)	10.1 $^{\circ}\text{C}/\text{W}$
100 ft./min. (0.5m/s)	8.0 $^{\circ}\text{C}/\text{W}$
200 ft./min. (1.0m/s)	5.4 $^{\circ}\text{C}/\text{W}$
300 ft./min. (1.5m/s)	4.4 $^{\circ}\text{C}/\text{W}$
400 ft./min. (2.0m/s)	3.4 $^{\circ}\text{C}/\text{W}$



CQB100W8 Series

Application V11 March 2025

Example:

What is the minimum airflow necessary for a CQB100W8-36S12 operating at nominal line voltage, an output current of 12.5A, and a maximum ambient temperature of 40°C?

Solution:

Given: $V_{in}=36V_{dc}$, $V_o=12V_{dc}$, $I_o=8.3A$

Determine power dissipation (P_d): $P_d=P_i-P_o=P_o(1-\eta)/\eta$, $P_d=12 \times 8.3 \times (1-0.885)/0.885=12.94Watts$

Determine airflow: Given: $P_d=12.94W$ and $T_a=60^\circ C$

Check power derating curve: Minimum airflow=400ft./min.

Verify:


Maximum temperature rise is $\Delta T=P_d \times R_{ca}=12.94 \times 3.4=43.996^\circ C$

Maximum case temperature is $T_c=T_a+\Delta T=103.996^\circ C < 105^\circ C$

Where:

The R_{ca} is thermal resistance from case to ambient environment

T_a is ambient temperature and T_c is case temperature

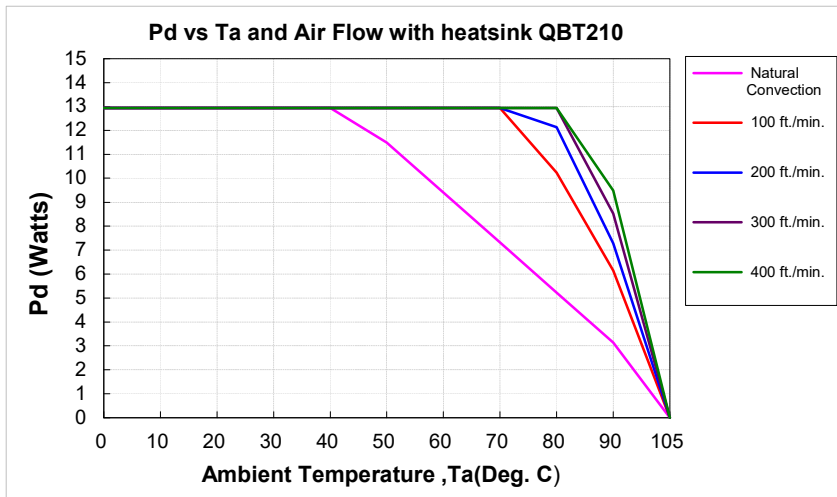

AIR FLOW RATE	TYPICAL R_{ca}
Natural Convection 20ft./min. (0.1m/s)	4.78 °C/W
100 ft./min. (0.5m/s)	2.44 °C/W
200 ft./min. (1.0m/s)	2.06 °C/W
300 ft./min. (1.5m/s)	1.76 °C/W
400 ft./min. (2.0m/s)	1.58 °C/W

Example with heat sink QBT210 (M-C421):

What is the minimum airflow necessary for a CQB100W8-36S12 operating at nominal line voltage, an output current of 8.3A, and a maximum ambient temperature of 60°C?

Solution:

Given: $V_{in}=36V_{dc}$, $V_o=12V_{dc}$, $I_o=8.3A$

Determine power dissipation (P_d): $P_d= P_i-P_o=P_o(1-\eta)/\eta$, $P_d=12 \times 8.3 \times (1-0.885)/0.885=12.94Watts$

Determine airflow: Given: $P_d=12.94W$ and $T_a=70^\circ C$

Check above power derating curve: Minimum airflow=100ft./min

Verify:

Maximum temperature rise is $\Delta T= P_d \times R_{ca}=12.94 \times 2.44=31.5736^\circ C$

Maximum case temperature is $T_c=T_a+\Delta T=101.5736^\circ C < 105^\circ C$

Where:

The R_{ca} is thermal resistance from case to ambient environment

T_a is ambient temperature and T_c is case temperature



CQB100W8 Series

Application V11 March 2025


9.5 Quarter Brick Heat Sinks

Heat sinks assembly [refer to Datasheet-Thermal](#)

10. Safety & EMC

10.1 Input Fusing and Safety Considerations

The CQB100W8 series converters have no internal fuse. In order to achieve maximum safety and system protection, always use an input line fuse. We recommended a 16A time delay fuse for all models. It is recommended that the circuit have a transient voltage suppressor diode (TVS) across the input terminal to protect the unit against surge or spike voltage and input reverse voltage (as shown).

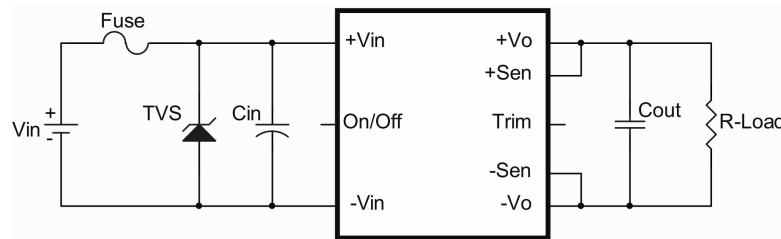

The external input capacitor (Cin) and transient voltage suppressor diode (TVS) are required if CQB100W8 series has to meet EN 61000-4-4, EN 61000-4-5.

The Cin recommended a 470uF/100V (Nippon Chemi-Con KY series) aluminum capacitor. And the TVS recommended a SMDJ78CA transient voltage suppressor.

10.2 EMC Considerations

EMI Test standard: EN 55032 Class A/EN 50121-3-2:2016 Conducted & Radiated Emission

Test Condition: Input Voltage: 36Vdc, Output Load: Full Load

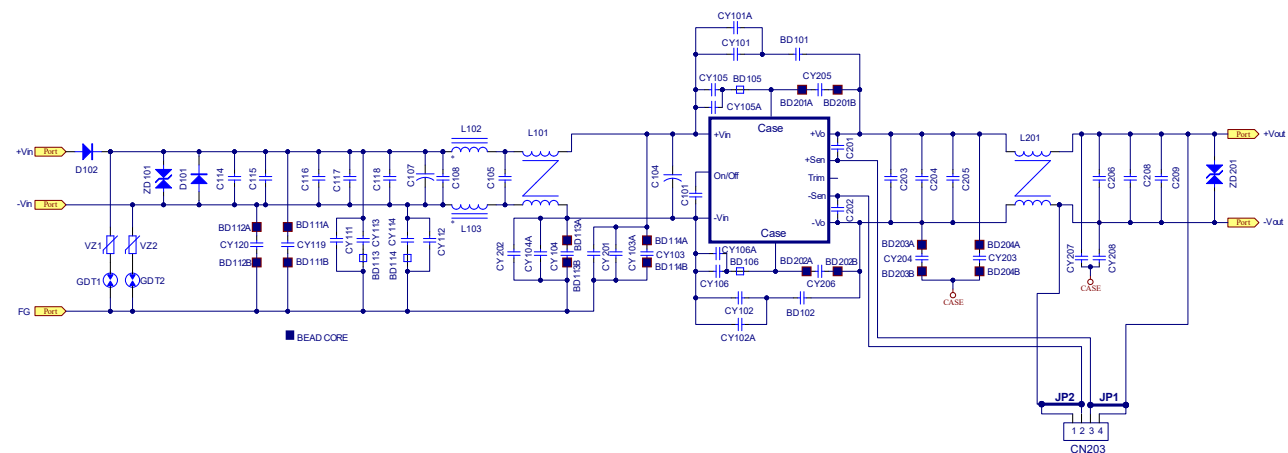


Figure1 Connection Circuit



CQB100W8 Series **Application V11 March 2025**

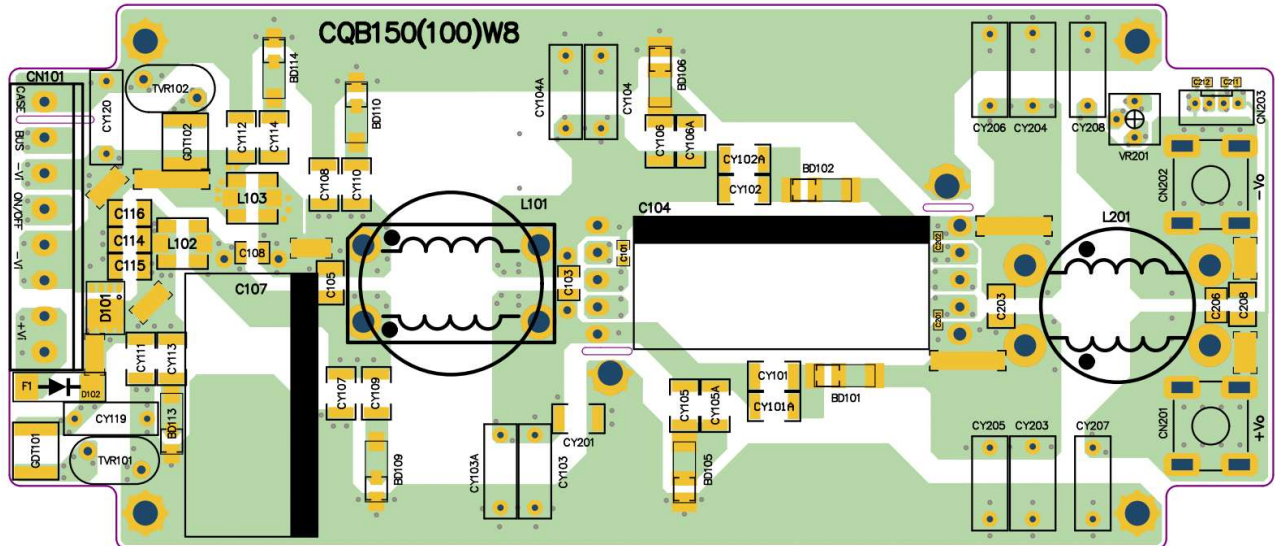


Figure2 PCB Layout Top View

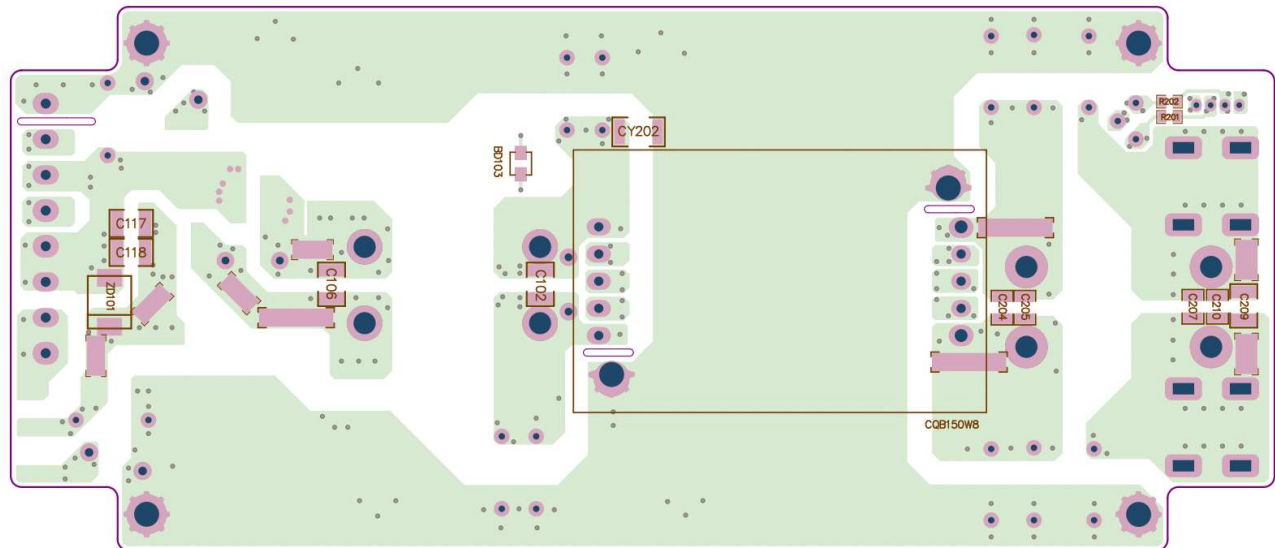


Figure3 PCB Layout Bottom View



CQB100W8 Series

Application V11 March 2025

Components value:

	Model Number						
DC/DC	36S05	36S12	36S15	36S24	36S28	36S48	36S54
C101	0.1uF/100V						
C105	4.7uF/100V X7R						
C108	NC	2.2uF/100V	NC			2.2uF/100V	
C114	4.7uF/100V X7R					2.2uF/100V	
C115	4.7uF 100V X7R			NC		NC	
C116						4.7uF/100V X7R	
C117, C118	NC	4.7uF 100V X7R	NC				
C104, C107	470uF/100V SUSCON						
C203, C208, C209	33uF/16V	22uF/25V		6.8uF/50V		4.7uF/100V	
C204, C205, C206	47uF/6.3V	22uF/25V		10uF/50V		2.2uF/100V	
CY107, CY108 CY113, CY114	NC			560pF			
CY119	220pF	470pF	100pF				
BD111A, BD111B	A8H035030015			A6B T4.1*1.5*2			
CY120	680pF	1500pF	680pF	470pF			330pF
BD112A, BD112B	A8H035030015			A6B T4.1*1.5*2			
CY103, CY104	4700pF						
BD113A,BD113B BD114A,BD114B	A6B T4.1*1.5*2						
CY103A, CY104A	NC					4700pF	
CY101, CY101A, CY102 CY102A, CY105, CY106	2200pF						
CY105A, CY106A	2200pF			NC		2200pF	
CY201, CY202	NC	2200pF	NC				
CY203, CY204	4700pF					0.01uF	
BD203A,BD203B BD204A,BD204B	A6B T4.1*1.5*2						
CY205, CY206	NC		3300pF				
BD201A, BD201B BD202A, BD202B	NC		A6B T4.1*1.5*2				
CY207, CY208	4700pF	0.01uF				0.022uF	
BD103	BPH323023W5-400T-NB						
L101	0.7mmx3x10T 5.7mH						
L102, L103	6.8uH		SHORT				
L201	0.8mm*4/4 T 0.52mH	0.8mm*2/8T 2mH				0.55mm*2/13T 5.45mH	
BD101, BD102	BPH853025WR5-101T-NB						
BD105, BD106	Short	742792510 WURTH	Short	BPH853025WR5-101T- NB		Short	



CQB100W8 Series

Application V11 March 2025

	Model Number						
DC/DC	36S05	36S12	36S15	36S24	36S28	36S48	36S54
BD113, BD114	NC	NC	NC	BPH853025WR5-101T-NB			
D101	STTH30R02DJF-TR						
D102	STPS30170DJF-TR						
ZD101, ZD201	SMDJ78CA						
VZ1, VZ2	TVR10471KIC7AV						
GDT1, GDT2	2RK2500M-5-SS						

Note:

BD101, BD102, BD113, BD114: BPH853025WR5-101T-NB TAI-TECH or equivalent
 BD103: BPH323023W5-400T-NB or equivalent
 BD105, BD106: BPH853025WR5-101T-NB TAI-TECH or equivalent for 24V, 28V_{out}, 742792510 Würth or equivalent for 12V_{out}
 others short
 BD111A, BD111B, BD112A, BD112B: A8H035030015 EROCORE or equivalent for 5V, 12V, 15V_{out},
 others A6B T 4*1.5*2 KING CORE or equivalent
 BD113A, BD113B, BD114A, BD114B, BD201A, BD201B, BD202A, BD202B, BD203A, BD203B, BD204A, BD204B:
 A6B T 4*1.5*2 KING CORE or equivalent
 C105, C114, C115, C116, C117, C118, C203, C208, C209: SMD CAP X7R 1812 or equivalent
 C104, C107: 470uF/100V ALUMINUM CAP SUSCON SDN series or equivalent
 C108, C204, C205, C206: SMD CAP X7R 1210 or equivalent
 CY103, CY103A, CY104, CY104A, CY119, CY120, CY205, CY206: Y1 CAP DIP TDK or equivalent
 CY203, CY204: Y1 CAP DIP TDK for 5V, 12V, 15V, 24V, 28V_{out}, others X2 CAP HJC MKP series 223K0275AB1101 or equivalent
 CY207, CY208: Y1 CAP DIP TDK for 5V_{out}, others X2 CAP HJC MKP series 223K0275AB1101 or equivalent
 CY101, CY102, CY101A, CY102A, CY105, CY105A, CY106, CY106A: SMD Y2 CAP 2211 or equivalent
 CY107, CY108, CY113, CY114: SMD CAP X7R 1808 or equivalent
 VZ1, VZ2: TVR10471KIC7AV TKS or equivalent
 GDT1, GDT2: 2RK2500M-5-SS YAGEO or equivalent
 D101: STTH30R02DJF-TR ST or equivalent
 D102: STPS30170DJF-TR ST or equivalent
 ZD101, ZD201: SMDJ78CA Littlefuse or equivalent
 L101: TMC20-12.5-12-C(P) NANOCRYSTALLINE TECH MOUNT or equivalent
 L102, L103: 6.8uH SMD or equivalent
 L201: SYG1HN 181306P BJ-SHOUYE or equivalent
 CN101: TERMINAL BLOCK UL 5.0mm EK500V-08P 300V 20A DINLE or equivalent
 CN201, CN202: P-831N DINKLE or equivalent
 CN203: WAFER DIP AC-DC Nylon UL 94V-0 P110I-04 180° 2.0mm 4PIN KP or equivalent
 MINI JUMPER HMJ20-02O-95BS 2.0mm TKP or equivalent: Using in CN203
 NC: No connection




CQB100W8 Series

Application V11 March 2025


Conducted Emission (EN55032 Class A / EN 50121-3-2 Input conduction):

CQB100W8-36S05

Line

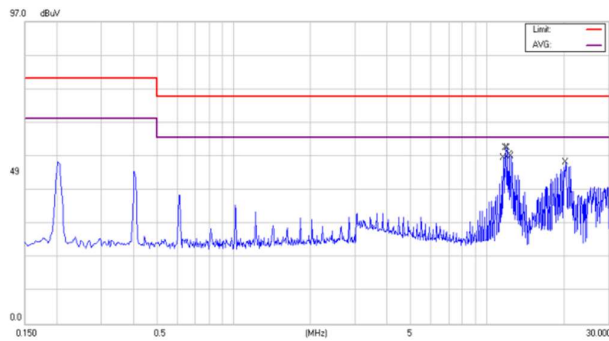


Neutral

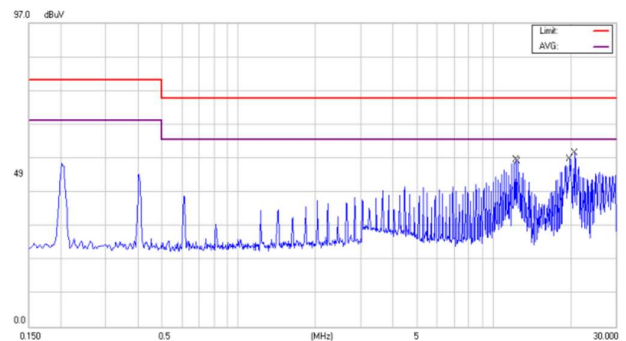


CQB100W8-36S12

Line

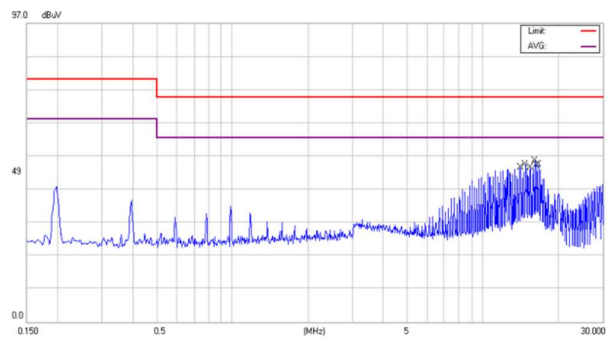


Neutral

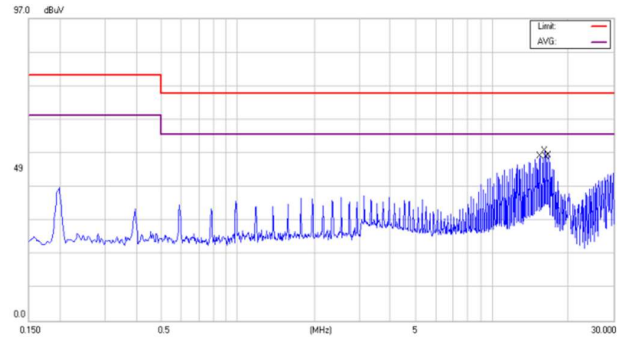


CQB100W8-36S15

Line

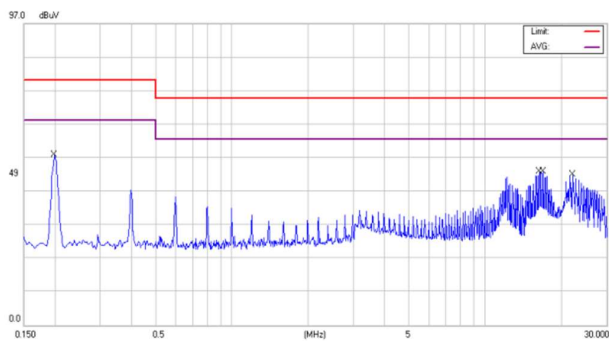

Neutral

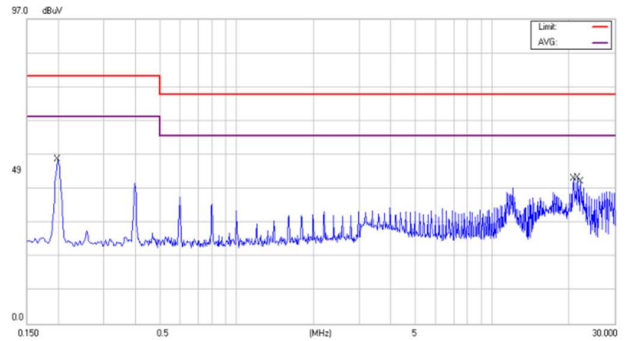




CQB100W8 Series


Application V11 March 2025

CQB100W8-36S24

Line

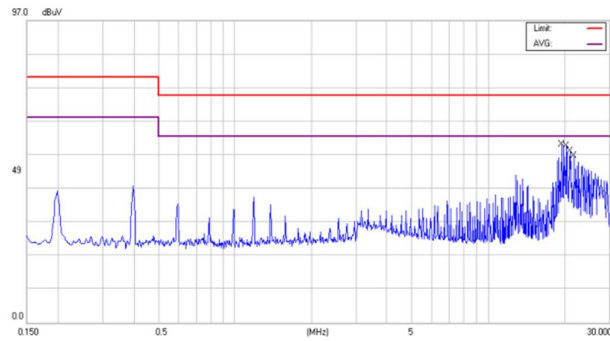


Neutral

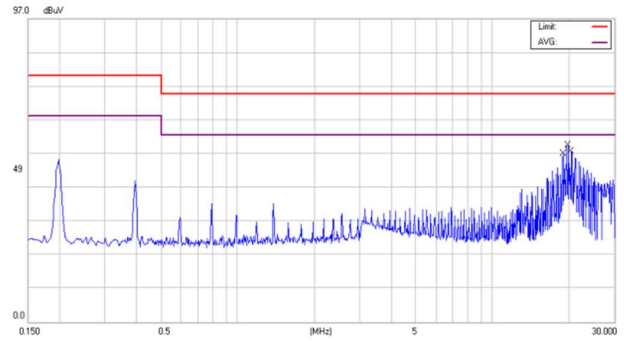


CQB100W8-36S28

Line

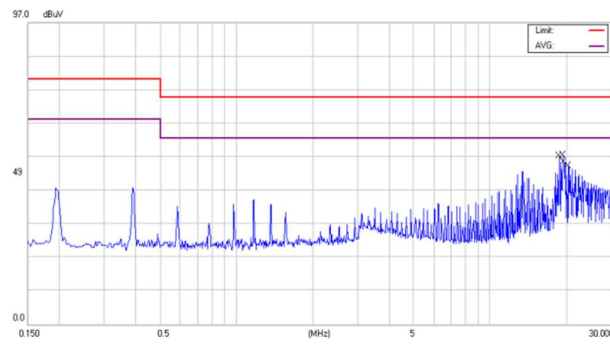


Neutral

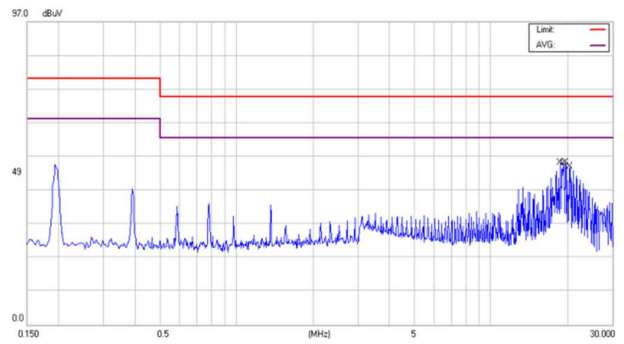


CQB100W8-36S48

Line

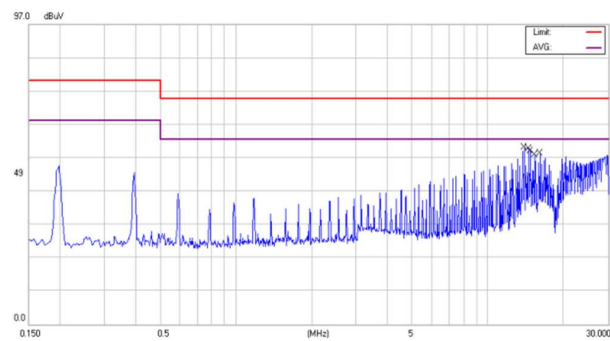

Neutral

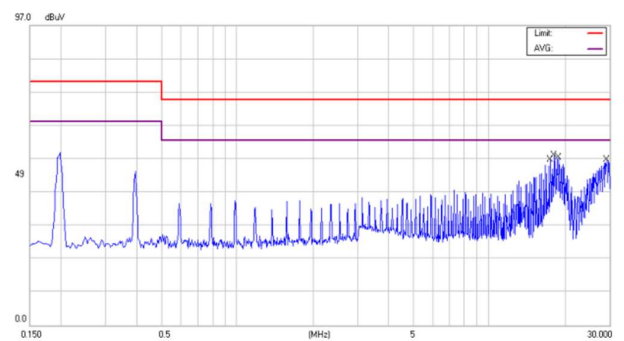




CQB100W8 Series


Application V11 March 2025

CQB100W8-36S54

Line

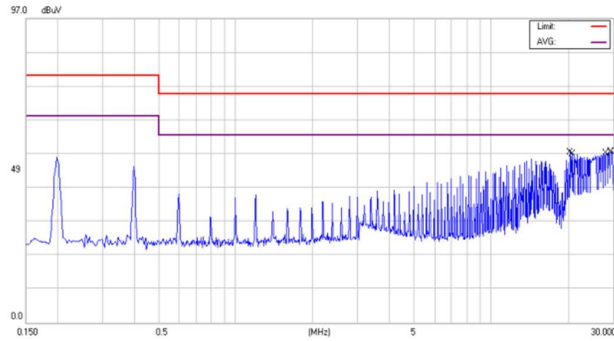


Neutral

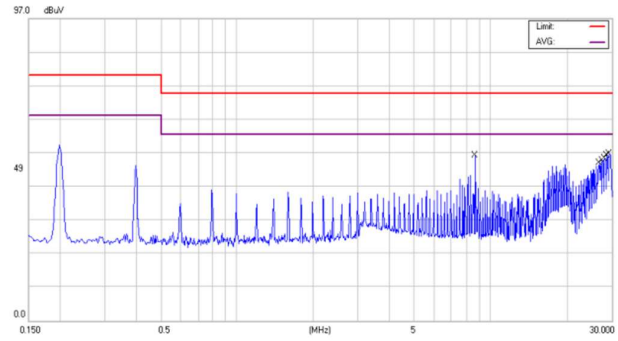


Conducted Emission (EN 50121-3-2 Output Conduction):

CQB100W8-36S05

Positive

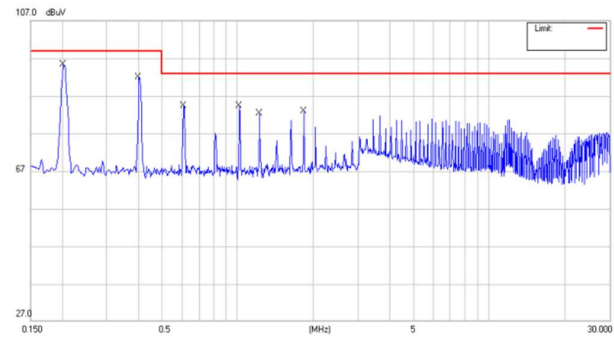


Negative

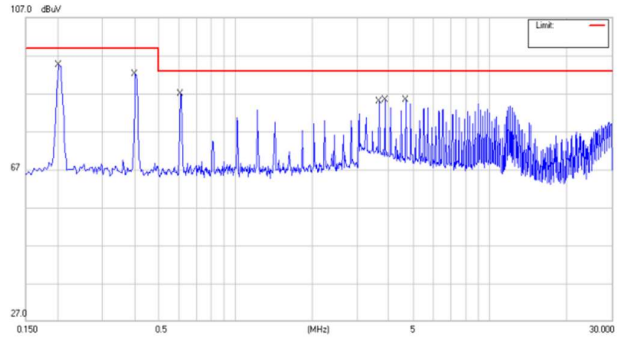


CQB100W8-36S12

Positive

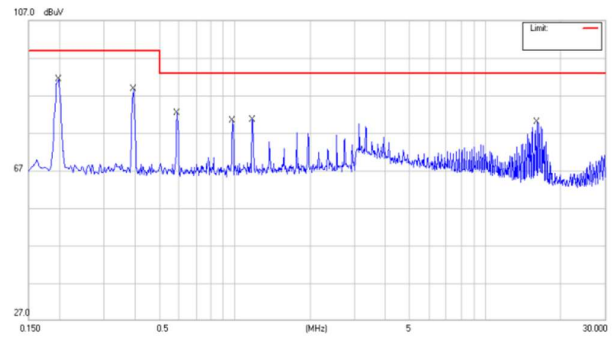

Negative

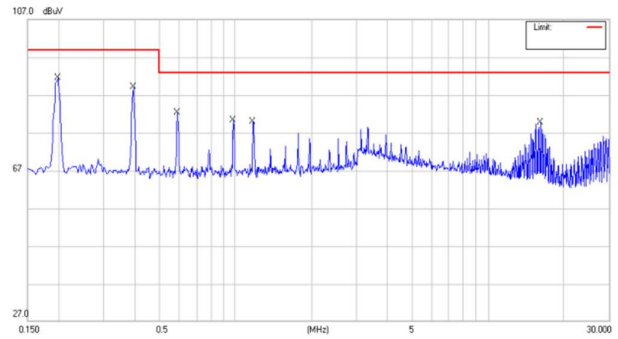




CQB100W8 Series


Application V11 March 2025

CQB100W8-36S15

Positive

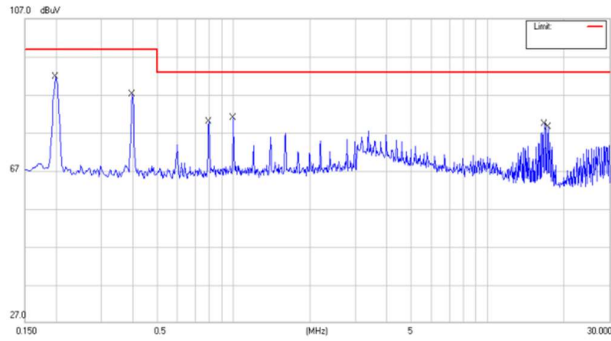


Negative

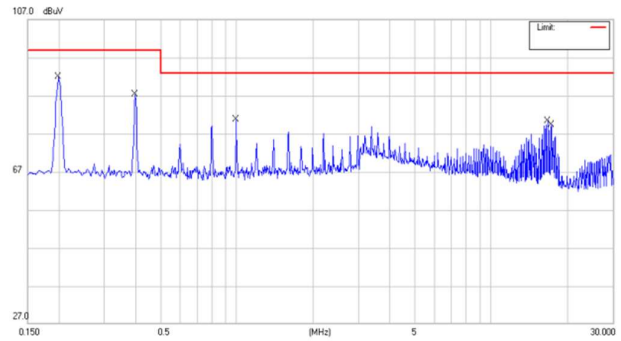


CQB100W8-36S24

Positive

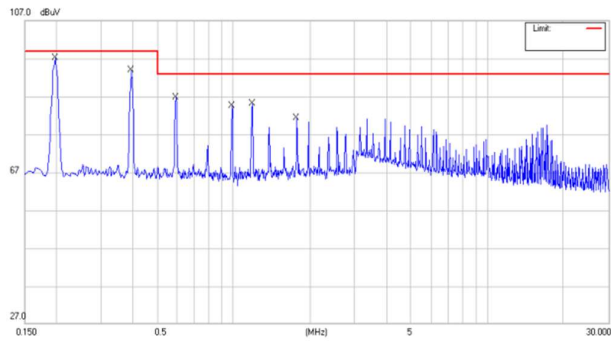


Negative

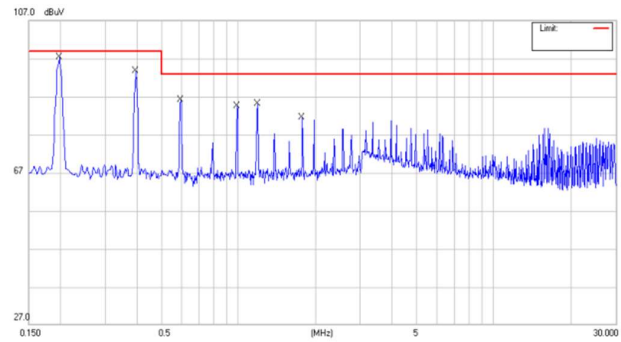


CQB100W8-36S28

Positive

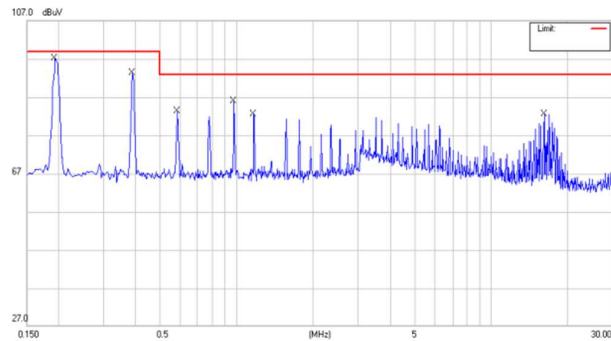

Negative

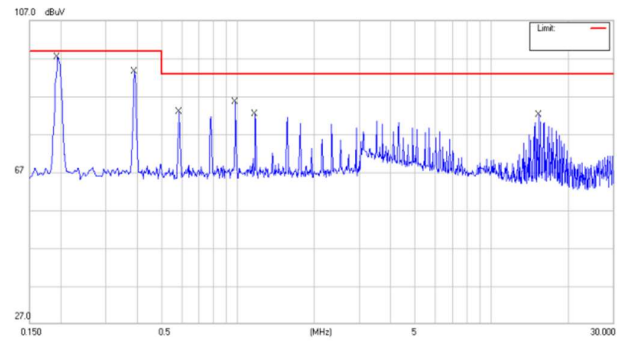




CQB100W8 Series


Application V11 March 2025

CQB100W8-36S48

Positive

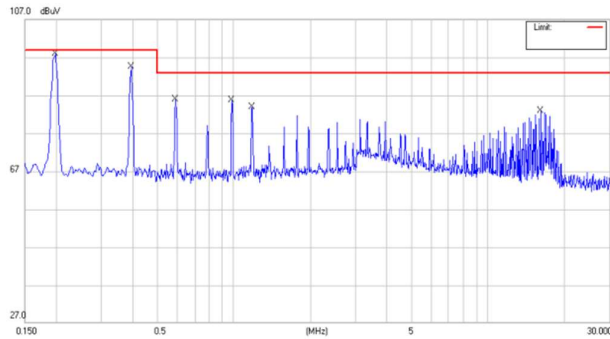


Negative

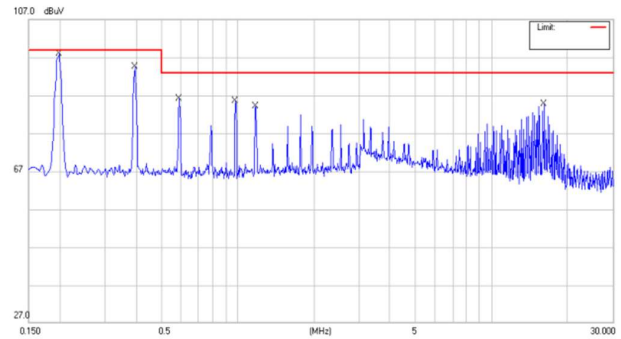


CQB100W8-36S54

Positive

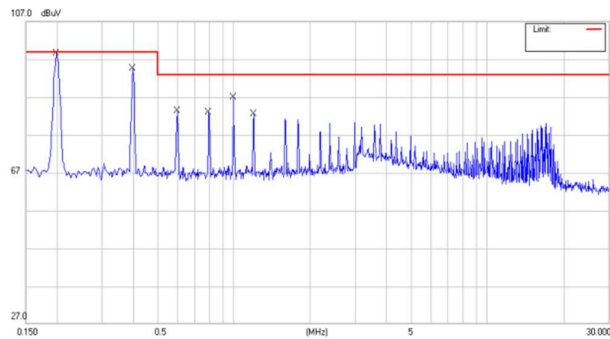


Negative

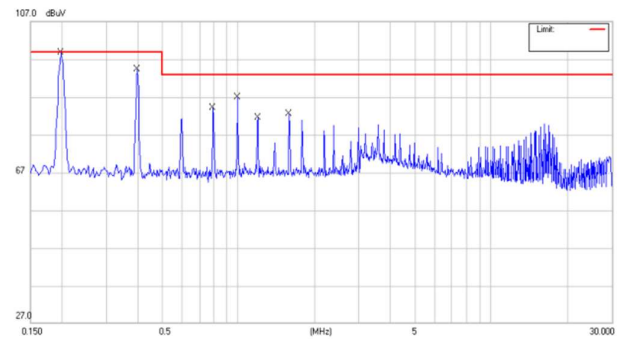


Radiated Emission (EN55032 Class A / EN 50121-3-2):

CQB100W8-36S05

Vertical

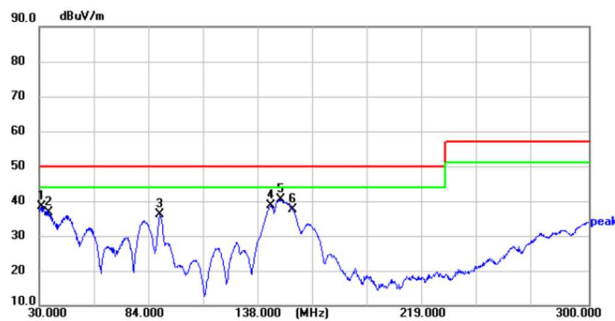

Horizontal

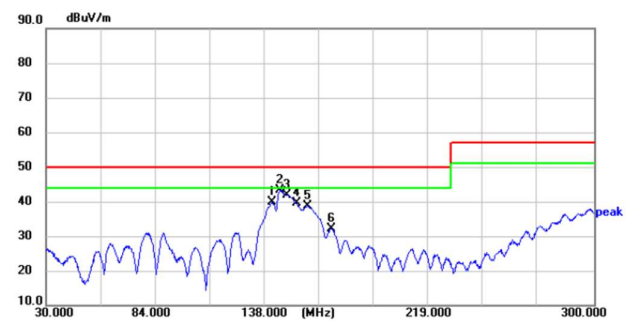




CQB100W8 Series


Application V11 March 2025

CQB100W8-36S12

Vertical

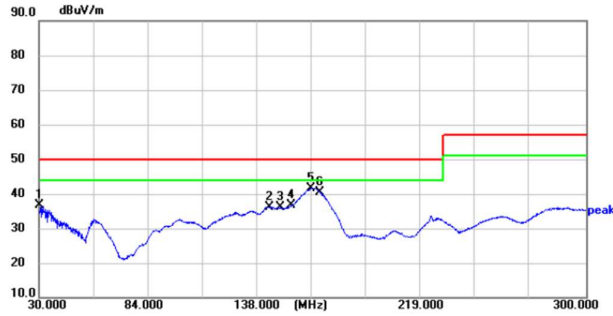


Horizontal

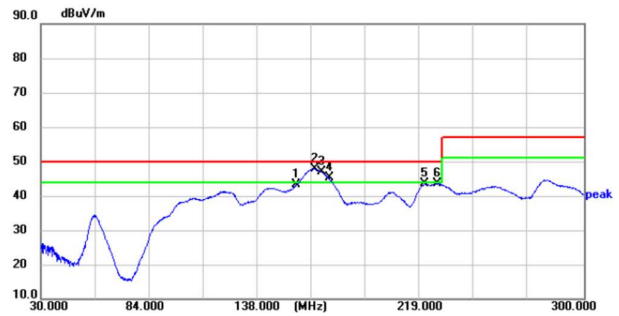


CQB100W8-36S15

Vertical

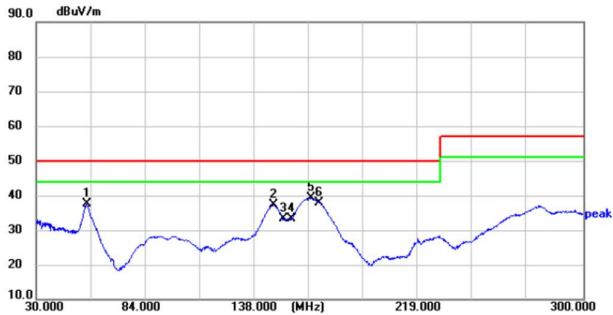


Horizontal

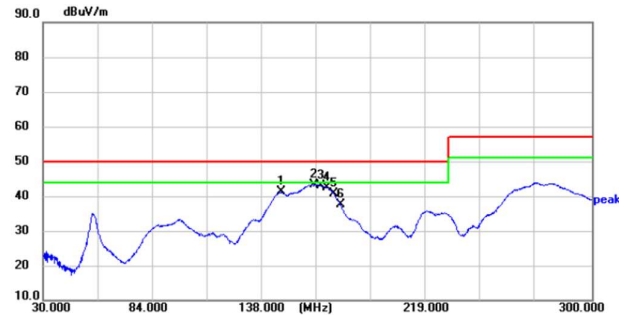


CQB100W8-36S24

Vertical

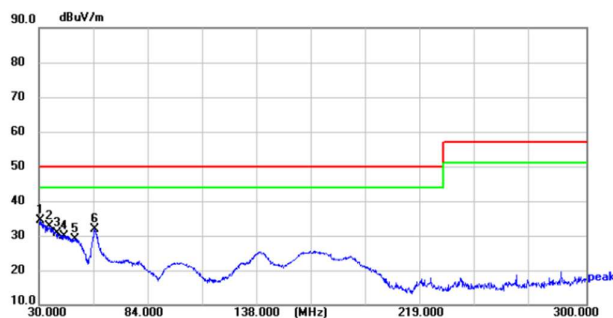

Horizontal

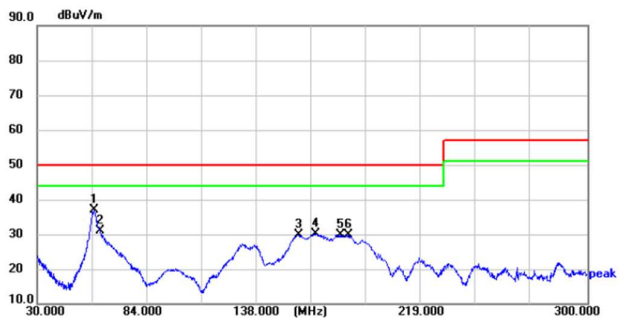




CQB100W8 Series


Application V11 March 2025

CQB100W8-36S28

Vertical

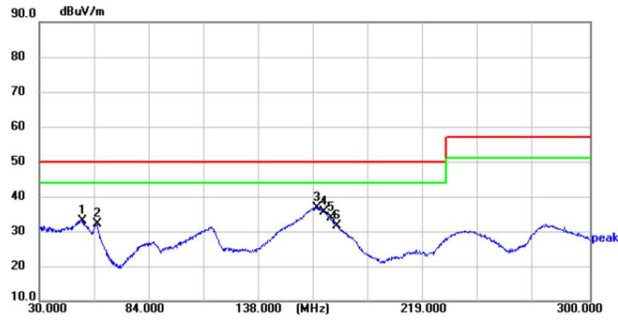


Horizontal

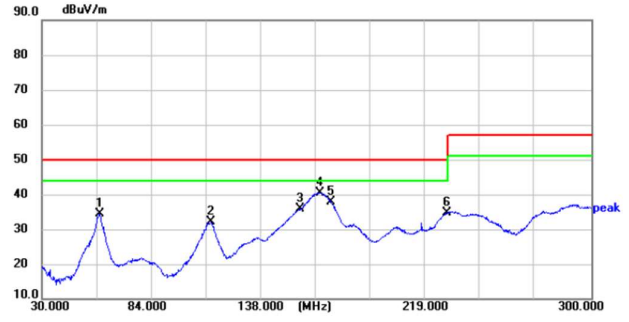


CQB100W8-36S48

Vertical

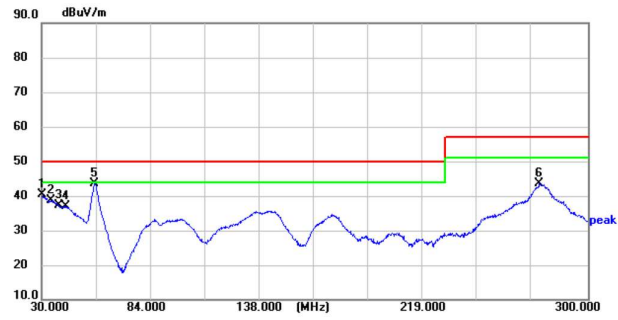


Horizontal

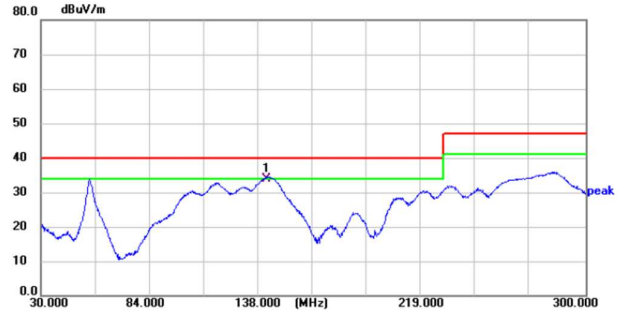


CQB100W8-36S54

Vertical

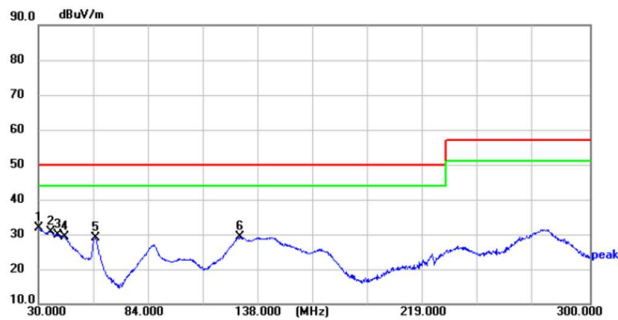


Horizontal

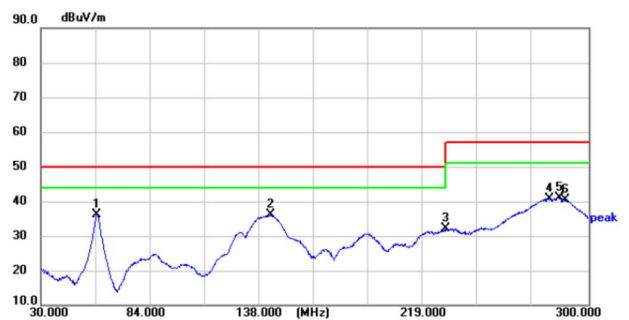



Test Condition: Input Voltage: 36Vdc, Output Load: Full Load





CQB100W8 Series

Application V11 March 2025

Components value:

	Model Number						
DC/DC	36S05	36S12	36S15	36S24	36S28	36S48	36S54
C103, C108, C109	2.2uF/100V X7R 1210						
C104, C107, C113	470uF/100V SUSCON						
C105, C111, C112, C114	4.7uF/100V X7R 1812						
C204, C205	47uF/6.3V 1210	NC		NC		NC	
C206	47uF/6.3V 1210	22uF/25V 1210		10uF/50V 1210		2.2uF/100V X7R 1210	
C207, C210	NC	22uF/25V 1210		10uF/50V 1210		2.2uF/100V X7R 1210	
C203, C209	33uF/16V 1812	22uF/25V 1812		6.8uF/50V 1812		4.7uF/100V X7R 1812	
C208	1uF/250V 1812						
CY101, CY102, CY105, CY106	2200pF 2211						
CY105A, CY106A	NC			2200pF 2211			
CY103, CY104	4700pF					4700pF	
BD113A,BD113B BD114A,BD114B	A6B T4*1.5*2						
CY103A, CY104A	NC					4700pF	
BD115A,BD115B BD116A,BD116B	NC					A6B T4*1.5*2	
CY203, CY204	4700pF					0.022uH HJC	
BD203A,BD203B BD204A,BD204B	A6B T4*1.5*2					NC	
CY109, CY110	1000pF 2211					2200pF 2211	
CY113, CY114	680pF 1808			680pF 1808		2200pF 2211	
CY119	100pF			220pF		220pF	
BD111A,BD111B	A6B T4*1.5*2						
CY120	680pF	330pF		680pF		680pF	
BD112A,BD112B	A6B T4*1.5*2						
CY201, CY202	BPH85302 5R5-101T	1000pF 2211		2200pF 2211			
CY205, CY206	NC			4700pF		100pF	
BD201A,BD201B BD202A,BD202B	NC					A6B T4*1.5*2	
CY207, CY208	4700pF	0.01uH HJC		0.015uH HJC		0.022uH HJC	
BD205A,BD205B BD206A,BD206B	A6B T4*1.5*2	NC					
BD105, BD106	BPH853025R5-101T			SHORT	BPH85302 5R5-101T	SHORT	
BD109, BD110 BD113, BD114	BPH853025R5-101T						
L101, L102	0.7mmx3/10T 4.6mH						
L201	0.8mm*4/4 0.52mH	0.8mm*2/8T 2mH				0.7mm*1/20T 13mH SYG1HN	



CQB100W8 Series

Application V11 March 2025

	Model Number						
DC/DC	36S05	36S12	36S15	36S24	36S28	36S48	36S54
D101	STTH30R02DJF-TR						
F1	SHORT						
ZD101, ZD201	SMDJ78CA						
VZ1, VZ2	TVR10471KIC7AV						
GDT1, GDT2	2RK2500M-5-SS						

Note:

BD105, BD106, BD109, BD110, BD113, BD114: BPH853025WR5-101T-NB TAI-TECH or equivalent
 CY103, CY104, CY103A, CY104A, CY119, CY120, CY203, CY204, CY205, CY206: DIP Y1 CAP TDK or equivalent
 CY207, CY208: Y1 CAP TDK FOR 5V_{out}, others X2 CAP HJC MKP series 223K0275AB1101 or equivalent
 C103, C108, C109, C204, C205, C206, C207, C210: SMD CAP X7R 1210 or equivalent
 C104, C107, C113: 470uF/100V ALUMINUM CAP SUSCON SDN series or equivalent
 C105, C111, C112, C114, C203, C208, C209: SMD CAP X7R 1812 or equivalent
 CY101, CY102, CY105, CY106, CY105A, CY106A, CY109, CY110: SMD Y2 CAP 2211 or equivalent
 CY113, CY114: SMD Y2 CAP 2211 or equivalent for 48 · 54V_{out}, others SMD Y2 CAP 1808 or equivalent
 CY201, CY202 : BPH853025WR5-101T-NB TAI-TECH or equivalent for 05V_{out}, others SMD Y2 CAP 2211 or equivalent
 D101: STTH30R02DJF-TR ST SECOS or equivalent
 ZD101, ZD201: SMDJ78CA Littlefuse or equivalent
 L101, L102: TMC20-12.5-12-C(P) NANOCRYSTALLINE TECH MOUNT or equivalent
 L201: SYG1HN 181306P BJ-SHOUYE or equivalent
 CN101: TERMINAL BLOCK UL 5.0mm EK500V-08P 300V 20A DINLE or equivalent
 CN201, CN202: P-831N DINKLE or equivalent
 CN203: WAFER DIP AC-DC Nylon UL 94V-0 P110I-04 180° 2.0mm 4PIN KP or equivalent
 MINI JUMPER HMJ20-02O-95BS 2.0mm TKP or equivalent: Uisng in CN203
 NC: No connection




CQB100W8 Series

Application V11 March 2025


Conducted Emission (EN 55032 Class B):

CQB100W8-36S05

Line

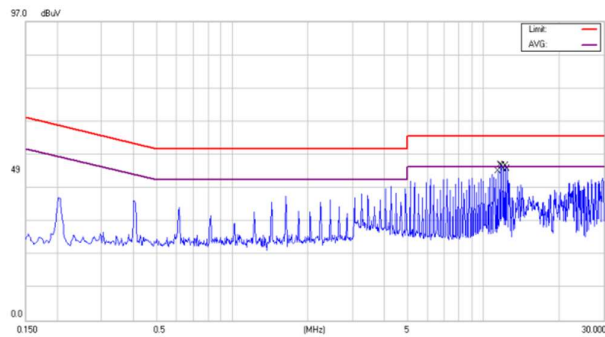


Neutral

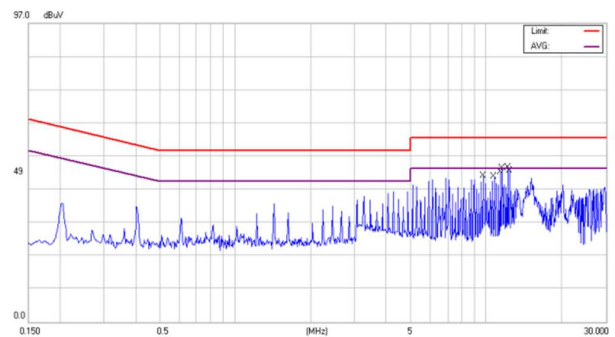


CQB100W8-36S12

Line

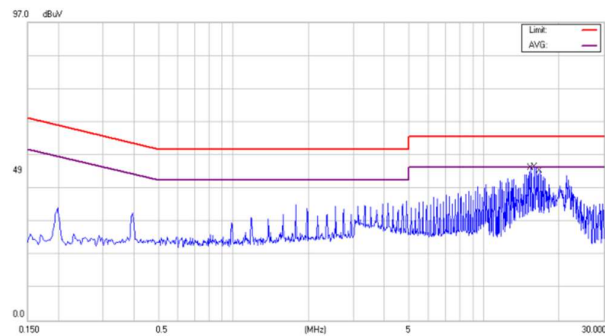


Neutral

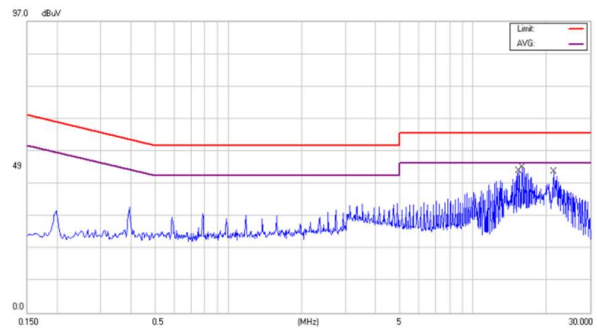


CQB100W8-36S15

Line

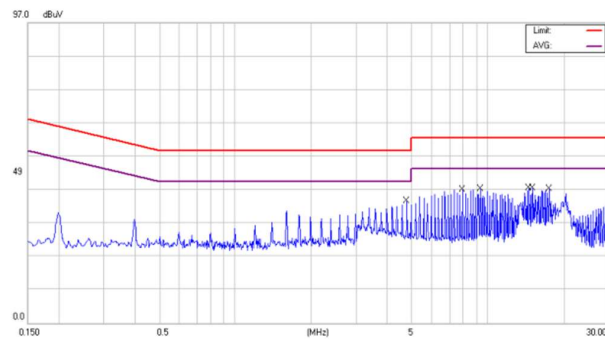

Neutral

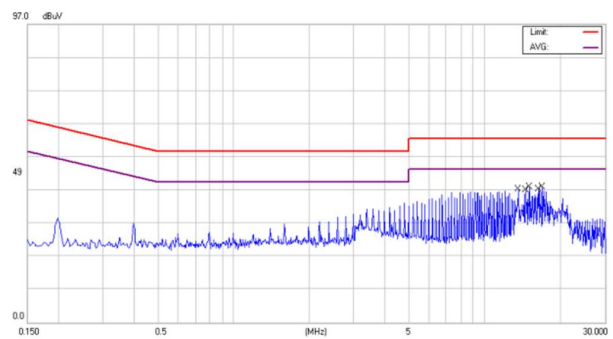




CQB100W8 Series


Application V11 March 2025

CQB100W8-36S24

Line

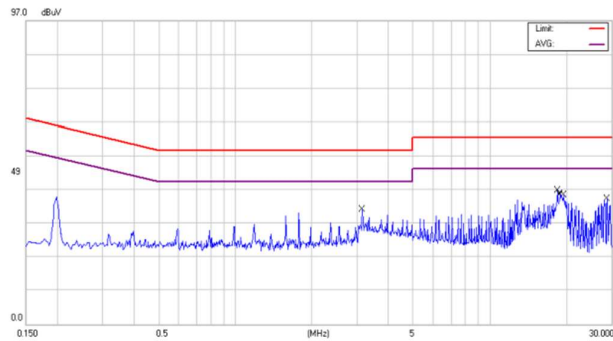


Neutral

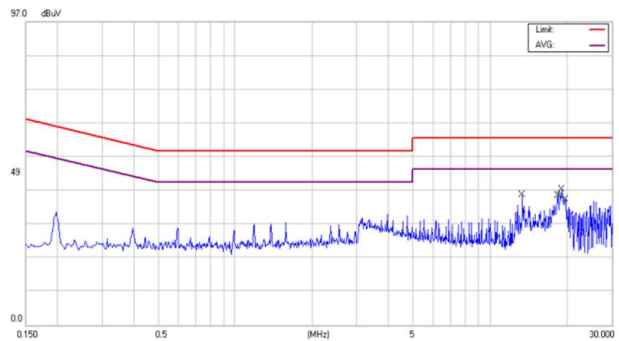


CQB100W8-36S28

Line

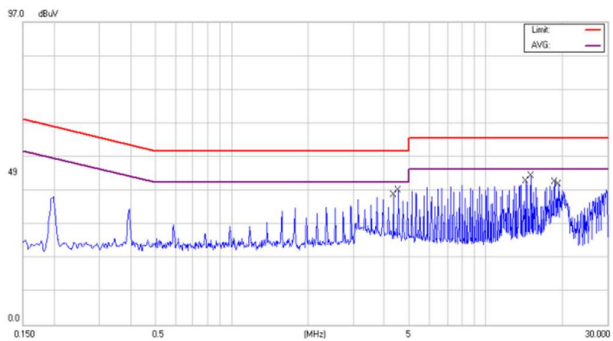


Neutral

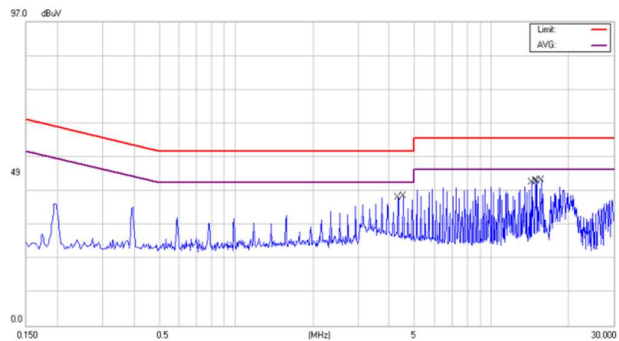


CQB100W8-36S48

Line

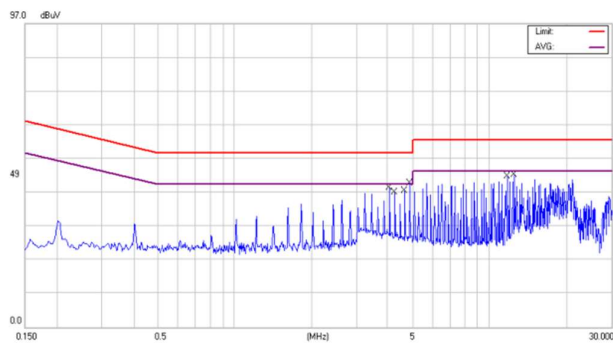

Neutral

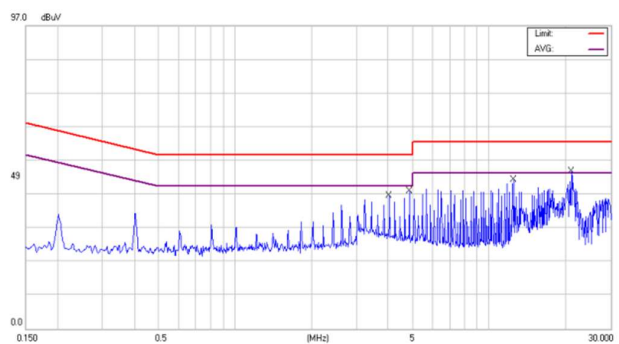




CQB100W8 Series


Application V11 March 2025

CQB100W8-36S54

Line

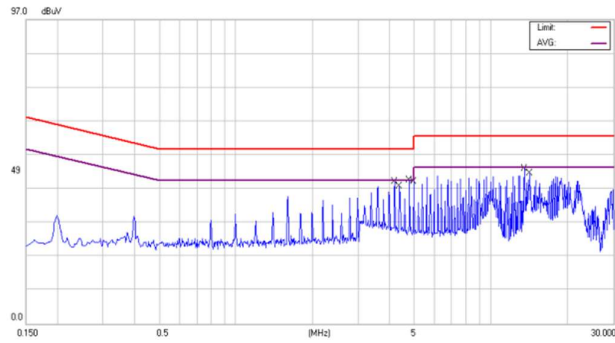


Neutral

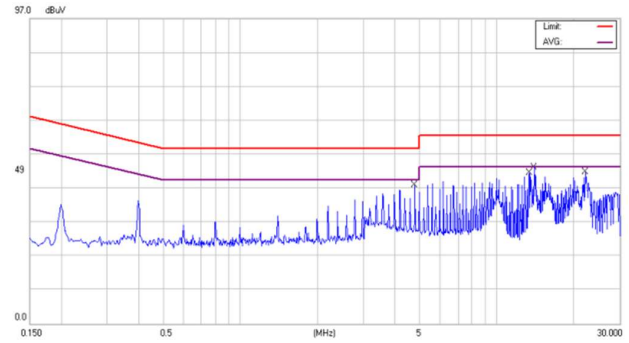


Conducted Emission (EN 50121-3-2:2016 Output Conduction):

CQB100W8-36S05

Positive

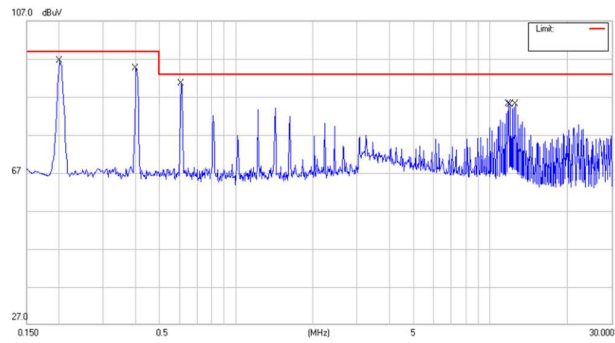


Negative

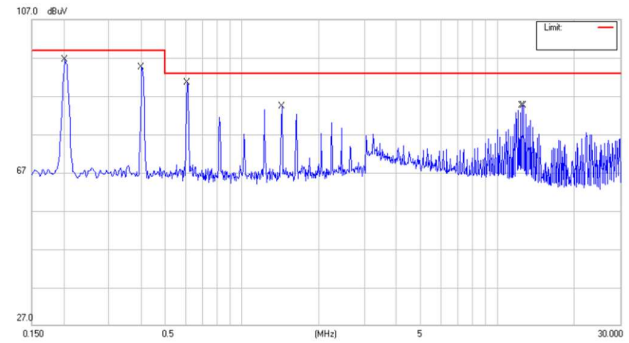


CQB100W8-36S12

Positive

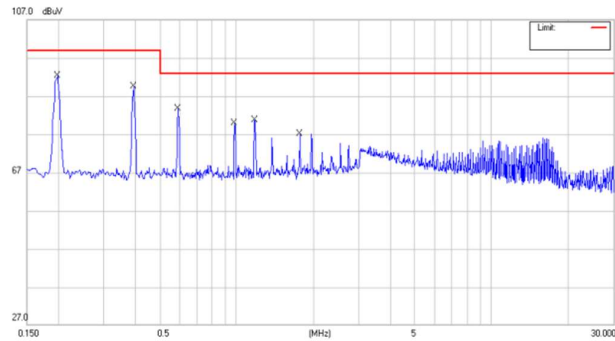

Negative

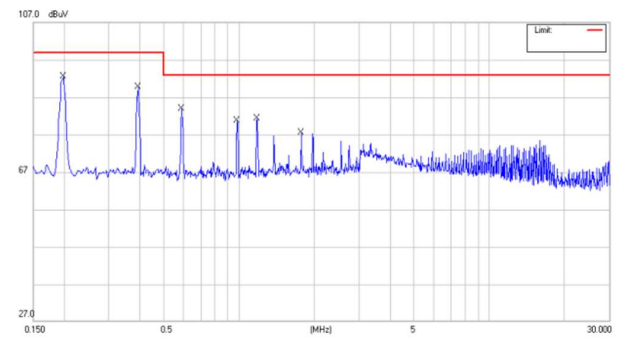




CQB100W8 Series


Application V11 March 2025

CQB100W8-36S15

Positive

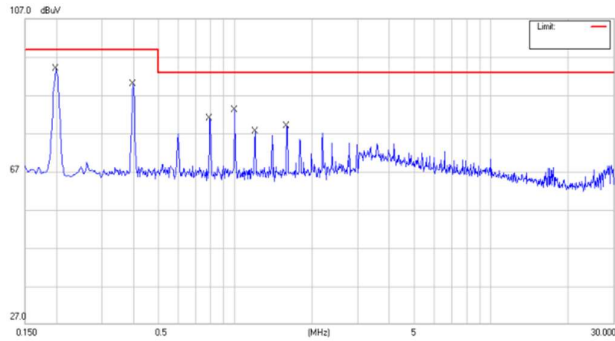


Negative

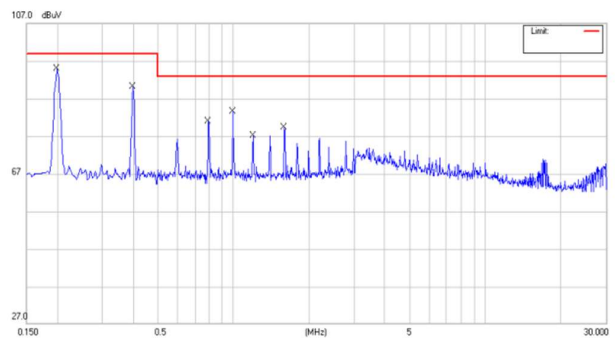


CQB100W8-36S24

Positive

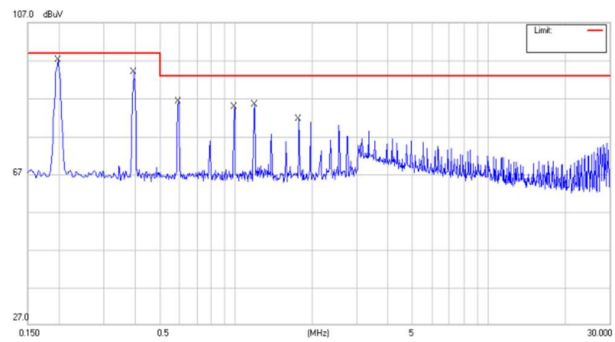


Negative

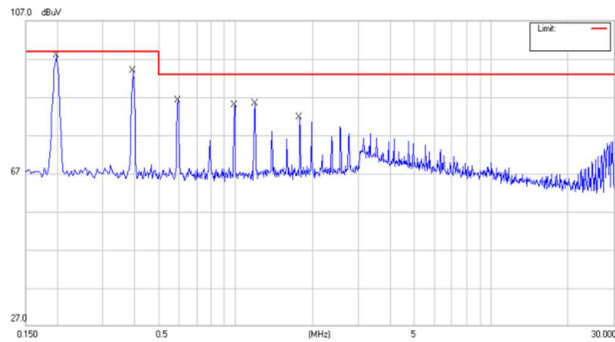


CQB100W8-36S28

Positive

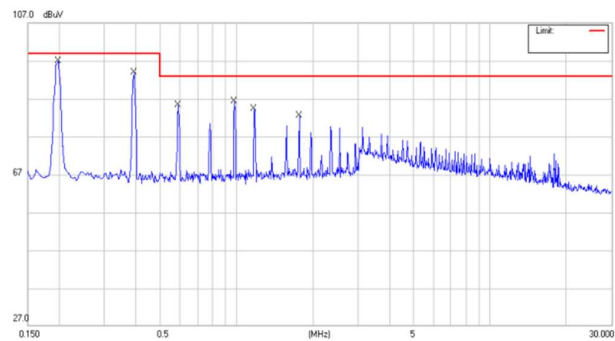

Negative

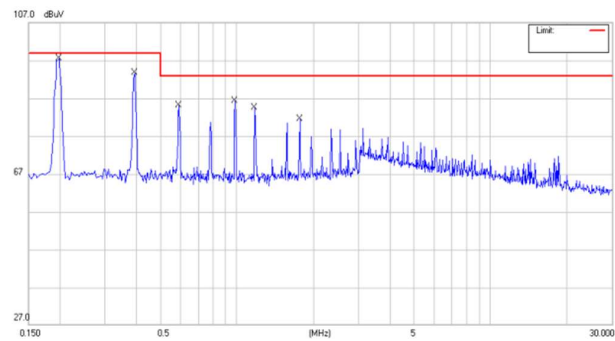




CQB100W8 Series


Application V11 March 2025

CQB100W8-36S48

Positive

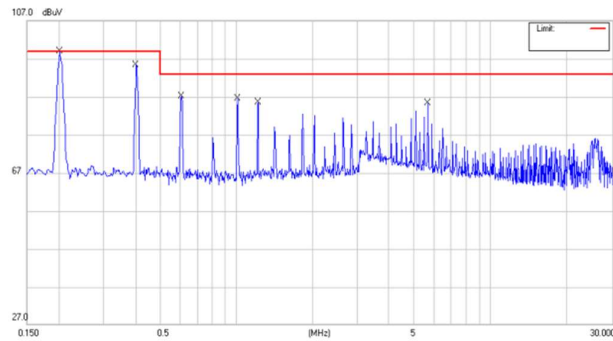


Negative

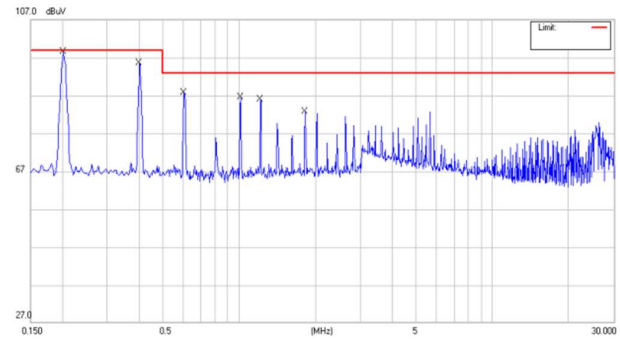


CQB100W8-36S54

Positive

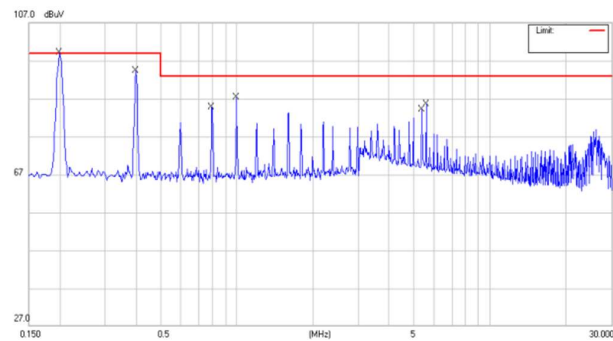

Negative

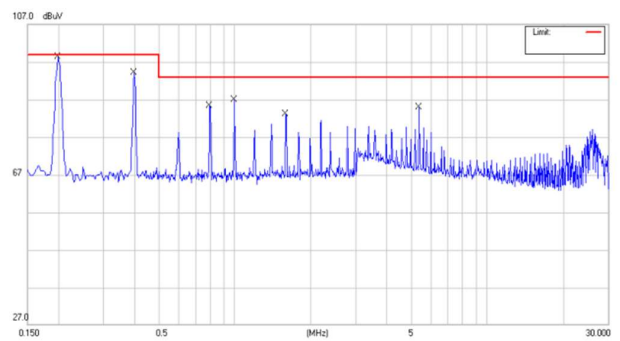


Radiated Emission (EN 55032 Class B):

CQB100W8-36S05

Vertical



Horizontal

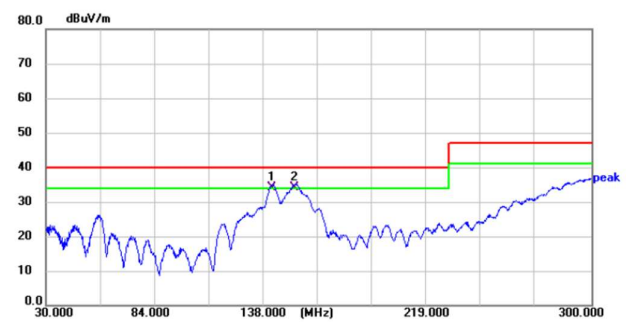




CQB100W8 Series


Application V11 March 2025

CQB100W8-36S12

Vertical

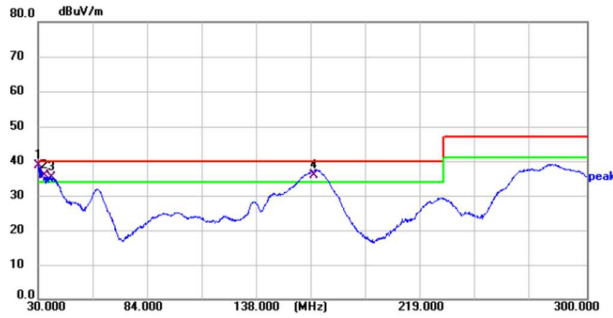


Horizontal

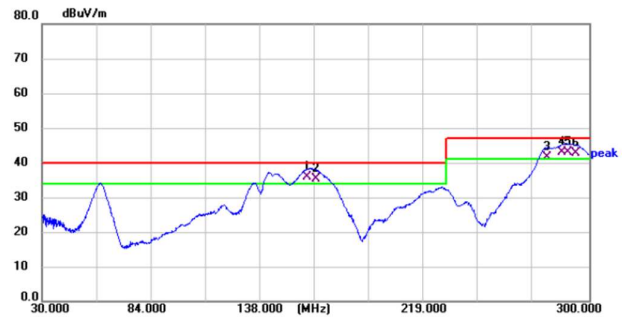


CQB100W8-36S15

Vertical

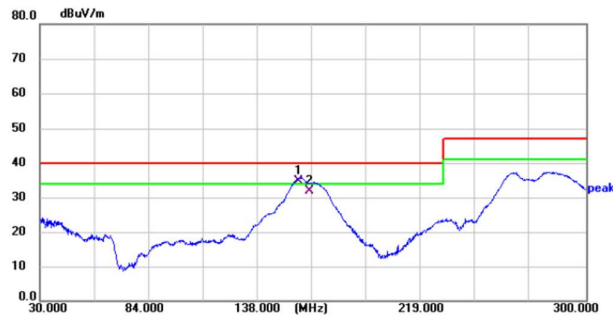


Horizontal

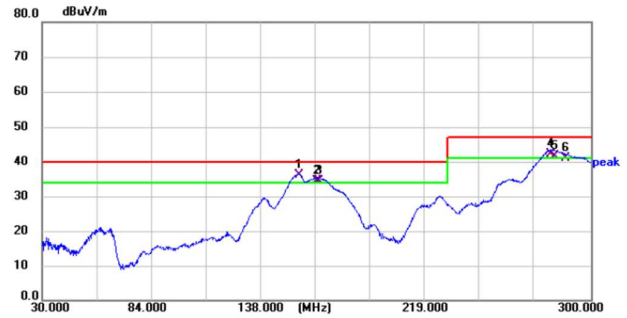

CQB100W8-36S24

Vertical

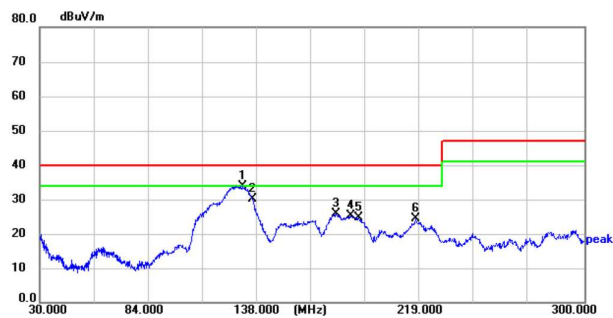

Horizontal






CQB100W8 Series


Application V11 March 2025

CQB100W8-36S28

Vertical

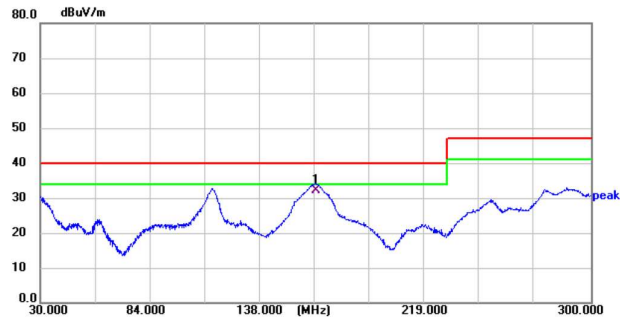


Horizontal

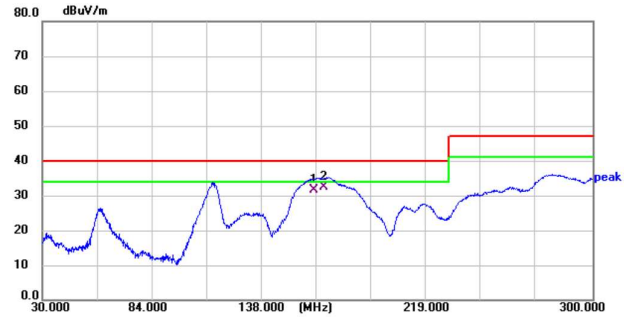


CQB100W8-36S48

Vertical

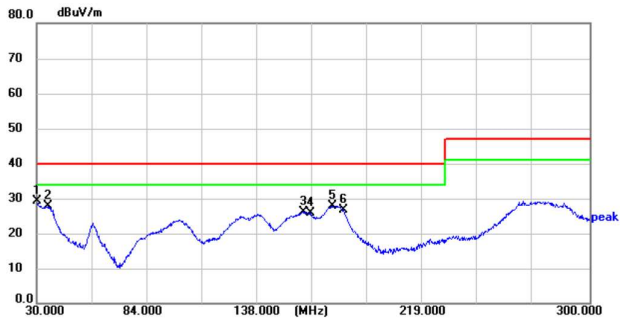


Horizontal

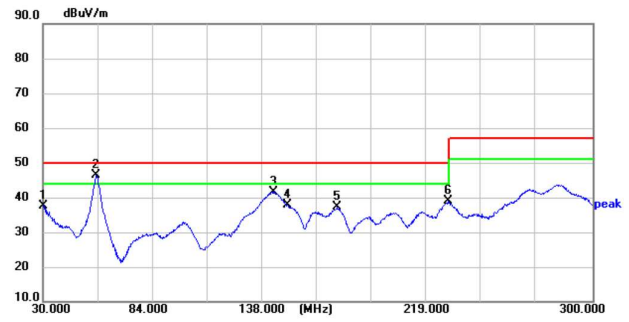

CQB100W8-36S54

Vertical

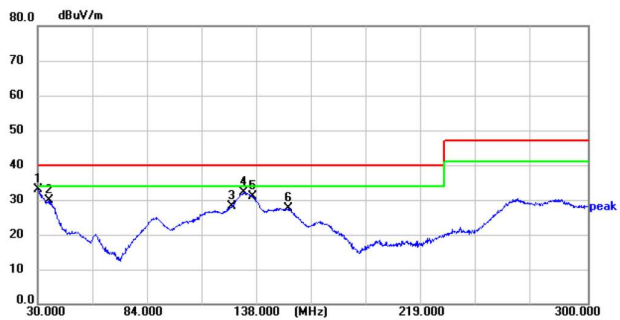


Horizontal





CQB100W8 Series Application V11 March 2025

10.3 Suggested Configuration for RIA12 Surge Test

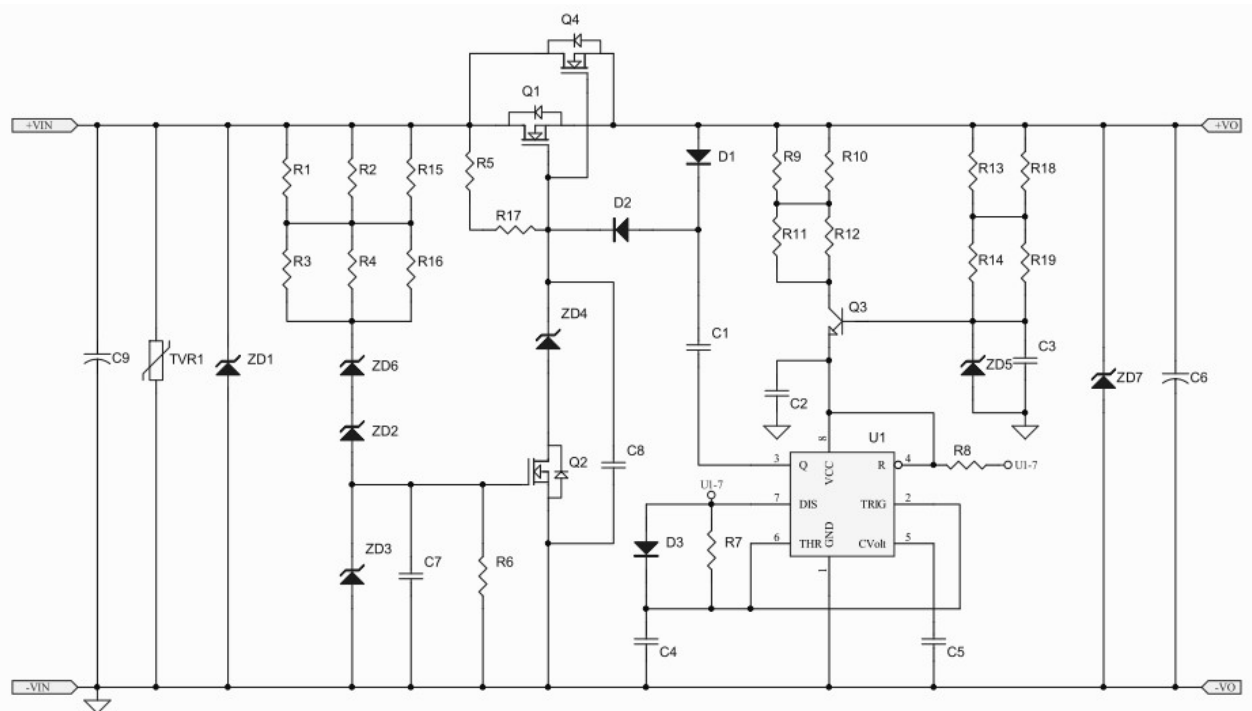

CINCON ELECTRONICS CO., LTD.

Headquarters:

14F, No.306, Sec.4, Hsin Yi Rd.
Taipei, Taiwan
Tel: 886-2-27086210
Fax: 886-2-27029852
E-mail: sales@cincon.com.tw
Web Site: <https://www.cincon.com>

Factory:

No. 8-1, Fu Kung Rd.
Fu Hsing Industrial Park
Fu Hsing Hsiang,
ChangHua Hsien, Taiwan
Tel: 886-4-7690261
Fax: 886-4-7698031

Cincon North America:

1655Mesa Verde Ave. Ste 180
Ventura, CA93003
Tel: 805-639-3350
Fax: 805-639-4101
E-mail: info@cincon.com