

## General Purpose 16-Bit I<sup>2</sup>C-Bus IO Expander

The PI4IOE5V6416 is a 16-bit general purpose IO expander that provides remote IO expansion for most microcontroller families via the I<sup>2</sup>C-bus interface.

It provides a simple solution when additional IOs are needed while keeping interconnections to a minimum. For example, in battery-powered mobile applications for interfacing to sensors, push buttons, keypad, etc.,.

It operates from 1.65V to 5.5V on the GPIO-port side and 1.65V to 5.5V on the SDA/SCL side (I<sup>2</sup>C-bus interface). This allows the PI4IOE5V6416 to interface with next-generation microprocessors and microcontrollers on the SDA/SCL side, where supply levels are reducing to conserve power.

The PI4IOE5V6416 is available in the industry standard TSSOP-24 and TQFN-24 packages.



### The Diodes Advantage

**■ Low Operation power supply voltage from 1.65V to 5.5V**

Supports new generation of low power supply microprocessors and microcontrollers.

**■ Bidirectional voltage level translation and GPIO expansion**

Simplified interconnection between processor running at one voltage level to IO devices operating at a different (usually higher) voltage level.

**■ Wise I/O Programming features:**


- Programmable output drive strength
- Latchable inputs
  - Programmable pull-up/pull-down resistors
- Maskable interrupt
  - Programmable open-drain or push-pull outputs

**■ Fully Compatible with I<sup>2</sup>C Standard Mode and I<sup>2</sup>C Fast Mode (Up to 400kbit/s Operation)**

### Applications

- Server
- Networking
- Telecom
- Mobile Applications

## Typical Application Circuit

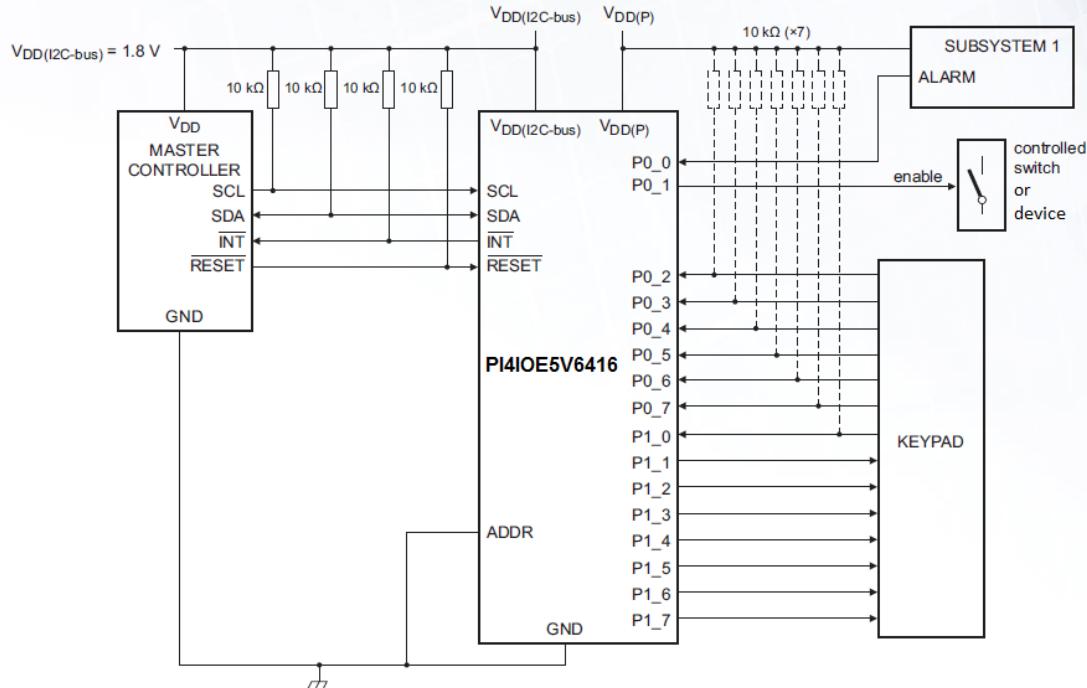

## Ordering Information

Part Numbers	Package Code	Package	Reel Size	# per Reel
PI4IOE5V6416LEX	L	TSSOP-24	13"	3,000
PI4IOE5V6416ZDEX	ZD	TQFN-24	13"	3,500

For more information: <https://www.diodes.com/part/PI4IOE5V6416>

## Cross Reference

Competitors	Part#	Package	Diodes Ordering Part#
NXP	PCAL6416A	PW	PI4IOE5V6416LEX
		HF	PI4IOE5V6416ZDEX
NXP	PCA6416A	PW	PI4IOE5V6416LEX
		HF	PI4IOE5V6416ZDEX
TI	TCA6416	PW	PI4IOE5V6416LEX
		RTW	PI4IOE5V6416ZDEX