

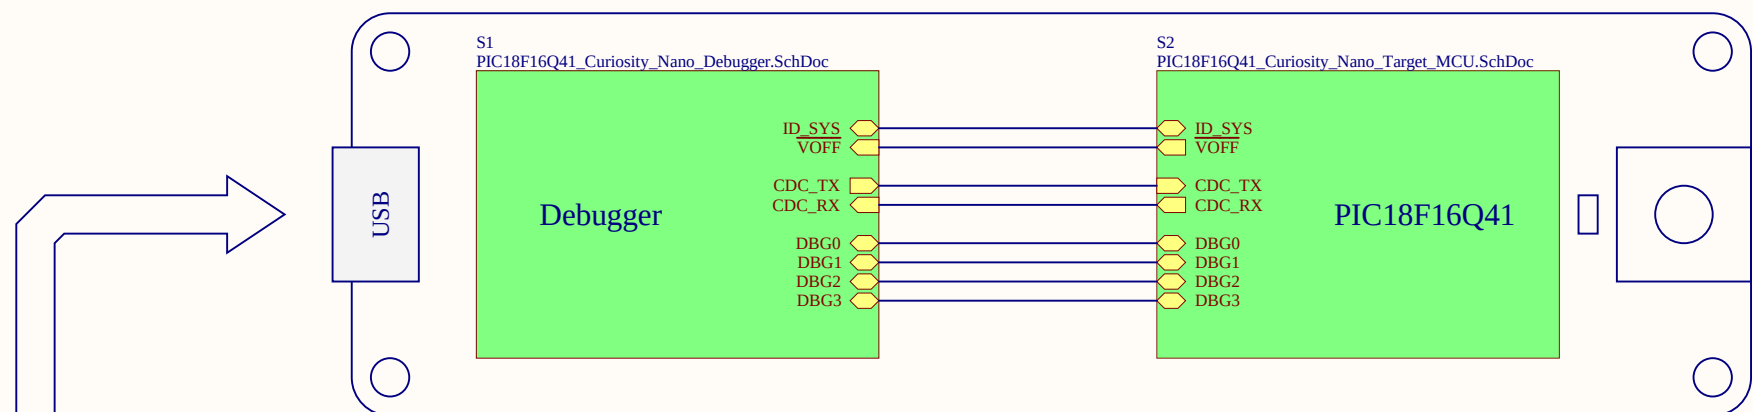


PIC18F16Q41 Curiosity Nano

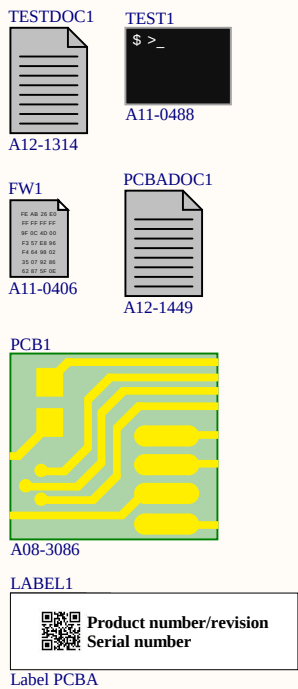


On-Board Peripherals

LED0	RC1	Active Low
SW0	RC0	Active Low

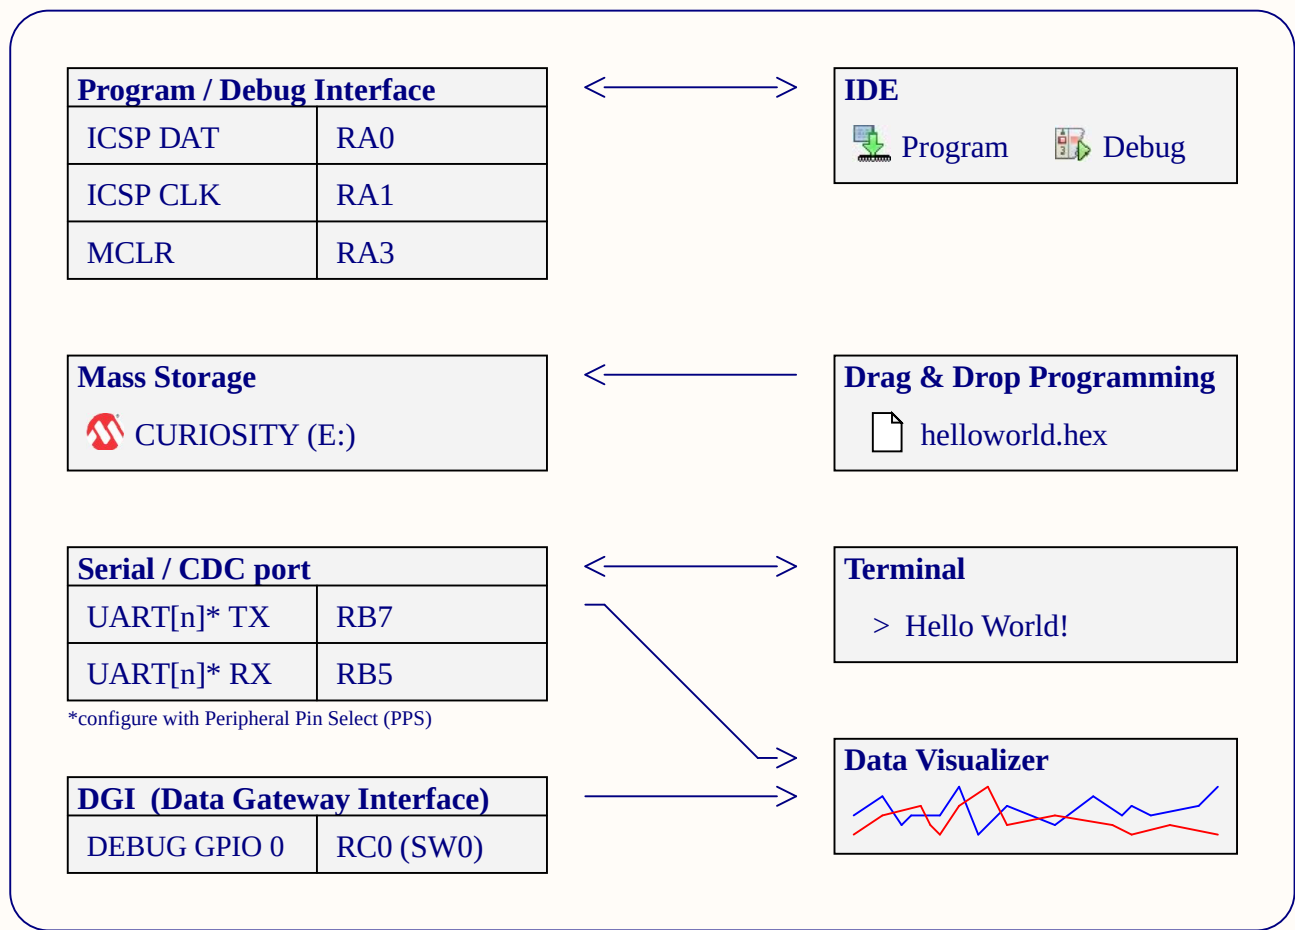


Drawn By: ML		 MICROCHIP		Designed with Altium Altium.com
Engineer: PB				
Project Title PIC18F16Q41 Curiosity Nano				
Sheet Title Top Level				
Size A3	PCB Assembly Number: A09-3378		PCBA Revision: 2	Date: 17.08.2020
	PCB Number: A08-3086		PCB Revision: 2	
File: PIC18F16Q41_Curiosity_Nano_TopLevel.SchDoc				Page: 1 of 4

PIC18F16Q41


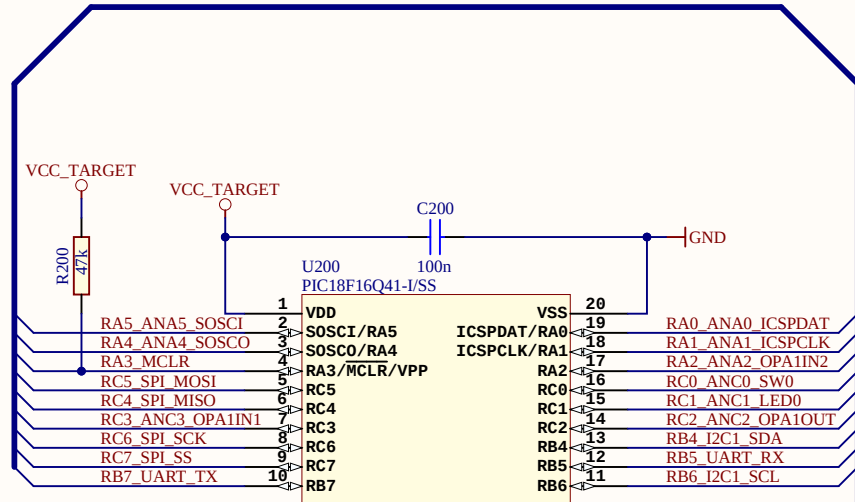


Debugger	Name	Pin
CDC TX	UART[n] RX	RB5
CDC RX	UART[n] TX	RB7
DBG0	ICSPDAT	RA0
DBG1	ICSPCLK	RA1
DBG2	GPIO0	RC0
DBG3	MCLR	RA3
VTG	1.8V - 5.5V	

DEBUGGER CONNECTIONS

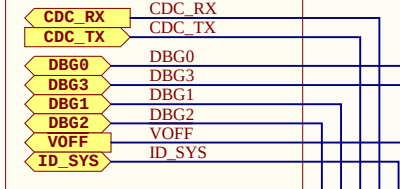

PROG/DEBUG Pull

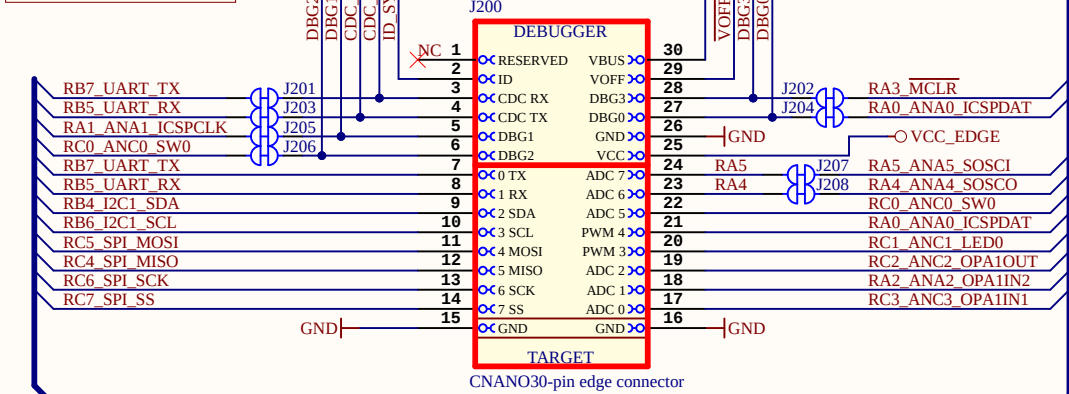

NOTE on UART/CDC:


RX/TX on the header denotes the input/output direction of the signal respective to it's source.

CDC TX is output from the DEBUGGER.
CDC RX is input to the DEBUGGER.
TX is output from the TARGET device.
RX is input to the TARGET device.


NOTE on I2C:

No pull-ups on board. Pull-ups should be mounted close to slave device(s).


USER BUTTON

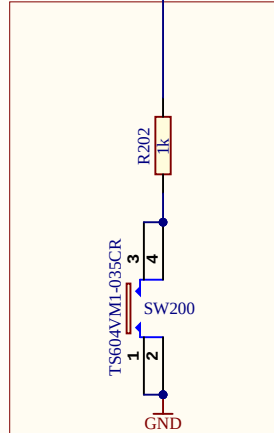

USER LED

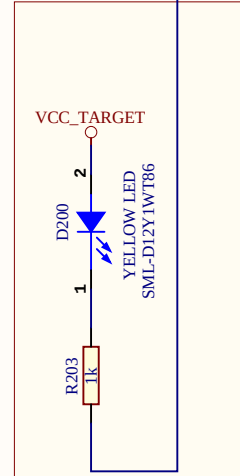

32KHz Crystal

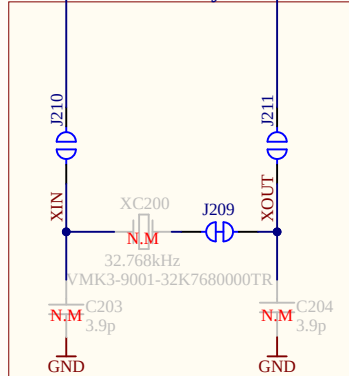


Crystal datasheet:
Crystal = 7pF
max ESR = 70kOhm
Accuracy ±20ppm

Estimated parameters:
Cxin = 5pF (estimate)
Cxout = 5pf (estimate)
Cpcb = 2.5pF

Estimated load
C = 2 (Ccrystal- Cpara - Cpcb)
C = 2 (7pF - 2.5pF - 2.5pF)
C = 4pF

Selected in design
C = 3.9pF

TARGET BULK



Drawn By:

ML

Engineer:

PB

Project Title

PIC18F16Q41 Curiosity Nano

Sheet Title

Target MCU

Size A3

PCB Assembly Number: A09-3378

PCBA Revision: 2

PCB Number:

A08-3086

PCB Revision: 2

File: PIC18F16Q41_Curiosity_Nano_Target_MCU.SchDoc

Designed with


Altium

Altium.com

Date: 17.08.2020

Page: 2 of 4

TARGET ADJUSTABLE REGULATOR

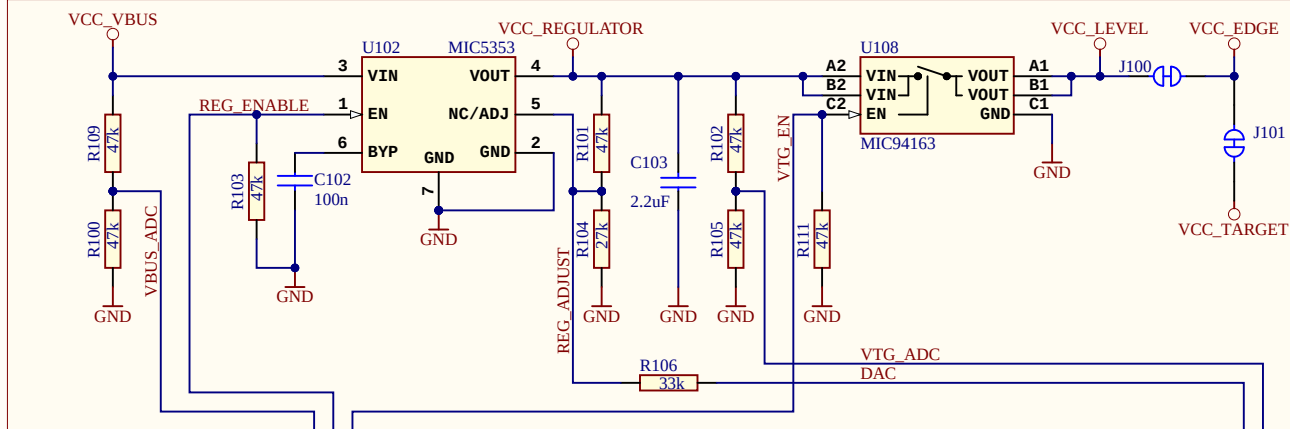

Adjustable output and limitations:

- The DEBUGGER can adjust the output voltage of the regulator between 1.25V and 5.1V to the target.
- The voltage output is limited by the input (USB), which can vary between 4.40V to 5.25V
- The level shifters have a minimal voltage level of 1.65V and will limit the minimum operating voltage allowed for the target to still allow communication.
- The MIC94163 has a minimal voltage level of 1.70V and will limit the minimum voltage delivered to the target.
- Firmware configuration will limit the voltage range to be within the target specification.

J100:
Cut-strap used for full separation of target power from the level shifters and on-board regulators.
- For current measurements using an external power supply, this strap could be cut for more accurate measurements. Leakage back through the switch is in the micro ampere range.

J101:
This is footprint for a 1x2 100mil pitch pin-header that can be used for easy current measurement to the target microcontroller and the LED / Button. To use the footprint:
- Cut the track between the holes, and mount a pin-header


MIC5353:
Vin: 2.6V to 6V
Vout: 1.25V to 5.1V
Imax: 500mA
Dropout (typical): 50mV@150mA, 160mV @ 500mA
Accuracy: 2% initial
Thermal shutdown and current limit

Maximum output voltage is limited by the input voltage and the dropout voltage in the regulator.
(Vmax = Vin - dropout)

Interface	ICSP TARGET	UPDI TARGET	SWD TARGET
CDC TX	UART RX	UART RX	UART RX
CDC RX	UART TX	UART TX	UART TX
DBG0	DAT	UPDI	SWDAT
DBG1	CLK	GPIO	SWCLK
DBG2	GPIO	GPIO	SWO/GPIO
DBG3	MCLR	RESET	RESET
VCC	-	-	-


MIC5528:
Vin: 2.5V to 5.5V
Vout: Fixed 3.3V
Imax: 500mA
Dropout: 260mV @ 500mA

DEBUGGER TESTPOINT

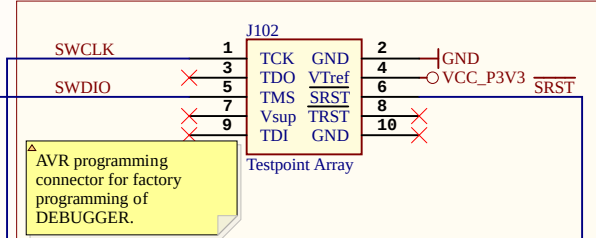


AVR programming connector for factory programming of DEBUGGER.


DEBUGGER REGULATOR

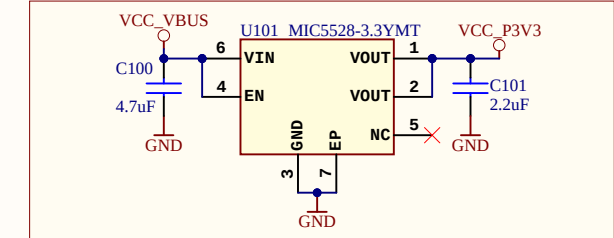


DEBUGGER POWER/STATUS LED




DEBUGGER USB MICRO-B CONNECTOR

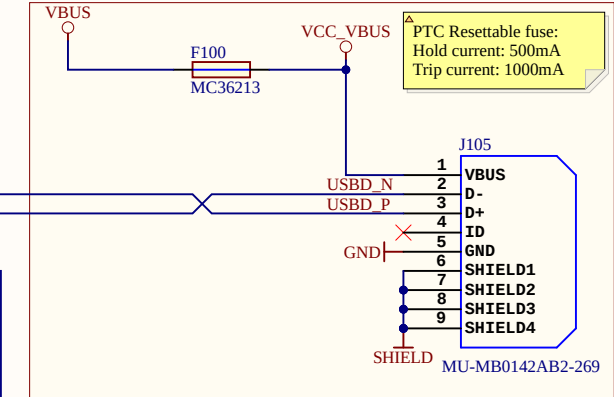


ID PIN

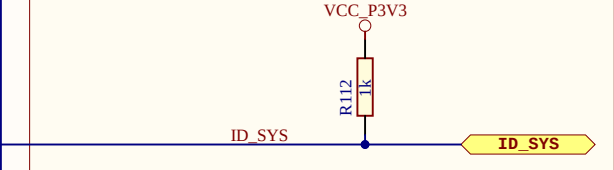

DEBUGGER

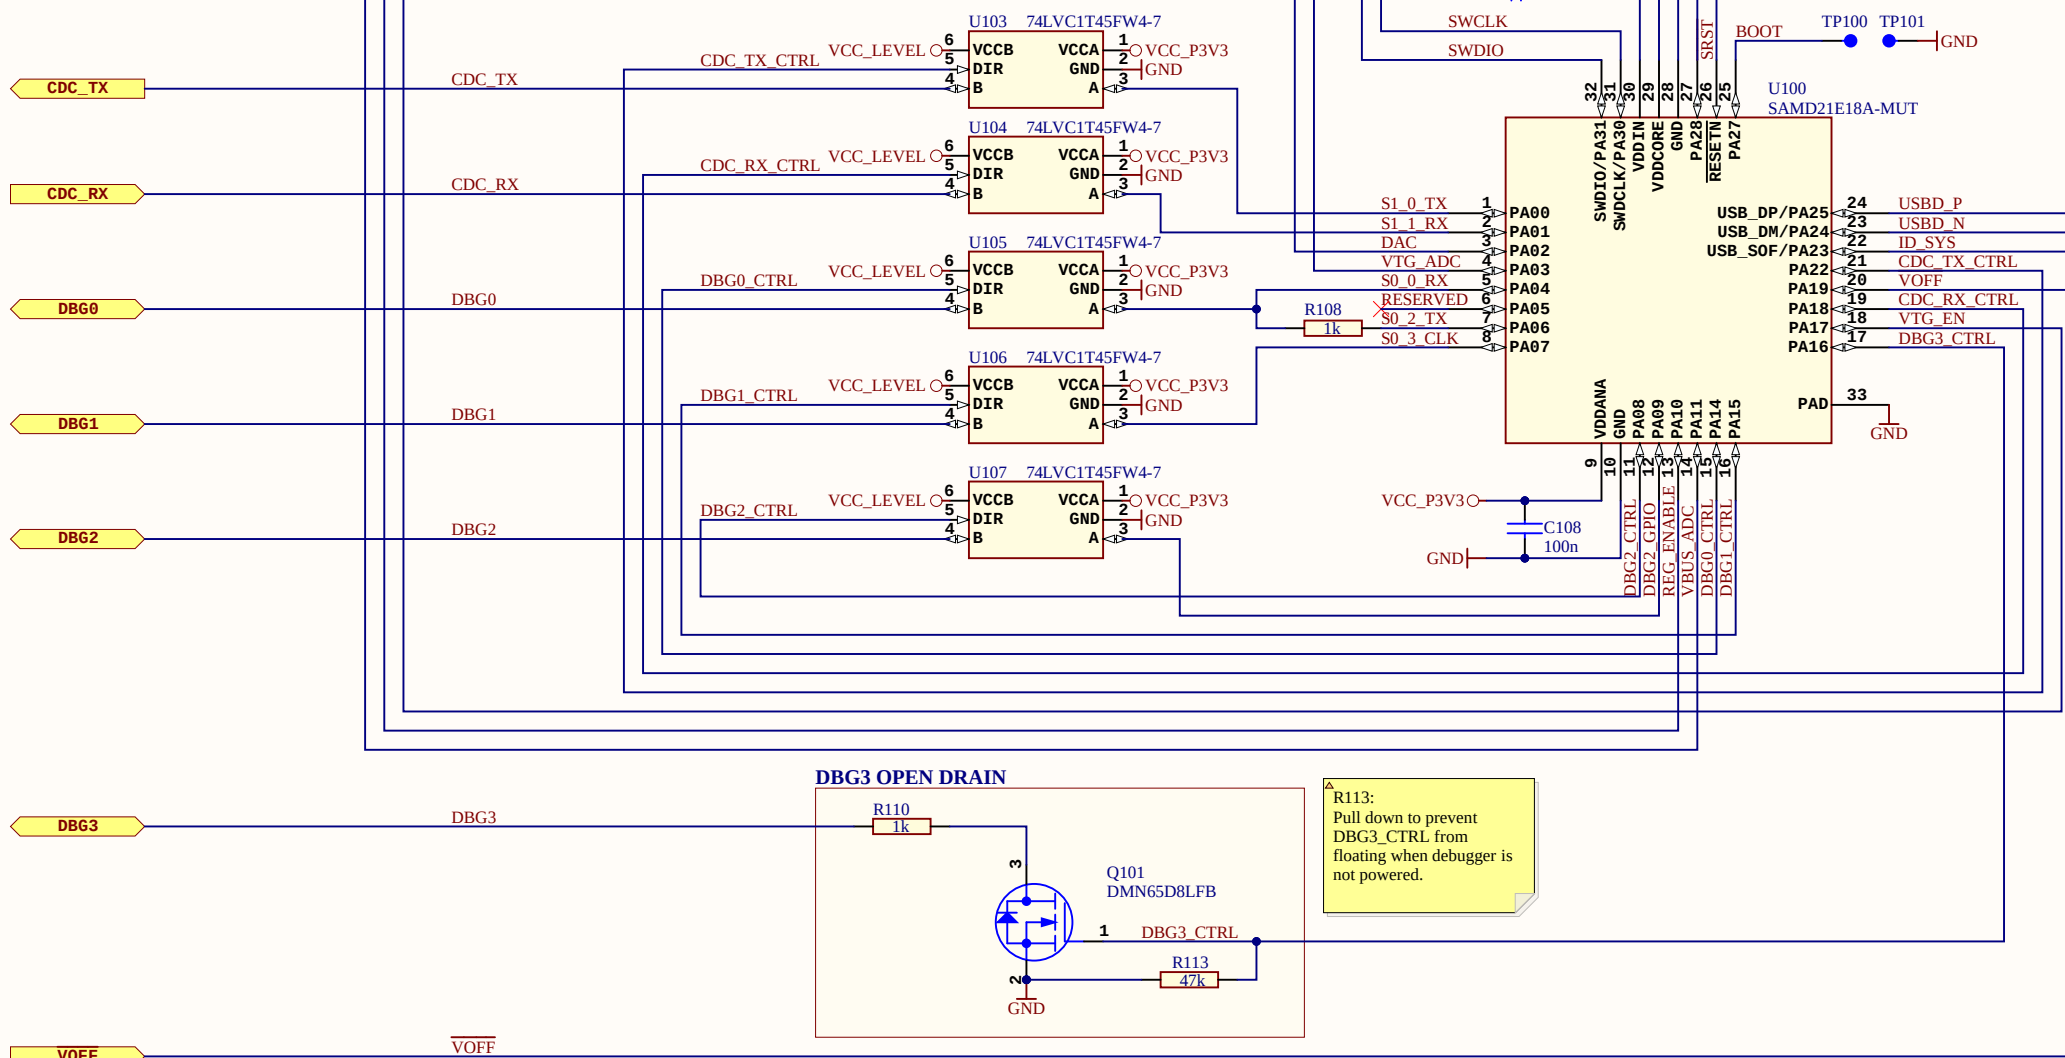

DBG3 OPEN DRAIN

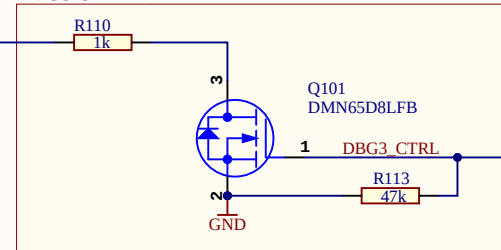

R113:
Pull down to prevent DBG3_CTRL from floating when debugger is not powered.

Revision History

PCB Assembly Rev 1:

▲

Design Changes:
Initial Design


PCB:
PCB revision 1

PCB Assembly Rev 2:


▲

Design Changes:
Changed to SSOP20 package


PCB:
PCB revision 2

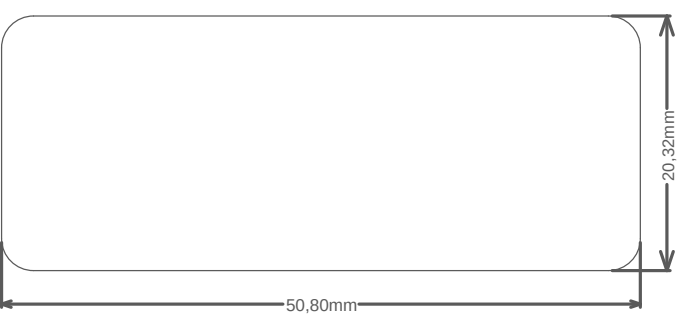


Connector Placement

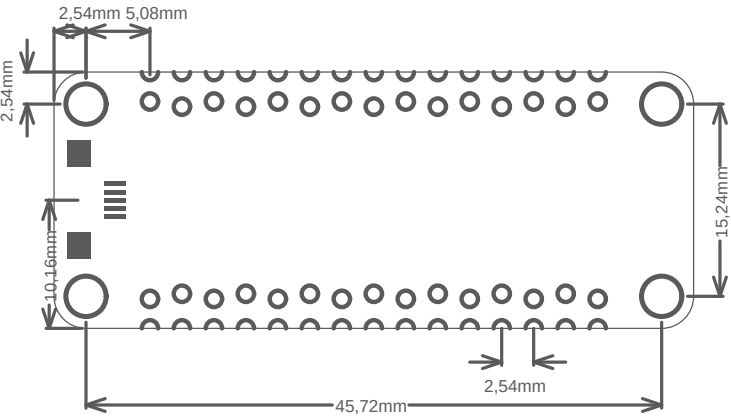

Test Point Placement

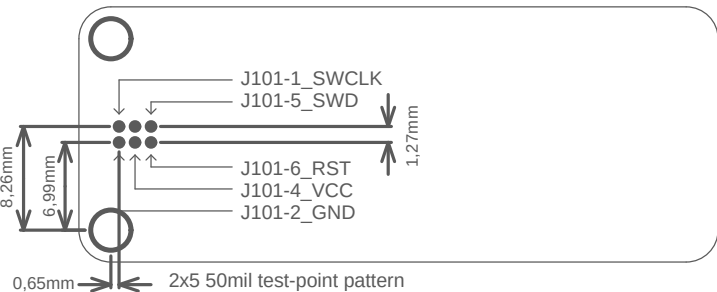

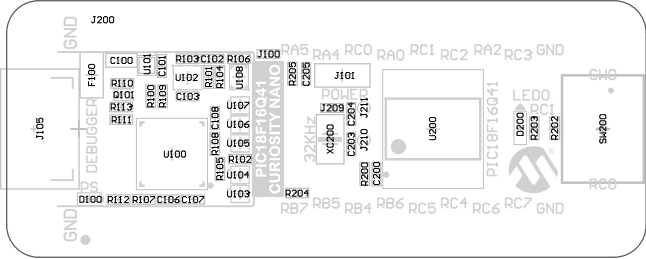

Microchip © 2020

LABEL1

A08-3086 Rev2

CONNECTIONS

TARGET


RA3	J202	D3
RC0	J206	D2
RA1	J205	D1
RA0	J204	D0
RB7	J201	RX
RB5	J203	TX

DEBUGGER

Ct

TP101 GND
TP100 BOOT

J102

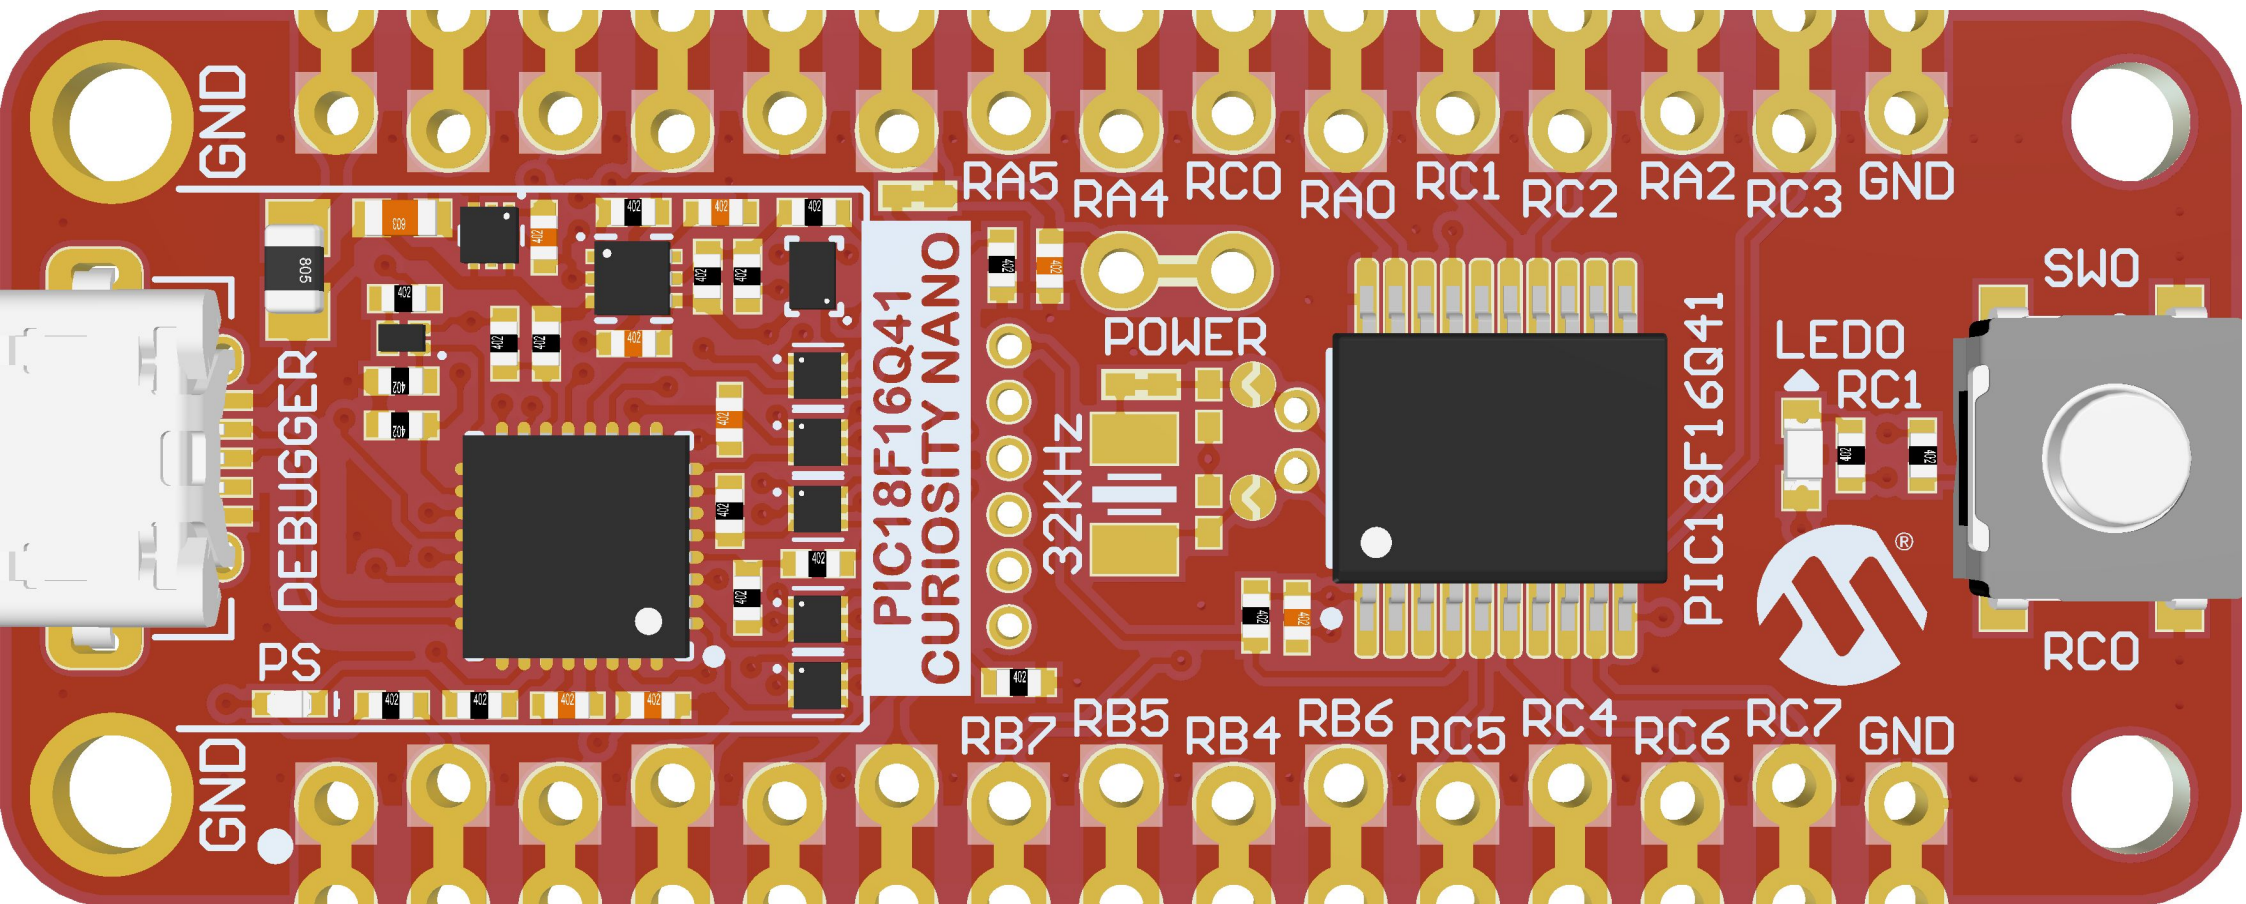

GND

PS DEBUGGER

GND

PIC18F16Q41
CURIOSITY NANO

RA5

RA4

RC0

RA0

RC1

RC2

RA2

RC3

GND

32KHz

POWER

PIC18F16Q41

LED0
RC1

SW0

RC0

RB7

RB5

RB4

RB6

RC5

RC4

RC6

RC7

GND

Microchip © 2020

A08-3086 Rev2

GND RC3 RA2 RC2 RC1 RA0 RC0 RA4 RA5 V_{TT} GND D0 D3 V_{OFF} V_{BUS}

RA4
RA5

TARGET

RA3	D3
RC0	D2
RA1	D1
RA0	D0
RB7	RX
RB5	TX

DEBUGGER


CDC


GND
BOOT


GND RC7 RC6 RC4 RC5 RB6 RB4 RB5 RB7 D2 D1 TX RX ID NC


GND

GND

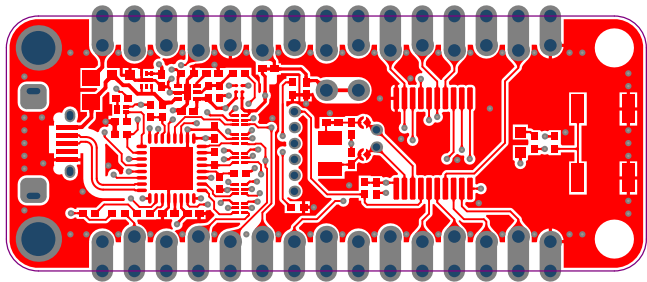

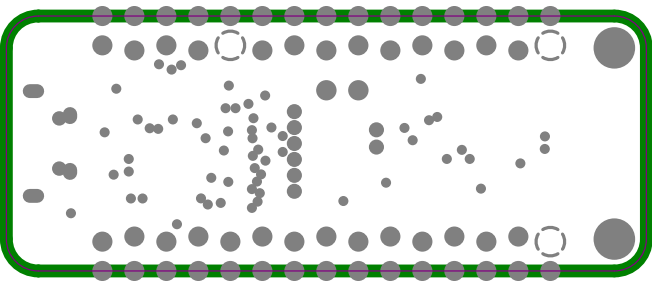

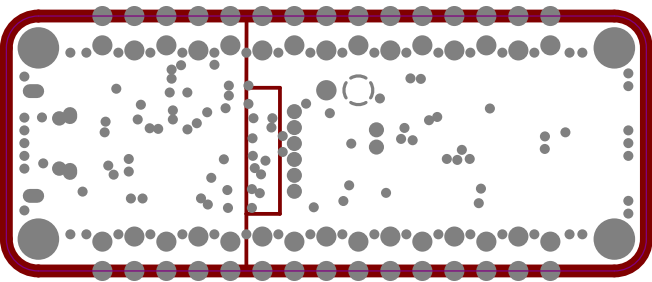

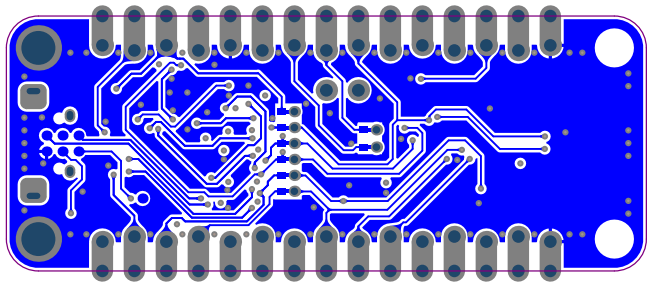

Component list

Bill of Materials Fitted for Variant [Default Assembly] of Project [PIC18F16Q41_Curiosity_Nano.PrjPcb] (No PCB Document Selected)

Source Data From: PIC18F16Q41_Curiosity_Nano.PrjPcb

Project: PIC18F16Q41_Curiosity_Nano.PrjPcb

Variant: Default Assembly



Report Date: 17.08.2020 16:22
Print Date: 17.08.2020 16:09:13

Fitted	Designator	Quantity	Value	Manufacturer	MPN	Description
Fitted	C100	1	4.7uF	WALSIN Technology Corporation	0603X475K100CT	Ceramic capacitor, SMD 0603, X5R, 10V, 10% (de31036)
Fitted	C101	1	2.2uF	Kemet	C0402C225M9PAC	Ceramic capacitor, SMD 0402, X5R, 6.3V, +/-20%
Fitted	C102, C107, C108, C200	4	100n	Kemet	C0402C104K4RACTU	Ceramic capacitor, SMD 0402, X7R, 16V, +/-10%
Fitted	C103, C205	2	2.2uF	TDK	C1005X5R1A225K	CAP CER 2.2UF 10V 10% X5R 0402
Fitted	C106	1	1u	Kemet	C0402C105K9PAC	Ceramic capacitor, SMD 0402, X5R, 6.3V, +/-10% (de26942)
Fitted	D100	1	GREEN LED	ROHM	SML-P12MTT86R	LED, SMD 0402, Green, Wave length=569nm, 2.1mcd @ (1mA, 1.9Vf)rohm
Fitted	D200	1	YELLOW LED	ROHM	SML-D12Y1WT86	LED, SMD 0603, Yellow, Wave length=590nm, 100mcd @ (20mA, 2.2Vf) rohm
Fitted	F100	1	MC36213	Multicomp	MC36213	Resetable PTC fuse, Ih = 0.5A, It = 1.0A, 0805 package
Fitted	FW1	1	nEDBG firmw are			nEDBG firmw are
Fitted	J105	1	MU-MB0142AB2-269	Allen Creations Corp.	MU-MB0142AB2-269	USB micro AB, Surface mount signals and DIP shield
Fitted	LABEL1	1	Label PCBA	ACT Logimark AS	505462	PCBA identification label PP Top White Gloss
Fitted	PCB1	1	PIC18F16Q41 Curiosity Nano PCB Documentation			PIC18F16Q41 Curiosity Nano PCB Documentation
Fitted	PCBADOCL	1	PIC18F16Q41 Curiosity Nano PCBA Documentation			PIC18F16Q41 Curiosity Nano PCBA Documentation
Fitted	Q101	1	DMN65D8LFB	Diodes Incorporated	DMN65D8LFB-7	N-channel MOSFET, DFN1006-3 (SOT883), 60V, 330mA, 4Ohm
Fitted	R100, R101, R102, R103, R105, R109, R111, R113, R200, R204, R205	11	47k	KOA	RK73H1ETTP4702F	Thick film resistor, SMD 0402, 1/16W, 1%
Fitted	R104	1	27k	Yageo	RC0402FR-0727KL	Thick film resistor, SMD 0402, 1/16W, 1%
Fitted	R106	1	33k	ASJ Holdings	CR10-3302-FK	Thick film resistor, SMD 0402, 1/16W, 1%
Fitted	R107, R108, R110, R112, R202, R203	6	1k	ASJ Holdings	CR10-1001-FK	Thick film resistor, SMD 0402, 1/16W, 1%
Fitted	SW200	1	TS604VM1-035CR	Dailyw ell Electronics Co.LTD	TS604VM1-035CR-R	SWITCH, SMD, 260gf, 6.4mm X 6.2mm
Fitted	TEST1	1	PIC18F16Q41 Curiosity Nano Test			Fixture Test for PIC18F16Q41 Curiosity Nano
Fitted	TESTDOC1	1	Curiosity Nano Test Instructions			Generic Test Instructions for Curiosity Nano
Fitted	U100	1	SAMD21E18A-MUT	Microchip	ATSAMD21E18A-MUT	32-bit RISC MCU 32pin
Fitted	U101	1	MIC5528-3.3YMT	Microchip	MIC5528-3.3YMT-T5	LDO 3.3V 0.5A 6TDFN
Fitted	U102	1	MIC5353	Microchip	MIC5353YMT-TR	500mA Ultra Low Dropout LDO regulator, 2% accuracy, 1.6x1.6mm MLF
Fitted	U103, U104, U105, U106, U107	5	74LVC1T45PW4-7	Diodes Incorporated	74LVC1T45PW4-7	Single-Bit Dual-Supply Transceiver, 1.65-5.5 Translation and 3-State Outputs
Fitted	U108	1	MIC94163	Microchip	MIC94163YCS-TR	Loadswitch, Rds(on) = 14.5mohm, 1.0mm x 1.5mm WLCSP, reverse blocking
Fitted	U200	1	PIC18F16Q41-I/SS	Microchip	PIC18F16Q41T-I/SS	MCU 64MHz PIC18F16Q41-I/SS SSOP20
Not Fitted	C203, C204	0	3.9p	Yageo	CC0402CRNP09B3R9	Ceramic capacitor, SMD 0402, NP0, 50V, +/-0.25pF
Not Fitted	XC200	0	32.768kHz	Microchip	VMK3-9001-32K7680000TR	Crystal, 32.768kHz, CL=9.0pF, ESR=70kOhm, SMD LxW=3.2 x 1.5mm, 20ppm
		50				
Approved			Notes			