




PDA-series

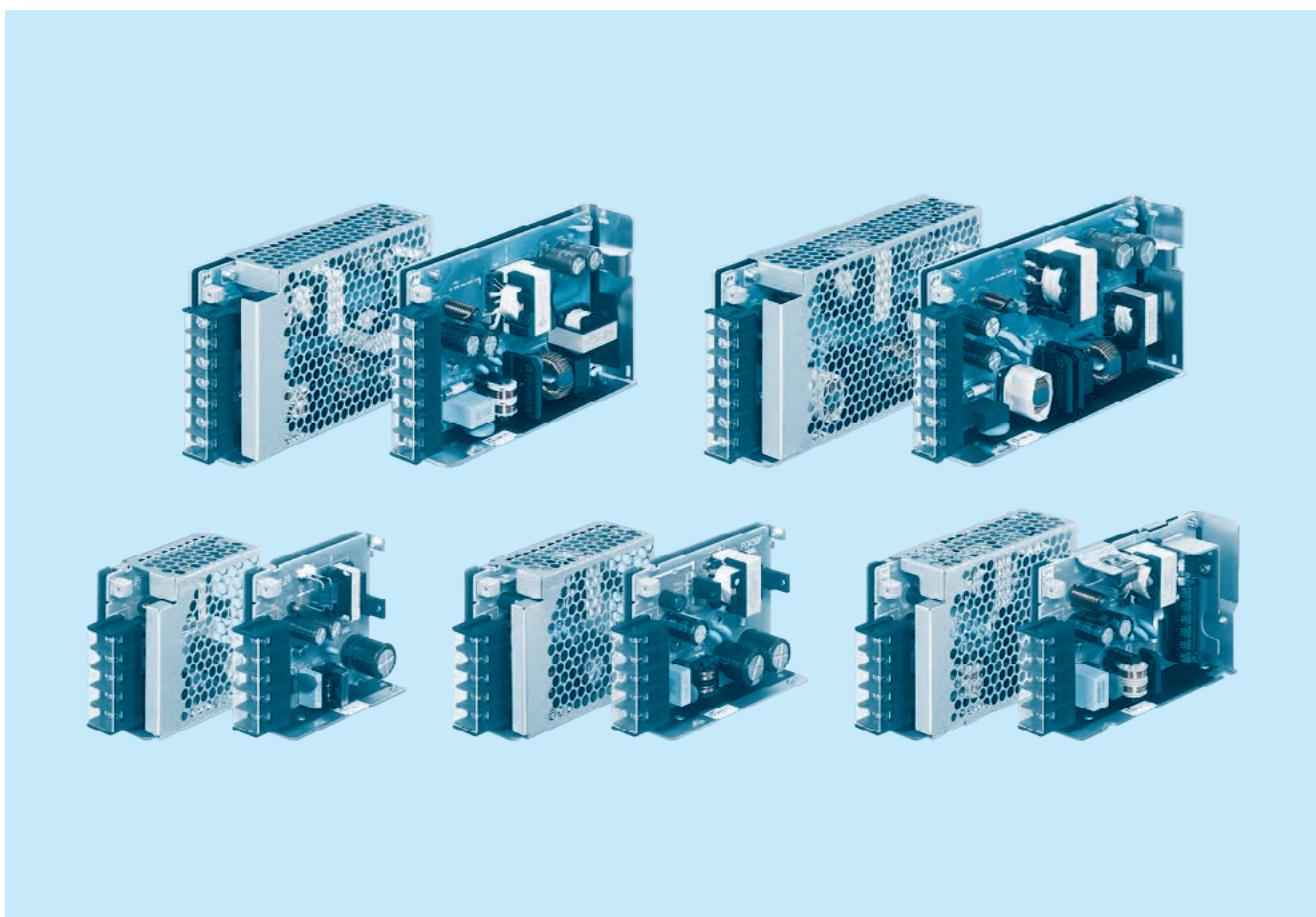

■ Feature

High efficiency
Low noise
Complies with SEMI F47
Harmonic attenuator (Complies with IEC61000-3-2)
Universal input (85-264VAC)
Built-in inrush current, overcurrent and overvoltage protection circuits

■ Safety agency approvals

UL62368-1, c-UL (equivalent to CAN/CSA-C22.2 No.62368-1),
EN62368-1
Complies with DEN-AN

■ 5-year warranty (refer to Instruction Manual)

■ CE marking

Low Voltage Directive
RoHS Directive

■ UKCA marking

Electrical Equipment Safety Regulations
RoHS Regulations

■ EMI

Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part 15-B, FCC Part 18-B, VCCI-B

■ EMS Compliance : EN61204-3, EN61000-6-2

EN61000-4-2
EN61000-4-3
EN61000-4-4
EN61000-4-5
EN61000-4-6
EN61000-4-8
EN61000-4-11

PDA15F


Ordering information

PD A 15 F -□ -□

① ② ③ ④ ⑤ ⑥ ⑦ ⑧



RoHS

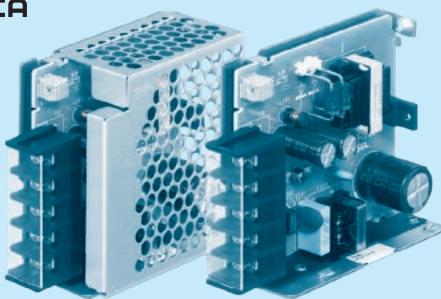Example recommended EMI/EMC filter
NAC-06-472High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter
may be recommended in view of the
other devices that could be connected
in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *1
N: with cover

For option details, refer to
Instruction Manual 6.

* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PDA15F-5	PDA15F-12	PDA15F-24
MAX OUTPUT WATTAGE[W]	*2 15	15.6	16.8
DC OUTPUT	*2 5V 3A	12V 1.3A	24V 0.7A

SPECIFICATIONS

	MODEL	PDA15F-5	PDA15F-12	PDA15F-24
INPUT	VOLTAGE[VAC]	*2 85 - 264 1φ (Refer to "Derating" and Instruction Manual 1.1)		
	CURRENT[A]	ACIN 100V 0.35typ ACIN 230V 0.19typ		
	FREQUENCY[Hz]	50 / 60 (45 - 440)		
	EFFICIENCY[%]	ACIN 100V 75.0typ ACIN 230V 78.5typ	78.5typ 81.5typ	81.0typ 83.5typ
	INRUSH CURRENT[A]	ACIN 100V 15typ (Io=100%) at cold start ACIN 230V 35typ (Io=100%) at cold start		
	LEAKAGE CURRENT[mA]	0.15 / 0.30max (ACIN 100V / 240V, 60Hz, Io=100%, According to IEC62368-1, and DEN-AN)		
	VOLTAGE[V]	5	12	24
	CURRENT[A]	*2 3.0	1.3	0.7
	LINE REGULATION[mV]	*3 20max	48max	96max
	LOAD REGULATION[mV]	*3 40max	100max	150max
OUTPUT	RIPPLE[mVp-p]	0 to +55°C 80max -20 to 0°C 140max Io=0 to 15% 300max	120max 160max 300max	120max 160max 300max
		0 to +55°C 120max -20 to 0°C 160max Io=0 to 15% 360max	150max 180max 360max	150max 180max 360max
		0 to +55°C 50max -20 to +55°C 60max	120max 150max	240max 290max
	DRIFT[mV]	*5 20max	48max	96max
	START-UP TIME[ms]	80typ (ACIN 100V, Io=100%)		
	HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%) / 150typ (ACIN 230V, Io=100%)		
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	4.50 to 5.50	10.0 to 13.2	19.2 to 27.0
	OUTPUT VOLTAGE SETTING[V]	5.00 to 5.15	12.00 to 12.48	24.00 to 24.96
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically		
	OVERVOLTAGE PROTECTION	5.75 to 7.00	15.0 to 18.0	30.0 to 37.0
PROTECTION CIRCUIT AND OTHERS	REMOTE SENSING	Not provided		
	INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)		
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)		
ENVIRONMENT	OUTPUT-FG	AC500V 1minute, Cutoff current = 25mA, DC500V 100MΩ min (At Room Temperature)		
	OPERATING TEMP., HUMID. AND ALTITUDE	*2 -20 to +70°C, 20 - 90%RH (Non condensing), 5,000m (16,500feet) max		
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max		
	VIBRATION	10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis		
SAFETY AND NOISE REGULATIONS	IMPACT	196.1m/s² (20G), 11ms, once each X, Y and Z axis		
	AGENCY APPROVALS	UL62368-1, c-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN		
	CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B		
OTHERS	HARMONIC ATTENUATOR	*6 Complies with IEC61000-3-2 (Class A) (No built-in power factor correction)		
	CASE SIZE/WEIGHT	31 X 78 X 85mm [1.22 X 3.07 X 3.35 inches] (without terminal block) (W X H X D) / 180g max (with cover : 210g max)		
	COOLING METHOD	*2 Convection/Forced air (Requires external fan) (Refer to "Derating")		

*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.

*2 Derating is required. Please contact us for DC input.

*3 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.

*4 This is the value that measured on measuring board with capacitor of 22 μF at 150mm from output terminal.

Measured by 20MHz oscilloscope or Ripple-Noise meter

(Equivalent to KEISOKU-GIKEN:RM104).

Ripple and ripple noise spec is change at Io=0 to 15% by burst operation.

*5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.


*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

*7 To meet the specification, do not operate overload condition.


*8 Parallel operation is not possible.

*9 Sound noise may be generated by power supply in case of pulse load.


Block diagram

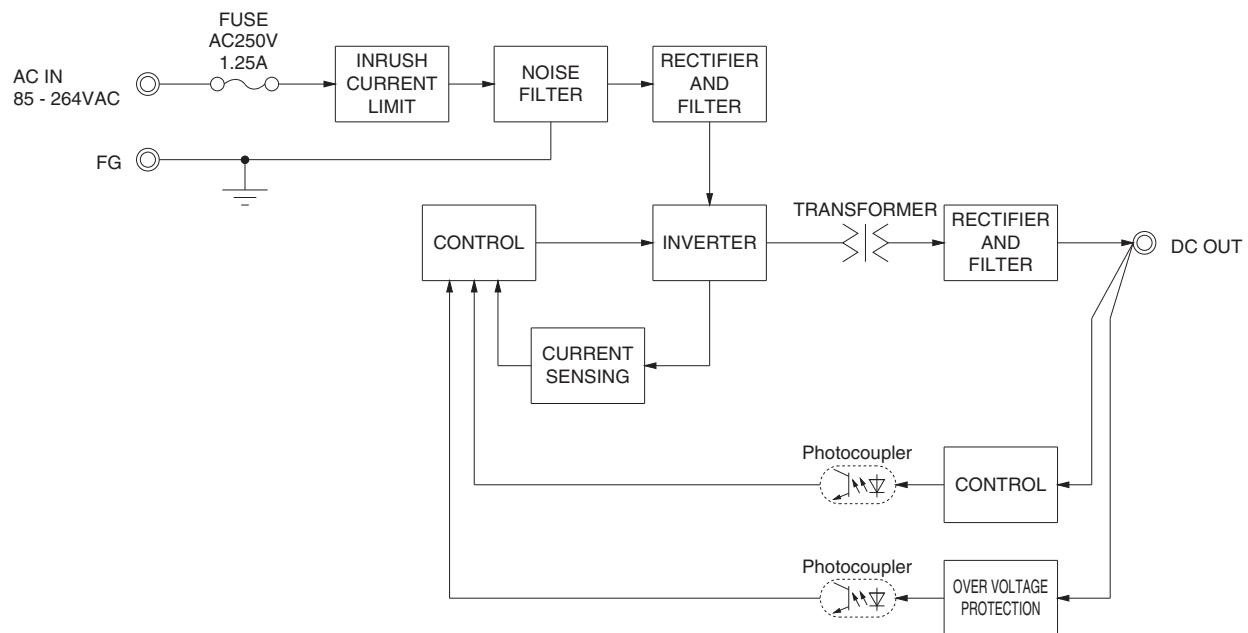

External view

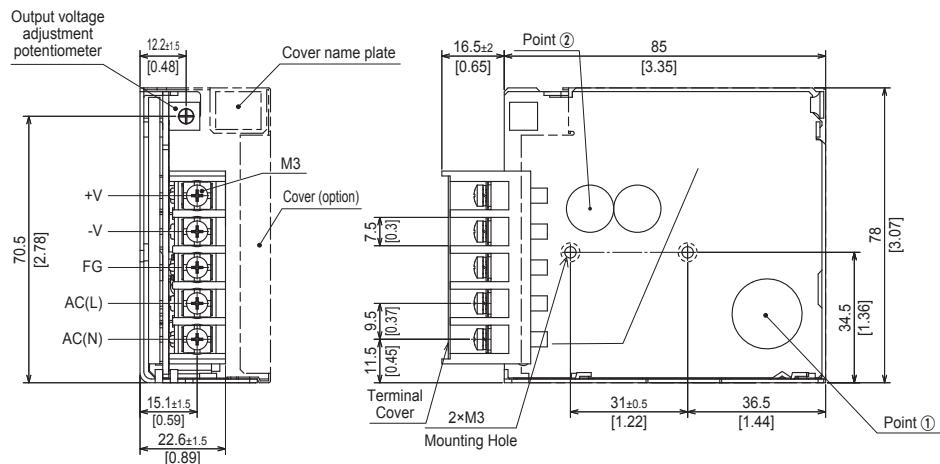

- * Tolerance : ±1 [± 0.04]
- * Weight : 180g max (with cover : 210g max)
- * PCB Material / thickness : CEM3 / 1.6mm [0.06]
- * Chassis material : Galvanized steel plate
- * Dimensions in mm, []= inches
- * Mounting torque : 0.6N · m max
- * Screw tightening torque : M3 0.8N · m max
- * Please connect safety ground to the unit in 2-M3 holes
- * Point ①, Point ② are thermometry points. Please refer to Instruction Manual 3.

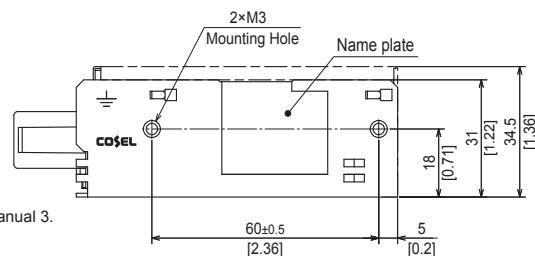

PDA30F


Ordering information

PD A 30 F -□ -□

① ② ③ ④ ⑤ ⑥ ⑦ ⑧



RoHS

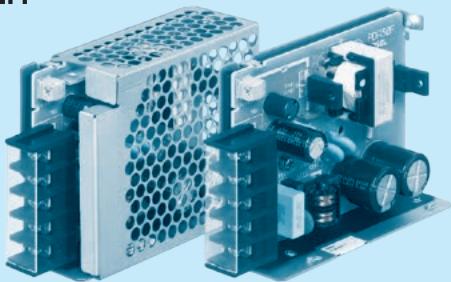
 Example recommended EMI/EMC filter
NAC-06-472

 High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *1
N: with cover

 For option details, refer to
Instruction Manual 6.

* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PDA30F-5	PDA30F-12	PDA30F-24
MAX OUTPUT WATTAGE[W]	*2 30	30	31.2
DC OUTPUT	*2 5V 6A	12V 2.5A	24V 1.3A

SPECIFICATIONS

	MODEL	PDA30F-5	PDA30F-12	PDA30F-24
INPUT	VOLTAGE[VAC]	*2 85 - 264 1φ (Refer to "Derating" and Instruction Manual 1.1)		
	CURRENT[A]	ACIN 100V 0.62typ ACIN 230V 0.32typ		
	FREQUENCY[Hz]	50 / 60 (45 - 440)		
	EFFICIENCY[%]	ACIN 100V 83.0typ ACIN 230V 87.0typ	82.0typ 85.5typ	83.5typ 86.5typ
	INRUSH CURRENT[A]	ACIN 100V 15typ (Io=100%) at cold start ACIN 230V 35typ (Io=100%) at cold start		
	LEAKAGE CURRENT[mA]	0.25 / 0.55 max (ACIN 100V / 240V, 60Hz, Io=100%, According to IEC62368-1, and DEN-AN)		
	VOLTAGE[V]	5	12	24
	CURRENT[A]	*2 6.0	2.5	1.3
	LINE REGULATION[mV]	*3 20max	48max	96max
	LOAD REGULATION[mV]	*3 40max	100max	150max
OUTPUT	RIPPLE[mVp-p]	0 to +55°C 80max -20 to 0°C 140max Io=0 to 15% 300max	120max 160max 300max	120max 160max 300max
		0 to +55°C 120max -20 to 0°C 160max Io=0 to 15% 360max	150max 180max 360max	150max 180max 360max
		0 to +55°C 50max -20 to +55°C 60max	120max 150max	240max 290max
	DRIFT[mV]	*5 20max	48max	96max
	START-UP TIME[ms]	80typ (ACIN 100V, Io=100%)		
	HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%) / 150typ (ACIN 230V, Io=100%)		
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	4.50 to 5.50	10.0 to 13.2	20.4 to 27.0
	OUTPUT VOLTAGE SETTING[V]	5.00 to 5.15	12.00 to 12.48	24.00 to 24.96
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically		
	OVERVOLTAGE PROTECTION	5.75 to 7.00	15.0 to 18.0	30.0 to 37.0
PROTECTION CIRCUIT AND OTHERS	REMOTE SENSING	Not provided		
	INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)		
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)		
ENVIRONMENT	OUTPUT-FG	AC500V 1minute, Cutoff current = 25mA, DC500V 100MΩ min (At Room Temperature)		
	OPERATING TEMP., HUMID. AND ALTITUDE	*2 -20 to +70°C, 20 - 90%RH (Non condensing), 5,000m (16,500feet) max		
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max		
	VIBRATION	10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis		
SAFETY AND NOISE REGULATIONS	IMPACT	196.1m/s² (20G), 11ms, once each X, Y and Z axis		
	AGENCY APPROVALS	UL62368-1, c-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN		
	CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B		
OTHERS	HARMONIC ATTENUATOR	*6 Complies with IEC61000-3-2 (Class A) (No built-in power factor correction)		
	CASE SIZE/WEIGHT	31 X 78 X 103mm [1.22 X 3.07 X 4.06 inches] (without terminal block) (W X H X D) / 250g max (with cover : 280g max)		
	COOLING METHOD	*2 Convection/Forced air (Requires external fan) (Refer to "Derating")		

*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.

*2 Derating is required. Please contact us for DC input.

*3 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.

*4 This is the value that measured on measuring board with capacitor of 22 μF at 150mm from output terminal.

Measured by 20MHz oscilloscope or Ripple-Noise meter

(Equivalent to KEISOKU-GIKEN:RM104).

Ripple and ripple noise spec is change at Io=0 to 15% by burst operation.

*5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.


*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

* To meet the specification, do not operate overload condition.


* Parallel operation is not possible.

* Sound noise may be generated by power supply in case of pulse load.

Block diagram

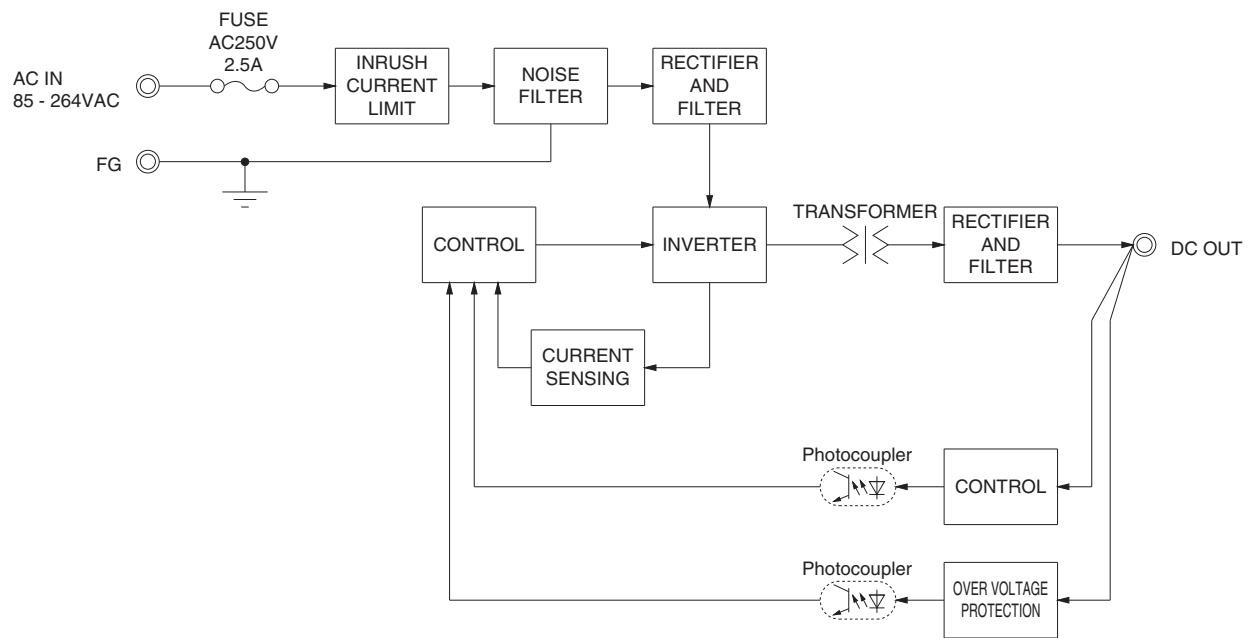

External view

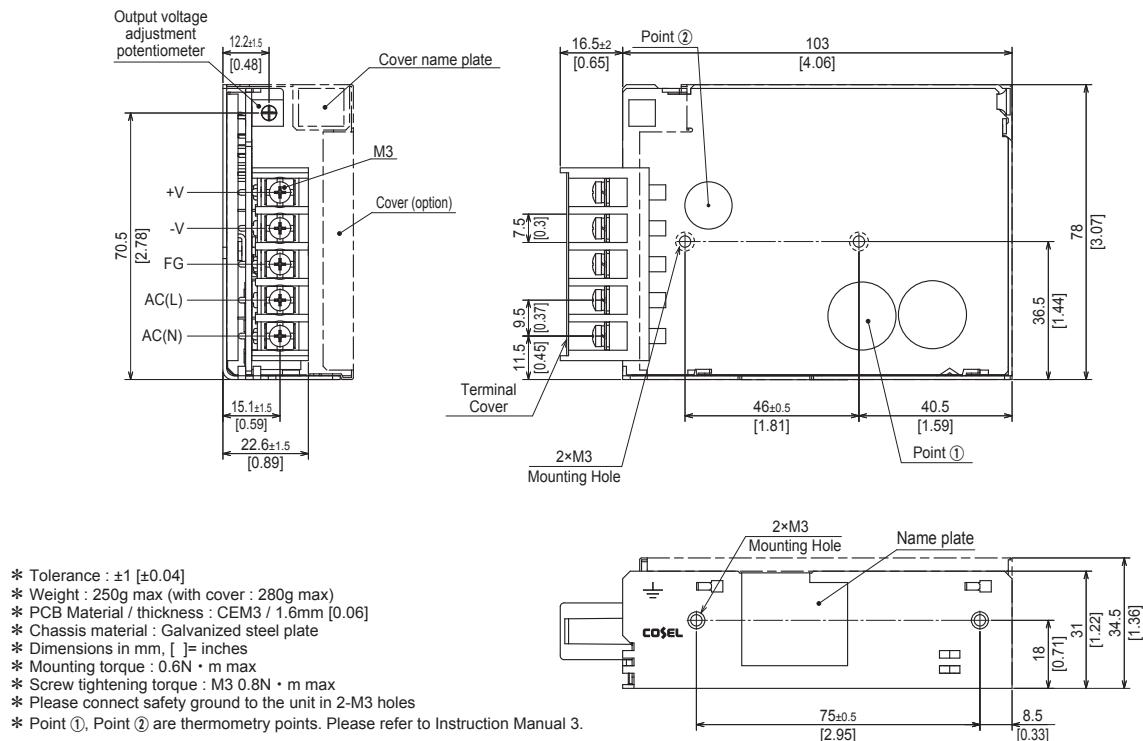

PDA50F

Ordering information

PD A 50 F -□ -□

① ② ③ ④ ⑤ ⑥ ⑦ ⑧



RoHS


 Example recommended EMI/EMC filter
NAC-06-472


- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *1
N: with cover

 High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

 For option details, refer to
Instruction Manual 6.

* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PDA50F-5	PDA50F-12	PDA50F-24
MAX OUTPUT WATTAGE[W]	*2 50	51.6	52.8
DC OUTPUT	*2 5V 10A	12V 4.3A	24V 2.2A

SPECIFICATIONS

	MODEL	PDA50F-5	PDA50F-12	PDA50F-24
INPUT	VOLTAGE[VAC]	*2 85 - 264 1φ (Refer to Instruction Manual 1.1)		
	CURRENT[A]	ACIN 100V 1.05typ ACIN 230V 0.52typ		
	FREQUENCY[Hz]	50 / 60 (45 - 440)		
	EFFICIENCY[%]	ACIN 100V 81.5typ ACIN 230V 85.0typ	82.5typ 85.0typ	85.0typ 87.5typ
	INRUSH CURRENT[A]	ACIN 100V 15typ (Io=100%) at cold start ACIN 230V 35typ (Io=100%) at cold start		
	LEAKAGE CURRENT[mA]	0.3 / 0.65 max (ACIN 100V / 240V, 60Hz, Io=100%, According to IEC62368-1, and DEN-AN)		
	VOLTAGE[V]	5	12	24
	CURRENT[A]	*2 10	4.3	2.2
	LINE REGULATION[mV]	*3 20max	48max	96max
	LOAD REGULATION[mV]	*3 40max	100max	150max
OUTPUT	RIPPLE[mVp-p]	0 to +50°C 80max -20 to 0°C 140max Io=0 to 15% 300max	120max 160max 300max	120max 160max 300max
		0 to +50°C 120max -20 to 0°C 160max Io=0 to 15% 360max	150max 180max 360max	150max 180max 360max
		0 to +50°C 50max -20 to +50°C 60max	120max 150max	240max 290max
	DRIFT[mV]	*5 20max	48max	96max
	START-UP TIME[ms]	80typ (ACIN 100V, Io=100%)		
	HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%) / 140typ (ACIN 230V, Io=100%)		
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	4.00 to 5.50	10.0 to 13.2	19.2 to 27.0
	OUTPUT VOLTAGE SETTING[V]	5.00 to 5.15	12.00 to 12.48	24.00 to 24.96
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically		
	OVERVOLTAGE PROTECTION	5.75 to 7.00	15.0 to 18.0	30.0 to 37.0
PROTECTION CIRCUIT AND OTHERS	REMOTE SENSING	Not provided		
	INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)		
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)		
ENVIRONMENT	OUTPUT-FG	AC500V 1minute, Cutoff current = 25mA, DC500V 100MΩ min (At Room Temperature)		
	OPERATING TEMP., HUMID. AND ALTITUDE	*2 -20 to +70°C, 20 - 90%RH (Non condensing), 5,000m (16,500feet) max		
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max		
	VIBRATION	10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis		
SAFETY AND NOISE REGULATIONS	IMPACT	196.1m/s² (20G), 11ms, once each X, Y and Z axis		
	AGENCY APPROVALS	UL62368-1, c-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN		
	CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B		
OTHERS	HARMONIC ATTENUATOR	*6 Complies with IEC61000-3-2 (Class A) (No built-in power factor correction)		
	CASE SIZE/WEIGHT	31 X 82 X 120mm [1.22 X 3.23 X 4.72 inches] (without terminal block) (W X H X D) / 330g max (with cover : 370g max)		
	COOLING METHOD	*2 Convection/Forced air (Requires external fan) (Refer to "Derating")		

*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.

*2 Derating is required. Please contact us for DC input.

*3 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.

*4 This is the value that measured on measuring board with capacitor of 22 μF at 150mm from output terminal.

Measured by 20MHz oscilloscope or Ripple-Noise meter

(Equivalent to KEISOKU-GIKEN:RM104).

Ripple and ripple noise spec is change at Io=0 to 15% by burst operation.

*5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.


*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

* To meet the specification, do not operate overload condition.


* Parallel operation is not possible.

* Sound noise may be generated by power supply in case of pulse load.

Block diagram

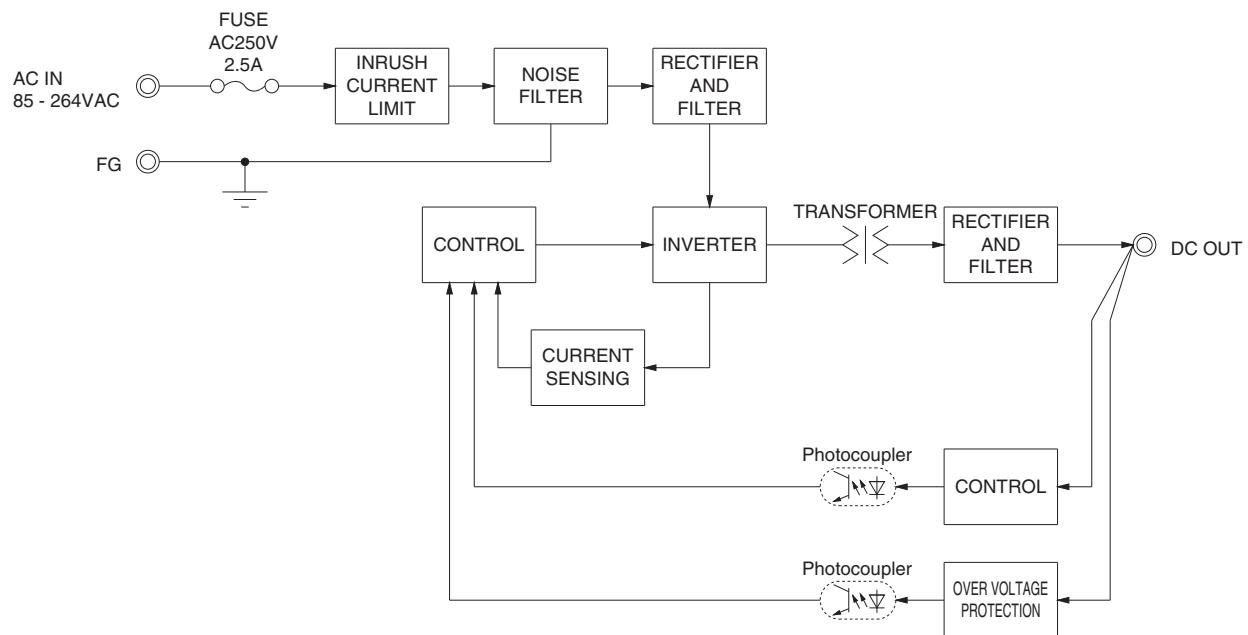

External view

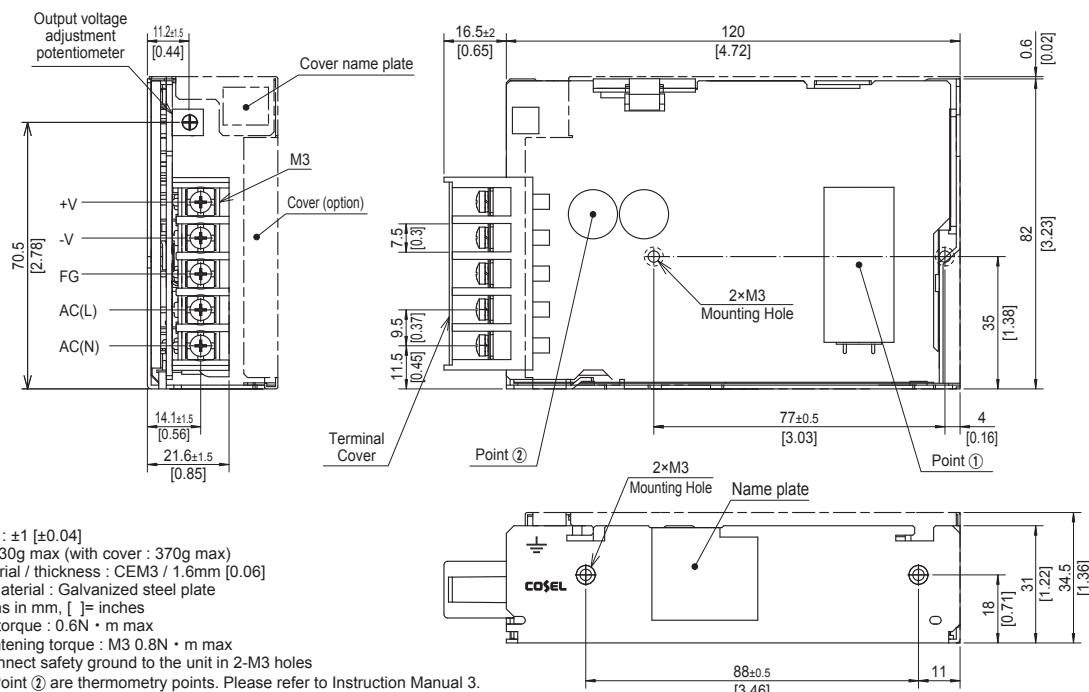

- * Tolerance : ±1 [±0.04]
- * Weight : 330g max (with cover : 370g max)
- * PCB Material / thickness : CEM3 / 1.6mm [0.06]
- * Chassis material : Galvanized steel plate
- * Dimensions in mm, []= inches
- * Mounting torque : 0.6N · m max
- * Screw tightening torque : M3 0.8N · m max
- * Please connect safety ground to the unit in 2-M3 holes
- * Point ①, Point ② are thermometry points. Please refer to Instruction Manual 3.

PDA100F


Ordering information

PD A 100 F -□ -□

① ② ③ ④ ⑤ ⑥



RoHS

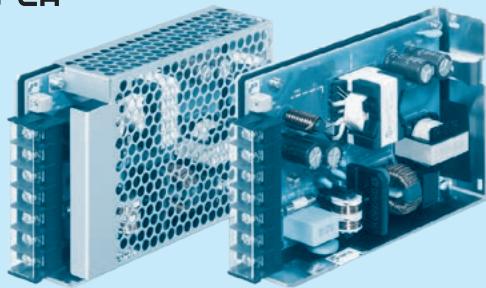Example recommended EMI/EMC filter
NAC-06-472

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *1
N: with cover

High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

For option details, refer to
Instruction Manual 6.

* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PDA100F-5	PDA100F-12	PDA100F-15	PDA100F-24
MAX OUTPUT WATTAGE[W]	*2 100	102	105	108
DC OUTPUT	*2 5V 20A	12V 8.5A	15V 7A	24V 4.5A

SPECIFICATIONS

	PDA100F-5	PDA100F-12	PDA100F-15	PDA100F-24
VOLTAGE[VAC]	*2 85 - 264 1φ (Refer to Instruction Manual 1.1)			
CURRENT[A]	ACIN 100V 1.3typ ACIN 230V 0.6typ			
FREQUENCY[Hz]	50 / 60 (45 - 66)			
EFFICIENCY[%]	ACIN 100V 87.0typ ACIN 230V 89.5typ	88.5typ 91.0typ	88.5typ 91.0typ	87.5typ 89.5typ
POWER FACTOR (Io=100%)	ACIN 100V 0.97typ ACIN 230V 0.87typ			
INRUSH CURRENT[A]	ACIN 100V 15typ (Io=100%) at cold start ACIN 230V 35typ (Io=100%) at cold start			
LEAKAGE CURRENT[mA]	0.4 / 0.75 max (ACIN 100V / 240V, 60Hz, Io=100%, According to IEC62368-1, and DEN-AN)			
VOLTAGE[V]	5	12	15	24
CURRENT[A]	*2 20	8.5	7	4.5
LINE REGULATION[mV]	*3 20max	48max	60max	96max
LOAD REGULATION[mV]	*3 40max	100max	120max	150max
RIPPLE[mVp-p]	0 to +50°C 80max -20 to 0°C 140max Io=0 to 15% 300max	120max 160max 360max	120max 160max 500max	120max 160max 500max
RIPPLE NOISE[mVp-p]	0 to +50°C 120max -20 to 0°C 160max Io=0 to 15% 360max	150max 180max 400max	150max 180max 600max	150max 180max 600max
TEMPERATURE REGULATION[mV]	0 to +50°C 50max -20 to +50°C 60max	120max 150max	150max 180max	240max 290max
DRIFT[mV]	*5 20max	48max	60max	96max
START-UP TIME[ms]	100typ (ACIN 100V, Io=100%)			
HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%)			
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	4.00 to 5.50	10.00 to 13.20	13.20 to 18.00	19.20 to 27.00
OUTPUT VOLTAGE SETTING[V]	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96
PROTECTION	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically		
CIRCUIT AND OTHERS	OVERVOLTAGE PROTECTION	5.75 to 7.00	15.00 to 18.00	20.00 to 25.00
	REMOTE SENSING	Not provided		30.00 to 37.00
ISOLATION	INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)		
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)		
	OUTPUT-FG	AC500V 1minute, Cutoff current = 25mA, DC500V 100MΩ min (At Room Temperature)		
ENVIRONMENT	OPERATING TEMPERATURE,HUMID	*2 -20 to +70°C, 20 - 90%RH (Non condensing)		
	STORAGE TEMPERATURE,HUMID	-20 to +75°C, 20 - 90%RH (Non condensing)		
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis		
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis		
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL62368-1, c-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN		
	CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B		
	HARMONIC ATTENUATOR *6	Complies with IEC61000-3-2 (Class A)		
OTHERS	CASE SIZE/WEIGHT	32X93X147mm [1.26x3.66x5.79 inches] (without terminal block) (W×H×D) / 440g max (with cover : 500g max)		
	COOLING METHOD	*2 Convection/Forced air (Refer to "Derating")		

*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.

(Equivalent to KEISOKU-GIKEN:RM104).

*2 Derating is required. Please contact us for DC input.

Ripple and ripple noise spec is change at Io=0 to 15% by burst operation.

*3 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.

*5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.

*4 This is the value that measured on measuring board with capacitor of 22 μF at 150mm from output terminal.

*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.


Measured by 20MHz oscilloscope or Ripple-Noise meter

*7 To meet the specification, do not operate overload condition.


*8 Parallel operation is not possible.

*9 Sound noise may be generated by power supply in case of pulse load.

Block diagram

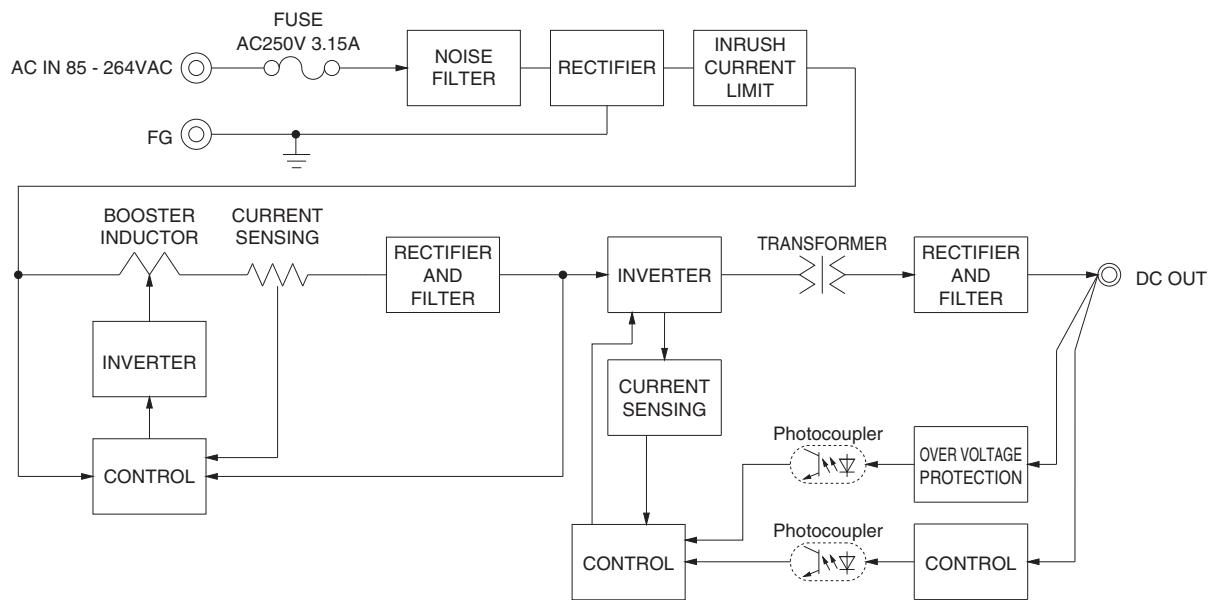

External view

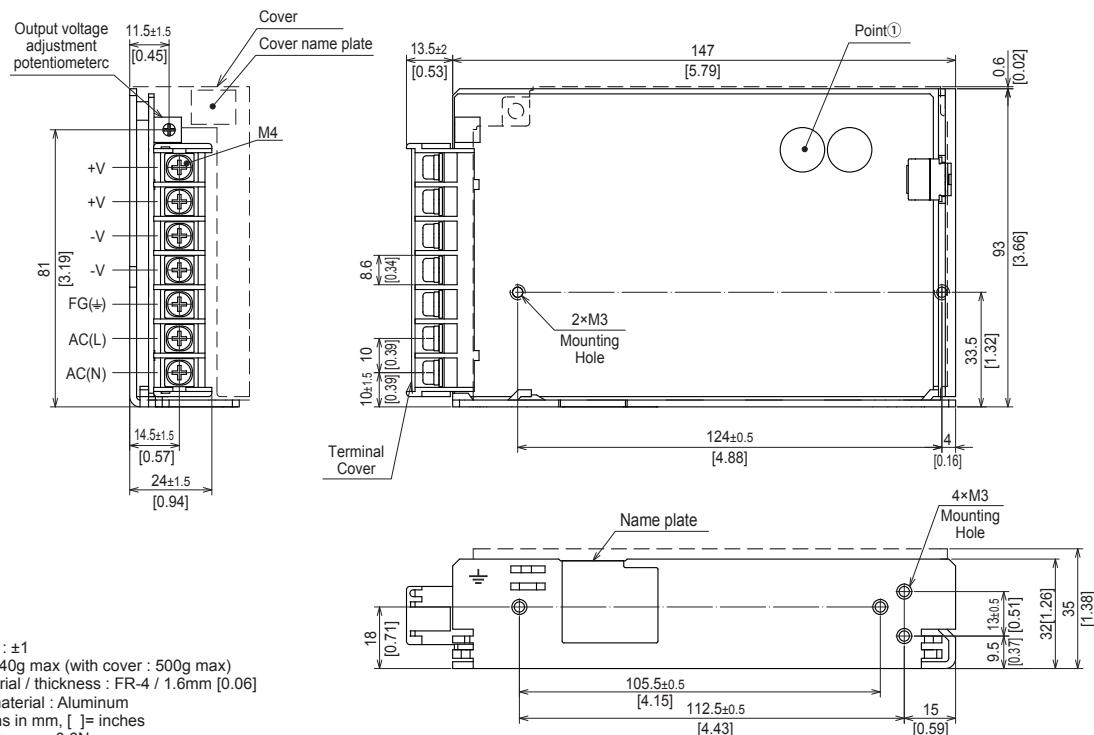

* Tolerance : ±1

* Weight : 440g max (with cover : 500g max)

* PCB Material / thickness : FR-4 / 1.6mm [0.06]

* Chassis material : Aluminum

* Dimensions in mm, [] = inches

* Mounting torque : 0.6N · m max

* Screw tightening torque : M4 1.6N · m max

* Please connect safety ground to the FG terminal on the unit.

* Point ① is the thermometry points. Please refer to Instruction Manual 3.

PDA150F


Ordering information

PD A 150 F -□ -□

① ② ③ ④ ⑤ ⑥ ⑦ ⑧



RoHS

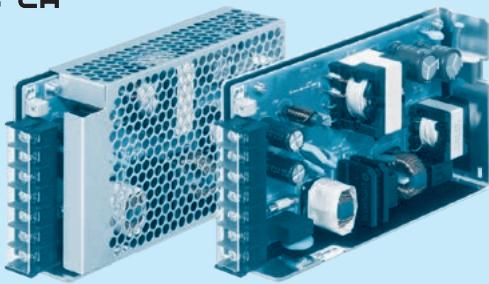

Example recommended EMI/EMC filter
NAC-06-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter
may be recommended in view of the
other devices that could be connected
in parallel with the power supply.

① Series name
② Single output
③ Output wattage
④ Universal input
⑤ Output voltage
⑥ Optional *1
N: with cover

For option details, refer to
Instruction Manual 6.

* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	PDA150F-5	PDA150F-12	PDA150F-15	PDA150F-24
MAX OUTPUT WATTAGE[W]	*2 150	156	150	156
DC OUTPUT	*2 5V 30A	12V 13A	15V 10A	24V 6.5A

SPECIFICATIONS

	PDA150F-5	PDA150F-12	PDA150F-15	PDA150F-24
INPUT				
VOLTAGE[VAC]	*2 85 - 264 1φ (Refer to Instruction Manual 1.1)			
CURRENT[A]	ACIN 100V 1.8typ ACIN 230V 0.9typ			
FREQUENCY[Hz]	50 / 60 (45 - 66)			
EFFICIENCY[%]	ACIN 100V 85.0typ ACIN 230V 87.5typ	87.0typ 89.0typ	88.5typ 89.5typ	87.0typ 89.0typ
POWER FACTOR (Io=100%)	ACIN 100V 0.97typ ACIN 230V 0.87typ			
INRUSH CURRENT[A]	ACIN 100V 15typ (Io=100%) at cold start ACIN 230V 35typ (Io=100%) at cold start			
LEAKAGE CURRENT[mA]	0.4 / 0.75 max (ACIN 100V / 240V, 60Hz, Io=100%, According to IEC62368-1, and DEN-AN)			
VOLTAGE[V]	5	12	15	24
CURRENT[A]	30	13	10	6.5
LINE REGULATION[mV]	*3 20max	48max	60max	96max
LOAD REGULATION[mV]	*3 40max	100max	120max	150max
RIPPLE[mVp-p]	0 to +50°C 80max -20 to 0°C 140max Io=0 to 15% 300max	120max 160max 360max	120max 160max 500max	120max 160max 500max
OUTPUT				
RIPPLE NOISE[mVp-p]	0 to +50°C 120max -20 to 0°C 160max Io=0 to 15% 360max	150max 180max 400max	150max 180max 600max	150max 180max 600max
TEMPERATURE REGULATION[mV]	0 to +50°C 50max -20 to +50°C 60max	120max 150max	150max 180max	240max 290max
DRIFT[mV]	*5 20max	48max	60max	96max
START-UP TIME[ms]	120typ (ACIN 100V, Io=100%)			
HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%)			
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	4.00 to 5.50	10.00 to 13.20	13.20 to 18.00	19.20 to 27.00
OUTPUT VOLTAGE SETTING[V]	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96
PROTECTION	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically		
CIRCUIT AND OTHERS	OVERVOLTAGE PROTECTION	5.75 to 7.00	15.00 to 18.00	20.00 to 25.00
	REMOTE SENSING	Not provided		30.00 to 37.00
ISOLATION	INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)		
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)		
	OUTPUT-FG	AC500V 1minute, Cutoff current = 25mA, DC500V 100MΩ min (At Room Temperature)		
ENVIRONMENT	OPERATING TEMPERATURE,HUMID	*2 -20 to +70°C, 20 - 90%RH (Non condensing)		
	STORAGE TEMPERATURE,HUMID	-20 to +75°C, 20 - 90%RH (Non condensing)		
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis		
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis		
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	*6 UL62368-1, c-UL (equivalent to CAN/CSA-C22.2No.62368-1), EN62368-1, Complies with DEN-AN		
	CONDUCTED NOISE	Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part15-B, FCC Part18-B, VCCI-B		
	HARMONIC ATTENUATOR	*7 Complies with IEC61000-3-2 (Class A)		
OTHERS	CASE SIZE/WEIGHT	34X93X168mm [1.34x3.66x6.61 inches] (without terminal block) (W×H×D) / 530g max (with cover : 600g max)		
	COOLING METHOD	*2 Convection/Forced air (Refer to "Derating")		

*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.

*2 Derating is required. Please contact us for DC input.

*3 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.

*4 This is the value that measured on measuring board with capacitor of 22 μF at 150mm from output terminal.

Measured by 20MHz oscilloscope or Ripple-Noise meter

(Equivalent to KEISOKU-GIKEN:RM104).

Ripple and ripple noise spec is change at Io=0 to 15% by burst operation.

*5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.


*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

*7 To meet the specification, do not operate overload condition.


*8 Parallel operation is not possible.

*9 Sound noise may be generated by power supply in case of pulse load.

Block diagram

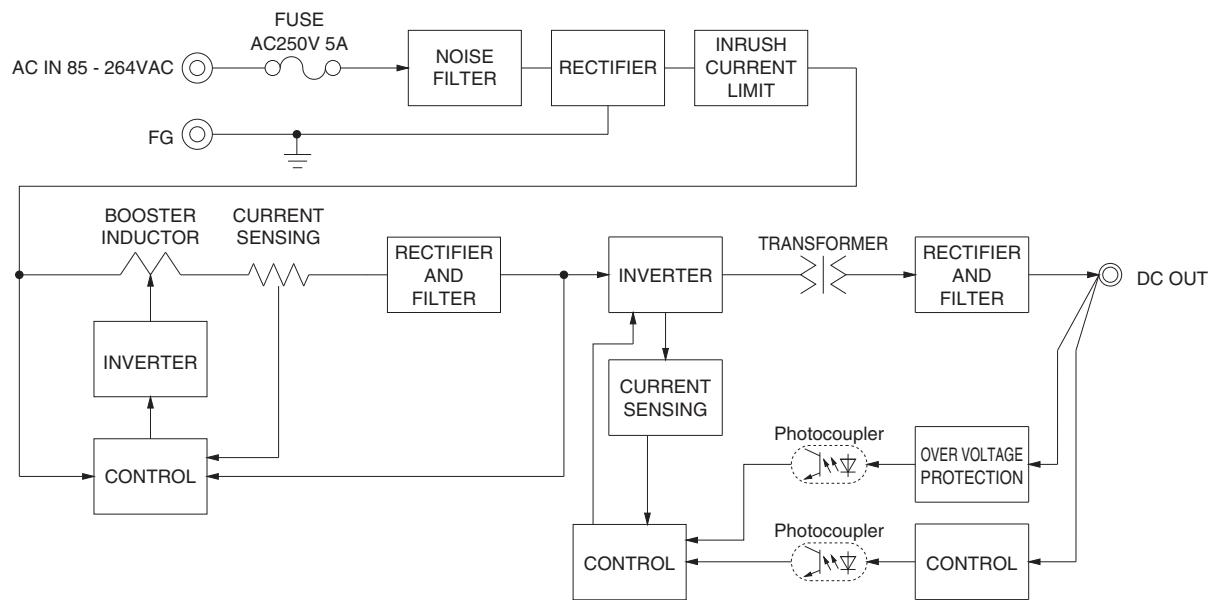

External view

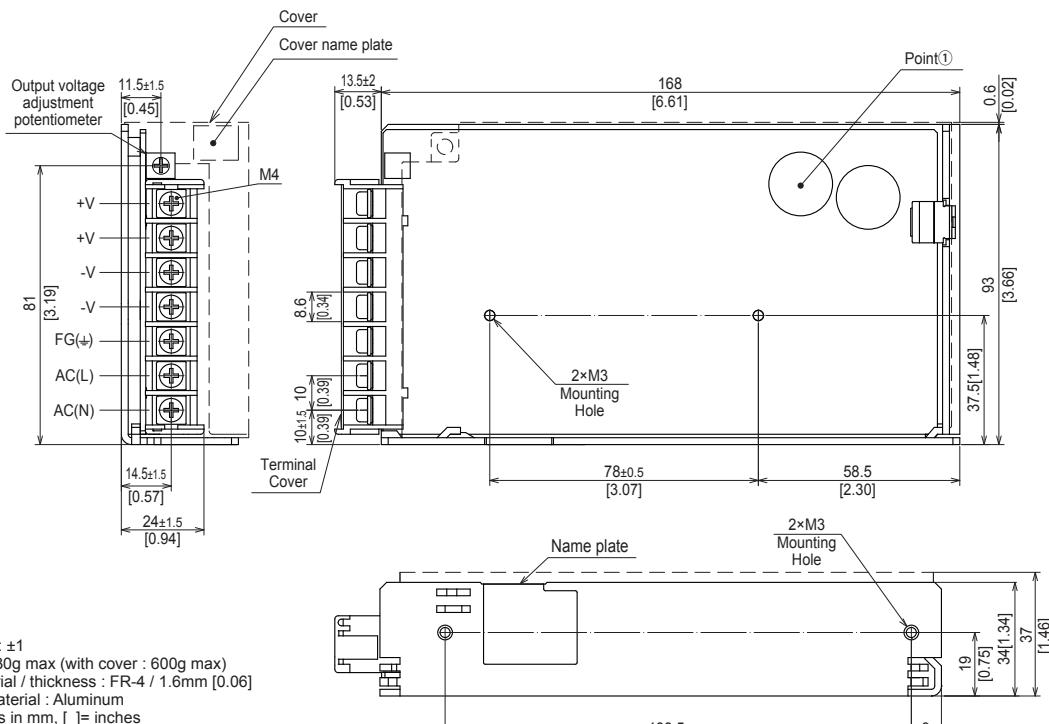

- * Tolerance : ± 1
- * Weight : 530g max (with cover : 600g max)
- * PCB Material / thickness : FR-4 / 1.6mm [0.06]
- * Chassis material : Aluminum
- * Dimensions in mm, [] = inches
- * Mounting torque : 0.6N · m max
- * Screw tightening torque : M4 1.6N · m max
- * Please connect safety ground to the FG terminal on the unit.
- * Keep drawing current per pin below 20A for TB1.
- * Point ① is the thermometry points. Please refer to Instruction Manual 3.


Assembling and Installation Method

Installation method

■ For the metal chassis, keep the distance $d1$ for isolation between component and metal chassis.

The $d1$ dimension is the distance required for insulation and does not satisfy cooling conditions. For cooling conditions, please refer to "Derating" and section 3 of the instruction manual.

■ Do not insert a screw more than 6mm from the outside of a power supply to keep enough insulation distance between the screw and internal components.

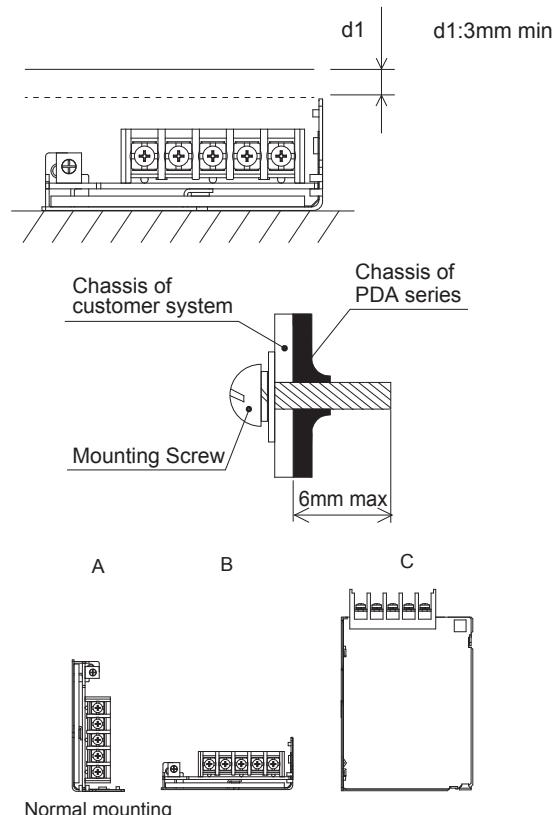


■ If you use two or more power supplies side by side, please keep a sufficient distance between them to allow enough air ventilation.


■ Ambient temperature around each power supply should not exceed the temperature range shown in "Derating".

Derating


Derating curve for input voltage PDA15F, PDA30F



PDA15F Ambient temperature derating curve (Reference value)

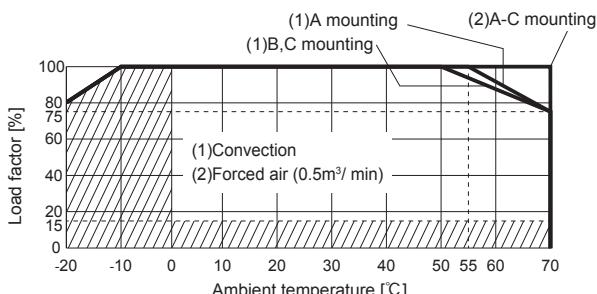


PDA15F-□-N Ambient temperature derating curve (Reference value)

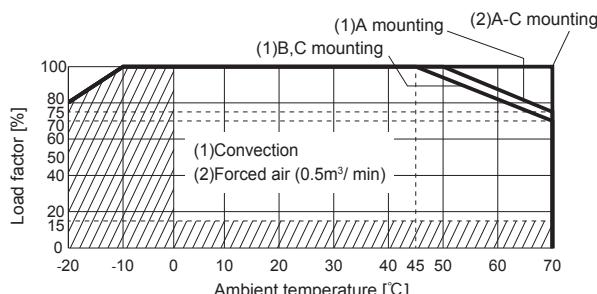

Derating


● PDA30F

Ambient temperature derating curve
(Reference value)

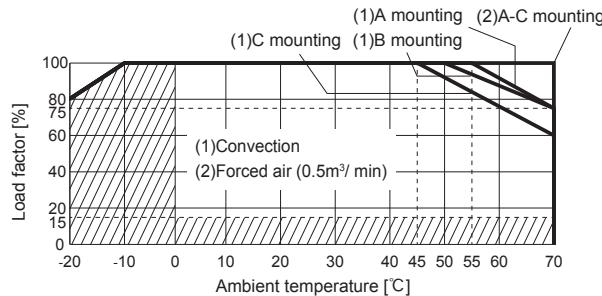


● PDA30F-□-N

Ambient temperature derating curve
(Reference value)

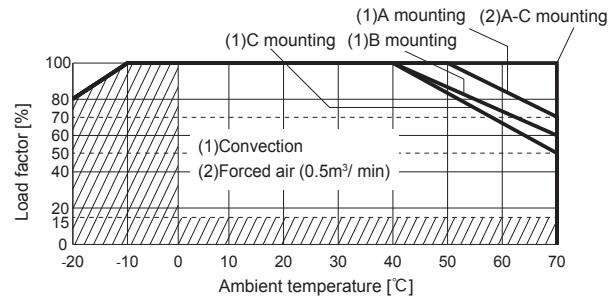


● PDA50F-5

Ambient temperature derating curve
(Reference value)

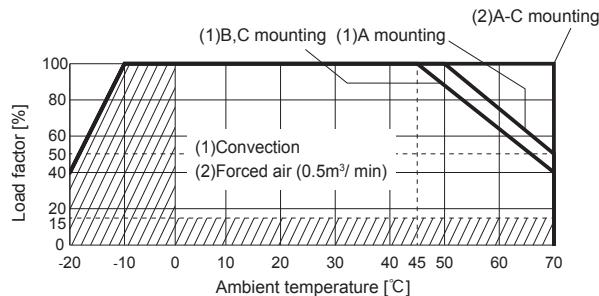


● PDA50F-5-N

Ambient temperature derating curve
(Reference value)

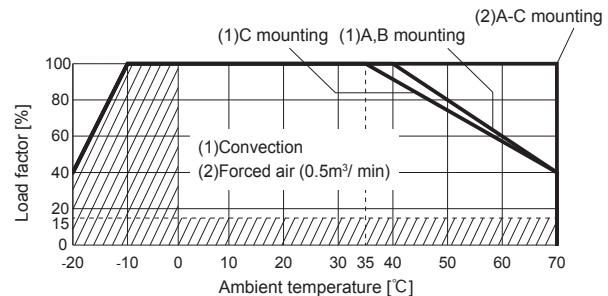


● PDA50F-12, -24

Ambient temperature derating curve
(Reference value)

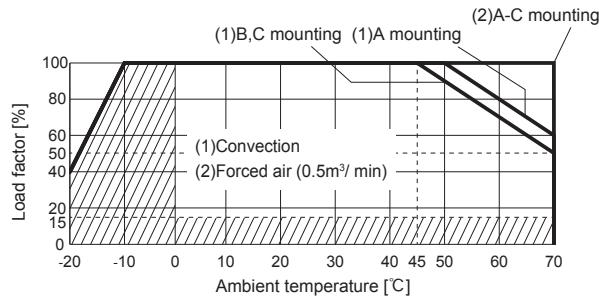


● PDA50F-12-N, -24-N

Ambient temperature derating curve
(Reference value)

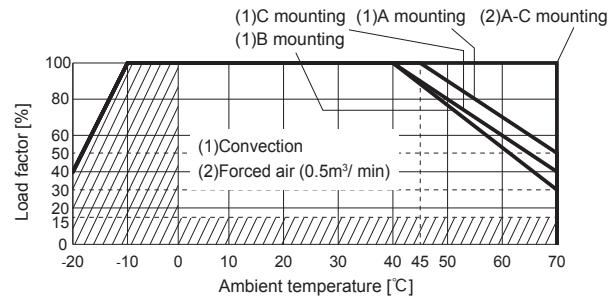


● PDA100F

Ambient temperature derating curve
(Reference value)

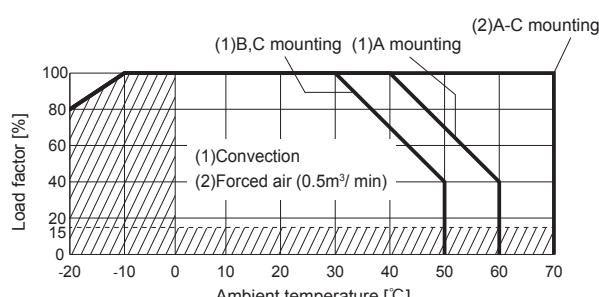


● PDA100F-□-N

Ambient temperature derating curve
(Reference value)

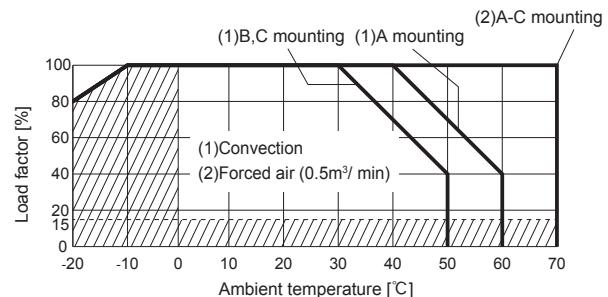


Derating


● PDA150F-5

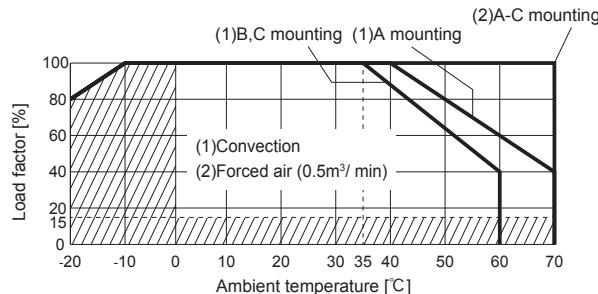Ambient temperature derating curve
(Reference value)


● PDA150F-5-N

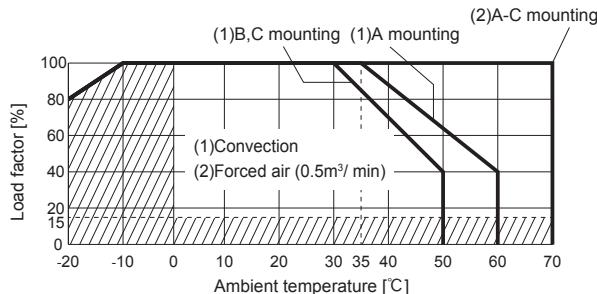Ambient temperature derating curve
(Reference value)

● PDA150F-12, -15, -24

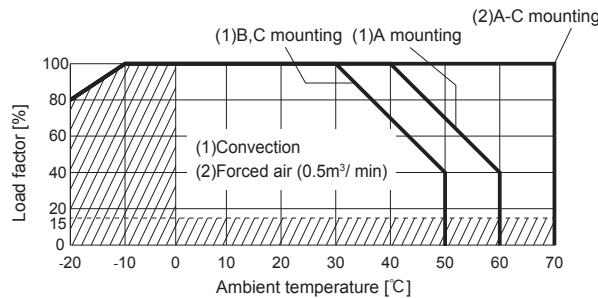Ambient temperature derating curve
(Reference value)

● PDA150F-12-N, -15-N, -24-N

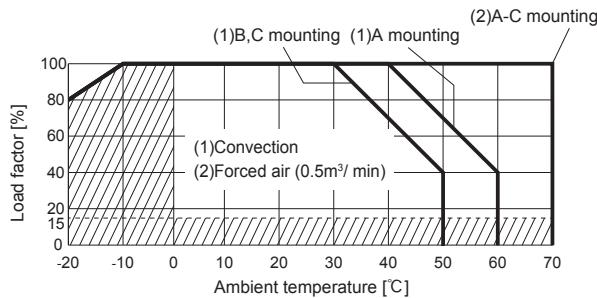Ambient temperature derating curve
(Reference value)

- The operating ambient temperature is different by with / without chassis cover or mounting position.
- In the hatched area, the specification of Ripple, Ripple Noise is different from other area.
- The ambient temperature should be measured 5 to 10 cm away from the power supply so that it won't be influenced by the heat from the power supply.
- Please make sure the maximum component temperature rise given in Instruction manual 3 is not exceeded.
- Please contact us for more information about operating ambient temperature.

Instruction Manuals

◆ Please see catalog and instruction manual before you use.

Instruction Manuals <https://www.cosel.co.jp/redirect/catalog/en/PDA/>
Before using our product <https://en.cosel.co.jp/technical/caution/index.html>

PDA



NOTICE



Basic Characteristics Data

Model	Circuit method	Switching frequency [kHz] *1 *2	Input current *3 [A]	Inrush current protection	PCB/Pattern			Series/Parallel operation availability	
					Material	Single sided	Double	Series operation	Parallel operation
PDA15F	Flyback converter	20 to 125	0.35	Thermistor	CEM-3	Yes	-	Yes	No
PDA30F	Flyback converter	30 to 130	0.62	Thermistor	CEM-3	Yes	-	Yes	No
PDA50F	Flyback converter	25 to 130	1.05	Thermistor	CEM-3	Yes	-	Yes	No
PDA100F	Active filter	20 to 250	1.3	Thermistor	FR-4	-	Yes	Yes	No
	Flyback converter	45 to 110							
PDA150F	Active filter	20 to 250	1.8	Thermistor	FR-4	-	Yes	Yes	No
	Flyback converter	45 to 110							

*1 The value changes depending on input and load.

*2 At light load, burst operation is performed to reduce input power. The switching frequency is changed by using condition. Please contact us for more details.

*3 The value of input current is at ACIN 100V and rated load.