

RL78/G24

Timer RD2 in Timer Mode (PWM Function)

Introduction

This document describes a method to output a PWM waveform using the timer mode's PWM function (hereinafter referred to as PWM function) in the RL78/G24 timer RD2.

Target Device

RL78/G24

When applying the sample program covered in this application note to another microcomputer, modify the program according to the specifications for the target microcomputer and conduct an extensive evaluation of the modified program.

Contents

1. Specifications	3
1.1 Specification overview	3
1.2 Operation overview	4
1.2.1 Output Waveform	4
2. Operation Confirmation Conditions	6
3. Hardware Description	7
3.1 Example of Hardware Configuration	7
3.2 List of used Pins	7
4. Software Description	8
4.1 Smart Configurator Settings	8
4.1.1 System Configuration	8
4.1.2 Component Configurations	10
4.2 Folder Structure	11
4.3 List of Option Byte Settings	12
4.4 List of Constants	12
4.5 List of Variables	12
4.6 List of Functions	12
4.7 Function Specifications	13
4.8 Flowchart	14
4.8.1 Main Process	14
4.9 r_Config_TRD0_trd0_interrupt function	15
5. Sample Code	16
6. Reference Documents	16
Revision History	17

1. Specifications

1.1 Specification overview


Three PWM waveforms with 100 μ s periods are output.

Table 1-1 lists the Peripheral Function and Its Application. Figure 1-1 shows the Output Timing Diagram.

Table 1-1 Peripheral Functions and Their Usage

Peripheral	Usage
Timer RD2 (Timer RD20)	PWM waveform output

Figure 1-1 PWM Output Timing Diagram

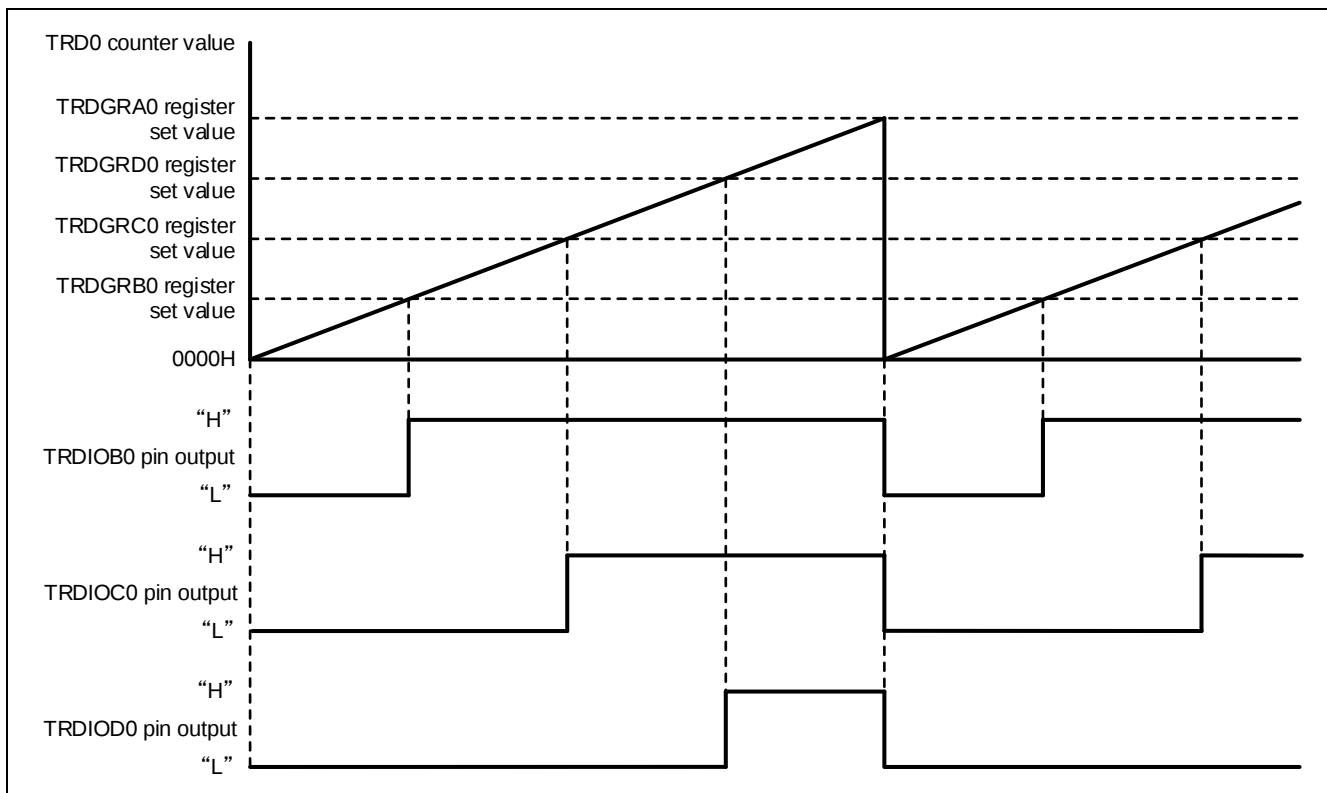

1.2 Operation overview

Three PWM waveforms with 100 μ s periods are output using the PWM function. Output signals are shown below.

- TRDIOB0 pin output: Inactive level low period (25 μ s) → Active level high period (75 μ s)
- TRDIOC0 pin output: Inactive level low period (50 μ s) → Active level high period (50 μ s)
- TRDIOD0 pin output: Inactive level low period (75 μ s) → Active level high period (25 μ s)

Timer RD2 settings are shown below.

<Settings>

- Set the timer RD2 for PWM output.
- Set the count source to fTRD (96MHz).
- Configure the counter to continue counting even after a compare match with the TRDGRA0.
- Set both the TRDGRC0 and TRDGRD0 register functionalities as general registers.
- For the PWM output setting, set the PWM period to 100 μ s and the duty cycles: 75% for TRDGRB0, 50% for TRDGRC0, and 25% for TRDGRD0.
- For TRDGRB0, TRDGRC0, and TRDGRD0, set the initial output to the non-active level and the output level to high active.
- Do not set pulse output forced cutoff.
- Enable the TRDGRA0 compare match interrupt.

1.2.1 Output Waveform

Below is a description for calculating the PWM period and PWM waveform output from each pin.

(1) PWM period:

Calculate the PWM period as follows:

$$\begin{aligned} 100 [\mu\text{s}] &= (1 / 96 [\text{MHz}]) \times (\text{TRDGRA0} + 1) \\ &= 10.42 [\text{ns}] \times 9600 \end{aligned}$$

(2) PWM output of the TRDIOB0 pin

Calculate the low inactive level period of the TRDIOB0 pin as follows:

$$\begin{aligned} 25 [\mu\text{s}] &= (1 / 96 [\text{MHz}]) \times (\text{TRDGRB0} + 1) \\ &= 10.42 [\text{ns}] \times 2400 \end{aligned}$$

(3) PWM output of the TRDIOC0 pin

Calculate the low inactive level period of the TRDIOC0 pin as follows:

$$\begin{aligned} 50 [\mu\text{s}] &= (1 / 96 [\text{MHz}]) \times (\text{TRDGRC0} + 1) \\ &= 10.42 [\text{ns}] \times 4800 \end{aligned}$$

(4) PWM output of the TRDIOD0 pin


Calculate the low inactive level period of the TRDIOD0 pin as follows:

$$\begin{aligned} 75 [\mu\text{s}] &= (1 / 96 [\text{MHz}]) \times (\text{TRDGRD0} + 1) \\ &= 10.42 [\text{ns}] \times 7200 \end{aligned}$$

Figure 1-2 shows the timing of the PWM function of timer RD2.

- (1) The output at the TRDIOB0 terminal changes due to a compare match between the TRD0 counter value and the TRDGRB0 register set value.
- (2) The output at the TRDIOC0 terminal changes due to a compare match between the TRD0 counter value and the TRDGRC0 register set value.
- (3) The output at the TRDIOD0 terminal changes due to a compare match between the TRD0 counter value and the TRDGRD0 register set value.
- (4) Because of a compare match between the TRD0 counter value and the TRDGRA0 register set value, the TRD0 counter value is cleared. Additionally, the INTTRD0 interrupt occurs.
- (5) Within the INTTRD0 interrupt processing, the program clears the compare match flag A (IMFA flag) in the timer RD status register 0 (TRDSR0 register).

Figure 1-2 Timing of the PWM function of timer RD2

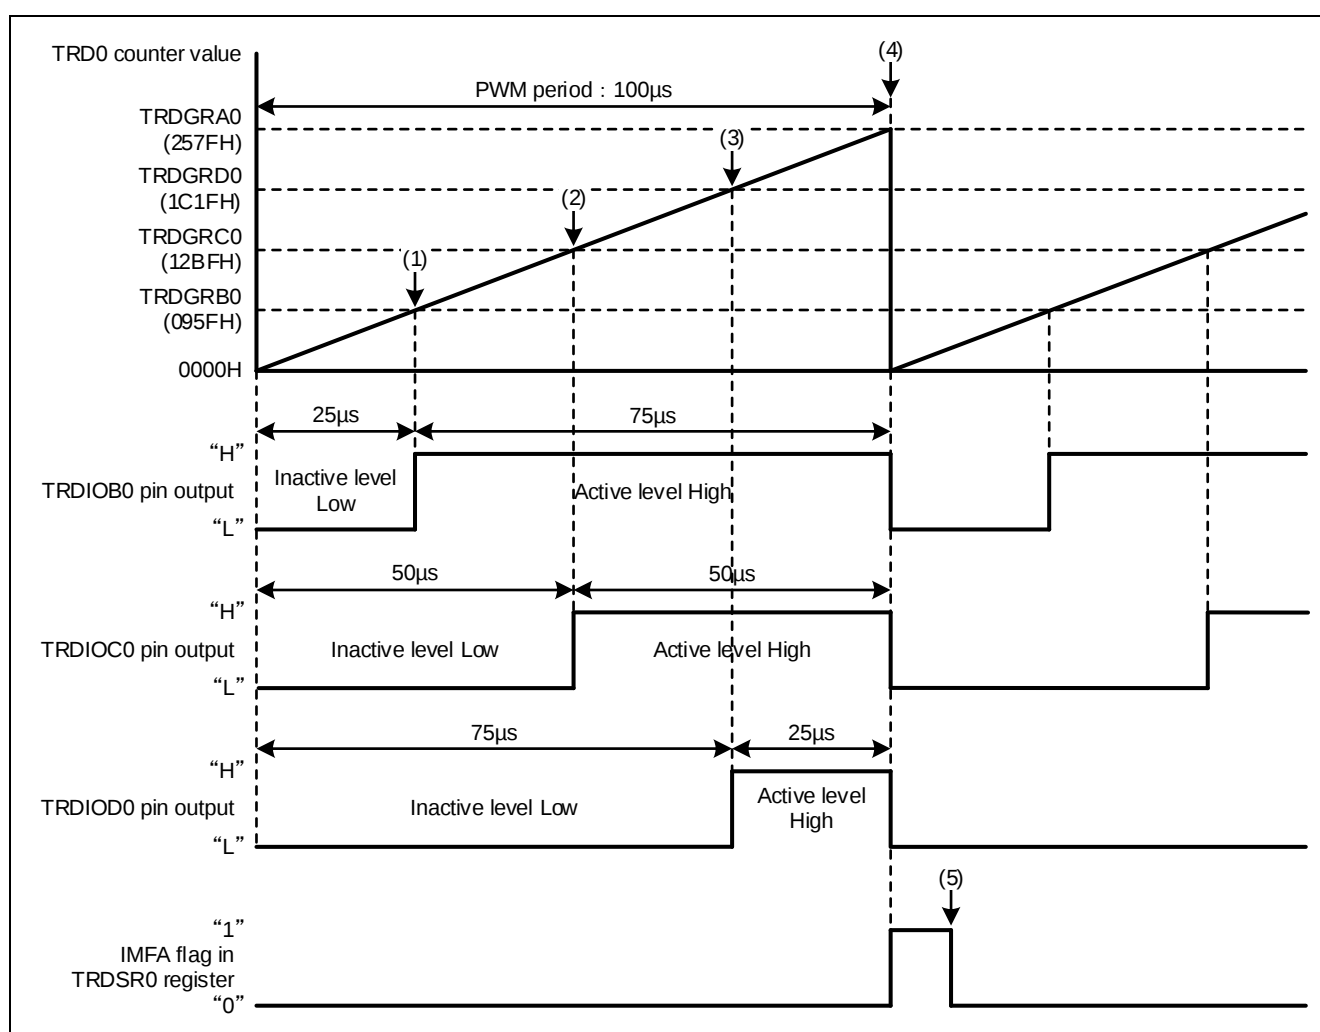

2. Operation Confirmation Conditions

The sample code described in this application note has been confirmed under the following conditions.

Table 2-1 Operation Confirmation Conditions


Item	Description
MCU used	RL78/G24 (R7F101GLG)
Operating frequency	- High-Speed On-Chip Oscillator Clock (fHOCO): 8MHz - PLL Oscillator Circuit Output (fPLL): 96MHz - CPU/Peripheral Hardware Clock (fCLK): 48MHz
Operating voltage	3.3V (Can operate between 2.7V to 5.5V) - LVD0 Operation (VLVD0): Reset Mode - Rising edge = 2.97V - Falling edge = 2.91V
Integrated development environment (CS+)	CS+ for CC V8.10.00 Manufactured by Renesas Electronics
C compiler (CS+)	CC-RL V1.12.01 Manufactured by Renesas Electronics
Integrated development environment (e ² studio)	e ² studio 2023-07 (23.7.0) Manufactured by Renesas Electronics
C compiler (e ² studio)	CC-RL V1.12.00 Manufactured by Renesas Electronics
Integrated development Environment (IAR)	IAR Embedded Workbench for Renesas RL78 V4.21.1 Manufactured by IAR Systems
C compiler (IAR)	
Smart Configurator	V.1.7.0
Board Support Package (r_bsp)	V.1.60
Emulator	CS+, e ² studio: COM port IAR: E2 Emulator Lite
Board used	RL78/G24 Fast Prototyping Board (RTK7RLG240C00000BJ)

3. Hardware Description

3.1 Example of Hardware Configuration

Figure 3-1 shows the hardware configuration example used in the sample code for this application.

Figure 3-1 Example of Hardware Configuration

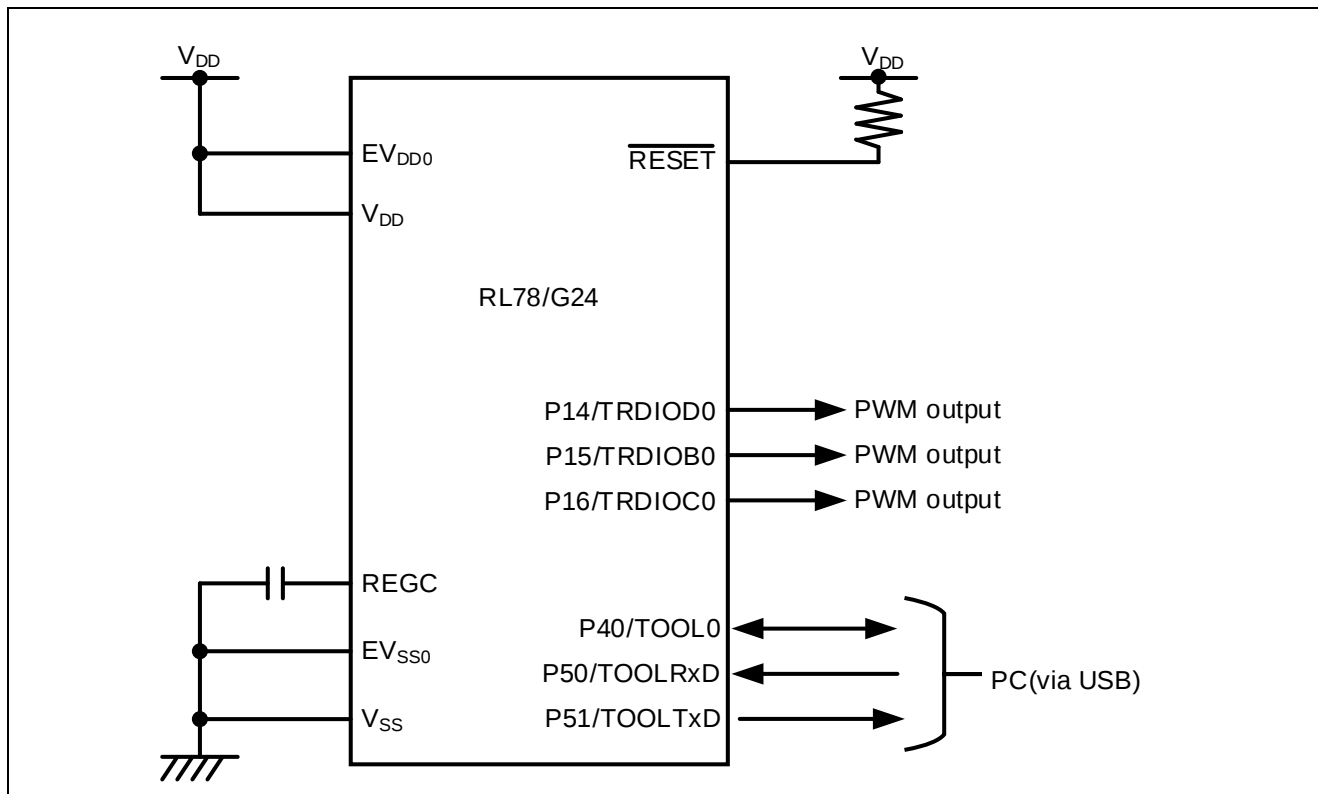

Note 1. This simplified circuit diagram was created to show an overview of connections only. When actually designing your circuit, make sure the design includes appropriate pin handling and meets electrical characteristic requirements (connect each input-only port to VDD or VSS through a resistor).

Note 2. Connect any pins whose name begins with EVSS to VSS, and any pins whose name begins with EVDD to VDD, respectively.

Note 3. VDD must not be lower than the reset release voltage (VLVD0) that is specified for the LVD0.

3.2 List of used Pins

Table 3-1 shows the pins used and their functions.

Table 3-1 Pins Used and Their Functions

Pin name	I/O	Function
P14/TRDIOD0	Input	PWM Output
P15/TRDIOB0	Input	PWM Output
P16/TRDIOC0	Input	PWM Output

Caution: In this application note, only the used pins are processed. When actually designing your circuit, make sure the design includes sufficient pin processing and meets electrical characteristic requirements.

4. Software Description

4.1 Smart Configurator Settings

This section presents the settings of the Smart Configurator used in this sample program. The items and settings in each table for the Smart Configurator are described as they appear in the configuration screen.

4.1.1 System Configuration

The system configuration used in this sample program are shown below.

Note that the system settings used in this sample program are the same for the integrated development environments e2 studio and CS+, but different for IAR. Please adjust the settings appropriately according to the environment you are using.

Firstly, Figure 4-1 shows the system configuration used in this sample program (for e2 studio and CS+).

If you are conducting a COM port debug on the RL78/G24 Fast Prototyping Board (RTK7RLG240C00000BJ), it is necessary to set the integrated development environments (e2 studio and CS+) appropriately. For details, please refer to the "RL78/G24 Fast Prototyping Board User's Manual (R20UT5091)", specifically "7.1 Using COM Port Debugging with the e² studio" and "7.2 Using COM Port Debugging in CS+".

Figure 4-1 System Configuration (e² studio, CS+)

The screenshot shows the 'System configuration' window with the following settings:

- On-chip debug setting**
 - On-chip debug operation setting: ☐ Unused, ☐ Use emulator, ☒ COM Port
 - Emulator setting: ☐ E2, ☒ E2 Lite
 - Pseudo-RRM/DMM function setting: ☐ Unused, ☒ Used
 - Start/Stop function setting: ☒ Unused, ☐ Used
 - Monitoring point function setting: ☒ Unused, ☐ Used
 - Trace function setting: ☐ Unused, ☒ Used
- Security ID setting**
 - ☒ Use security ID
 - Security ID: 0x00000000000000000000
- Security ID authentication failure setting**
 - ☒ Do not erase flash memory data
 - ☐ Erase flash memory data

Two blue boxes labeled 'Check' point to the 'COM Port' radio button and the 'Do not erase flash memory data' radio button, respectively.

Figure 4-2 shows the system configurations used in this sample program for IAR.

Figure 4-2 System Configurations (IAR)

System configuration

▼ On-chip debug setting

On-chip debug operation setting
☐ Unused ☒ Use emulator ☐ COM Port

Emulator setting
☐ E2 ☒ E2 Lite

Pseudo-RRM/DMM function setting
☐ Unused ☒ Used

Start/Stop function setting
☒ Unused ☐ Used

Monitoring point function setting
☒ Unused ☐ Used

Trace function setting
☐ Unused ☒ Used

Security ID setting
☒ Use security ID
Security ID

Security ID authentication failure setting
☒ Do not erase flash memory data ☐ Erase flash memory data

Check

4.1.2 Component Configurations

This section presents the component configurations used in this sample program.

Table 4-1 Component Configurations (Timer RD2)

Item	Content
Component	PWM output
Configuration Name	Config_TRD0
Function	PWM function
Resource	TRD0

Figure 4-3 Configuration of Timer RD20

The screenshot shows the configuration interface for Timer RD20. The following settings are visible and annotated:

- Count source setting:**
 - Clock source: fTRD (Clock frequency: 96000 kHz, fPLL is selected as fTRD)
 - External clock edge select: Rising edge
- Counter setting:**
 - Counter operation: Count continues after TRDGRA0 compare match
- Register function setting:**
 - TRDGRC0: General register
 - TRDGRD0: General register
- PWM output setting:**
 - PWM period: 100 μ s (Actual value: 100)
 - ☒ TRDGRB0 Duty: 75 (%) (Actual value: 75%)
 - ☒ TRDGRC0 Duty: 50 (%) (Actual value: 50%)
 - ☒ TRDGRD0 Duty: 25 (%) (Actual value: 25%)
- Output setting:**
 - TRDIOB0 pin: Initial output: Non-active level, Output level: "H" active
 - TRDIOC0 pin: Initial output: Non-active level, Output level: "H" active
 - TRDIOD0 pin: Initial output: Non-active level, Output level: "H" active
- Pulse output forced cutoff setting:**
 - ☐ Enable forced cutoff by INTPO low-level input
 - ☐ Enable forced cutoff by ELC event input
 - TRDIOB0 pin output: Forced cutoff disabled
 - TRDIOC0 pin output: Forced cutoff disabled
 - TRDIOD0 pin output: Forced cutoff disabled
- Interrupt setting:**
 - ☒ Enable TRDGRA0 compare match interrupt
 - ☐ Enable TRDGRB0 compare match interrupt
 - ☐ Enable TRDGRC0 compare match interrupt
 - ☐ Enable TRDGRD0 compare match interrupt
 - ☐ Enable TRD0 overflow interrupt
 - INTTRD0 priority: Level 3 (low)

Annotations in the image include:

- A box labeled "Change to '75'" pointing to the TRDGRB0 Duty field.
- A box labeled "Change to '25'" pointing to the TRDGRD0 Duty field.
- A box labeled "Uncheck" pointing to the checkboxes for TRDGRB0, TRDGRC0, TRDGRD0, and TRD0 overflow interrupt.

4.2 Folder Structure

Table 4-2 shows the structure of the source files/header files used in the sample code. Note that files automatically generated by the integrated development environment and files from the BSP environment are excluded.

Table 4-2 Folder Structure

Folder/File Name	Description	Generated by Smart Configurator
\r01an6893_trd2_pwm<DIR> ^{NOTE 1}	Sample code folder	
\src<DIR>	Program storage folder	
main.c	Sample code source file	
\smc_gen<DIR>	Smart configurator generated folder	√
\Config_TRD0<DIR>	TRD0 program storage folder	√
Config_TRD0.c	TRD0 source file	√
Config_TRD0.h	TRD0 header file	√
Config_TRD0_user.c	TRD0 interrupt source file	√
¥general<DIR>	Initialization and common program storage folder	√
¥r_bsp<DIR>	BSP program storage folder	√
¥r_config<DIR>	Program storage folder	√

Note: "<DIR>" indicates a directory.

Note 1: The sample code for IAR contains the r01an6893_trd2_pwm.ipcf file.

For details on the .ipcf file, please refer to "RL78 Smart Configurator User's Guide: IAR" (R20AN0581).

4.3 List of Option Byte Settings

Figure 4-3 shows the option byte settings.

Table 4-3 Option Byte Settings

Address	Setting Value	Description
000C0H/040C0H	1110 1111B (EFH)	Watchdog Timer stopped operation (Count stops after reset release)
000C1H/040C1H	1111 1011B (FBH)	LVD0 reset mode. Detection voltage: Rising 2.97V / Falling 2.91V
000C2H/040C2H	1110 1010B (EAH)	Flash operation mode: High-speed main mode. High-speed on-chip oscillator frequency: 8MHz
000C3H/040C3H	1000 0101B (85H)	On-chip debug operation allowed

4.4 List of Constants

Constant is not used in the sample code.

4.5 List of Variables

Table 4-4 shows the variables used in the sample code.

The following variables are generated by the Smart Configurator.

Table 4-4 Variables used in the sample code

Type	Variable Name	Contents	Function that uses the variable
uint8_t	g_trdsr0_dummy	dummy variable for the TRDSR0	r_Config_TRD0_trd0_interrupt

4.6 List of Functions

Table 4-5 lists the functions used in the sample code. However, functions generated by the Smart Configurator that have not been modified are excluded.

Table 4-5 List of Functions

Function Name	Description	Source File
main	main process	main.c
r_Config_TRD0_trd0_interrupt	IMFA flag clear process	Config_TRD0_user.c

4.7 Function Specifications

The function specifications of the sample code are presented.

[Function Name] main

Outline	Main process
Header	r_smc_entry.h
Declaration	void main (void);
Explanation	Start the operation of Timer RD20
Arguments	-
Return value	-
Remarks	-

[Function Name] r_Config_TRD0_trd0_interrupt


Outline	Compare Match Flag Clear Process
Header	Config_TRD0.h
Declaration	static void __near r_Config_TRD0_trd0_interrupt(void)
Explanation	IMFA flag clear process
Arguments	-
Return value	-
Remarks	-

4.8 Flowchart

4.8.1 Main Process

Figure 4-4 shows the flowchart for the main process.


Figure 4-4 Main Process

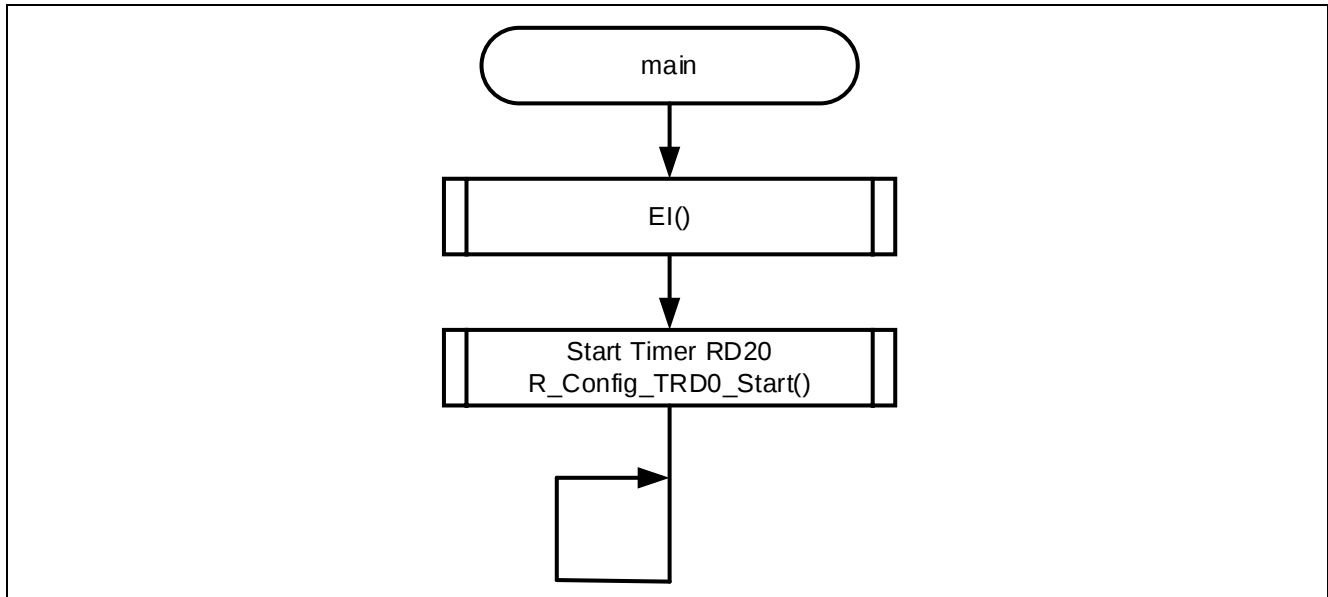

4.9 r_Config_TRD0_trd0_interrupt function

Figure 4-6 shows the flowchart of r_Config_TRD0_trd0_interrupt function

Figure 4-5 r_Config_TRD0_trd0_interrupt function

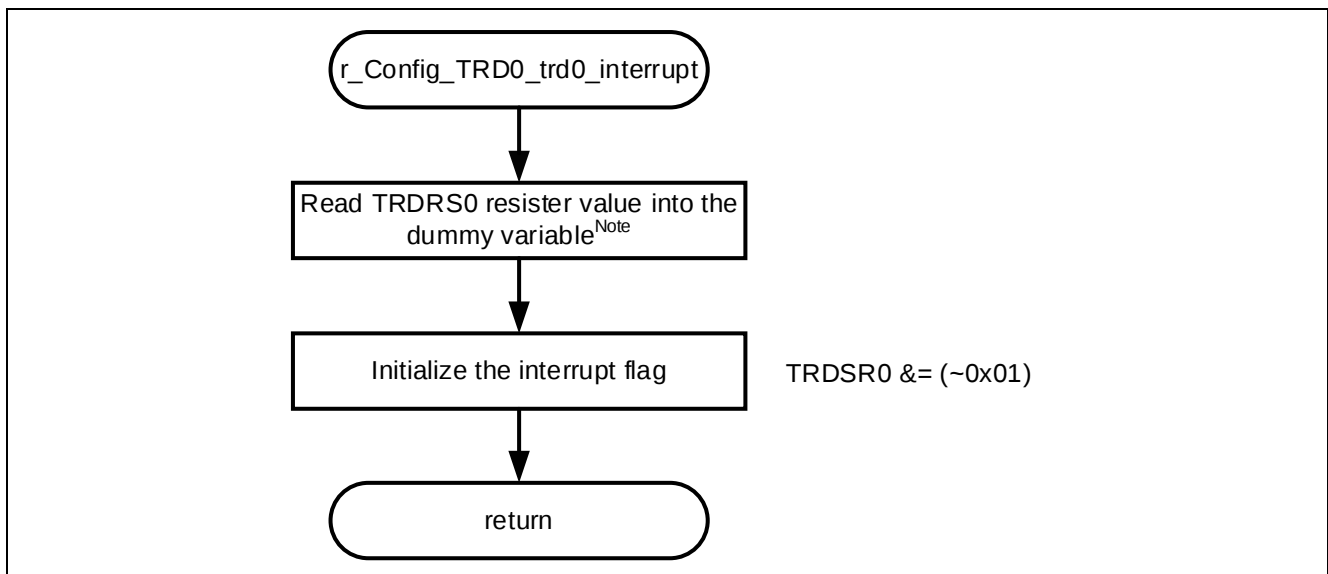

5. Sample Code

Sample code can be downloaded from the Renesas Electronics website.

6. Reference Documents

RL78/G24 User's Manual: Hardware (R01UH0961)

RL78 family User's Manual: Software (R01US0015)

RL78/G24 Fast Prototyping Board User's Manual (R20UT5091)

RL78 Smart Configurator User's Guide: CS+ (R20AN0580)

RL78 Smart Configurator User's Guide: e2 studio (R20AN0579)

RL78 Smart Configurator User's Guide: IAR (R20AN0581)

(The latest version can be downloaded from the Renesas Electronics website.)

Technical Update/Technical News

(The latest version can be downloaded from the Renesas Electronics website.)

Website and Support

Renesas Electronics Website

<http://www.renesas.com/>

Inquiries

<http://www.renesas.com/contact/>

Revision History

Rev.	Date	Description	
		Page	Summary
1.00	Sep.07.23	-	First Edition

General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

1. Precaution against Electrostatic Discharge (ESD)

A strong electrical field, when exposed to a CMOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop the generation of static electricity as much as possible, and quickly dissipate it when it occurs. Environmental control must be adequate. When it is dry, a humidifier should be used. This is recommended to avoid using insulators that can easily build up static electricity.

Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors must be grounded. The operator must also be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions must be taken for printed circuit boards with mounted semiconductor devices.

2. Processing at power-on

The state of the product is undefined at the time when power is supplied. The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the time when power is supplied. In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the time when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the time when power is supplied until the power reaches the level at which resetting is specified.

3. Input of signal during power-off state

Do not input signals or an I/O pull-up power supply while the device is powered off. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Follow the guideline for input signal during power-off state as described in your product documentation.

4. Handling of unused pins

Handle unused pins in accordance with the directions given under handling of unused pins in the manual. The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of the LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible.

5. Clock signals

After applying a reset, only release the reset line after the operating clock signal becomes stable. When switching the clock signal during program execution, wait until the target clock signal is stabilized. When the clock signal is generated with an external resonator or from an external oscillator during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Additionally, when switching to a clock signal produced with an external resonator or by an external oscillator while program execution is in progress, wait until the target clock signal is stable.

6. Voltage application waveform at input pin

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between V_{IL} (Max.) and V_{IH} (Min.) due to noise, for example, the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between V_{IL} (Max.) and V_{IH} (Min.).

7. Prohibition of access to reserved addresses

Access to reserved addresses is prohibited. The reserved addresses are provided for possible future expansion of functions. Do not access these addresses as the correct operation of the LSI is not guaranteed.

8. Differences between products

Before changing from one product to another, for example to a product with a different part number, confirm that the change will not lead to problems. The characteristics of a microprocessing unit or microcontroller unit products in the same group but having a different part number might differ in terms of internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.

7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.
8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.5.0-1 October 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/.