

Shielded Stacked 2x6 RJ45

8P/8C Shielded Stacked and Ganged 2x6 RJ45 Ethernet Connectors



Product Features:

- Shielded RJ45 2x6 Connectors
- Minimum of 750 Mating Cycles
- Multiple Gold Contact Plating Options
- DWV - 1500VAC Contact to Shield
- Current Rating - 1.5A
- Voltage Rating - 150V
- UL94V-0 Flammability Rating


Part Number	Contact Gold Plating (min)	Operating Temp Range	LED Color (L/R)
HCJ26-812SK-L11	6 μ "	-40°C to +85°C	Green/Green
HCJ26-812SK-L12	6 μ "	-40°C to +85°C	Green/Yellow
HCJ26-812SK-L21	6 μ "	-40°C to +85°C	Yellow/Green
HCJ26-814SK-L11	30 μ "	-40°C to +85°C	Green/Green
HCJ26-814SK-L12	30 μ "	-40°C to +85°C	Green/Yellow
HCJ26-814SK-L21	30 μ "	-40°C to +85°C	Yellow/Green
HCJ26-815SK-L11	50 μ "	-40°C to +85°C	Green/Green
HCJ26-815SK-L12	50 μ "	-40°C to +85°C	Green/Yellow
HCJ26-815SK-L21	50 μ "	-40°C to +85°C	Yellow/Green

Notes:


1. Alternate footprints, shielding, and LED colors available. Please contact the factory for additional information.
2. Part specific datasheets available upon request.

HALO 8P/8C Shielded Stacked and Ganged 2x6 RJ45



Mechanical (w/ LEDs)

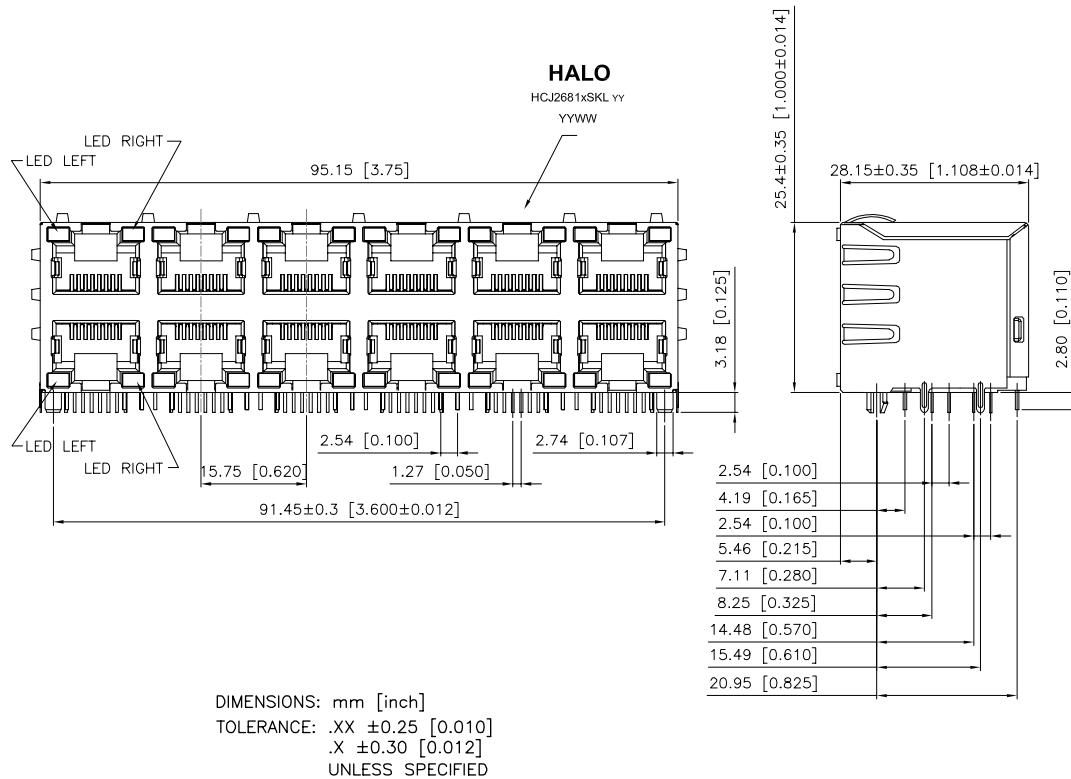


PCB Layout (w/ LEDs)

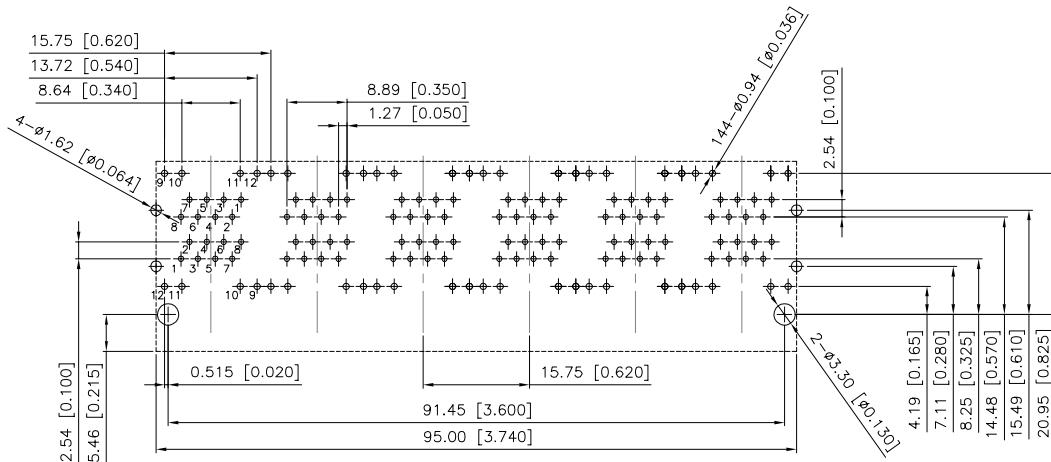

RECOMMENDED PCB LAYOUT (TOP VIEW)
DIMENSIONAL TOLERANCE: ±0.08 [0.003]



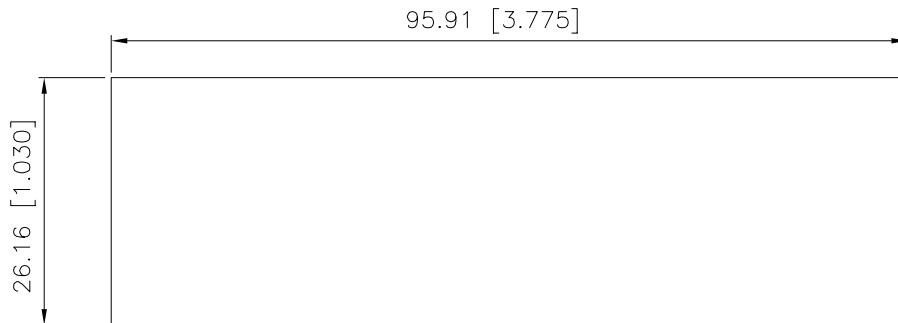

RECOMMENDED
PANEL CUTOUT DIMENSION



Santa Clara, CA 95054
(650) 903-3800
www.haloelectronics.com

HALO® Electronics is a leading supplier of high quality communication magnetics including signal transformers, filters, CMR chokes, PoE power transformers, DC/DC converters, and integrated Ethernet connectors. HALO's leading edge technology solutions are manufactured in ISO9001 and ISO14001 factories offering high quality products at a competitive price.