

DIGITAL FIBER SENSOR

FX-500 SERIES Ver.2

FX-550 SERIES

FX-550L SERIES IO-Link Compatible, Self-Monitoring Type



At the industry's leading edge

FX-SERIES HIGH END MODEL

FX-501 / FX-502

Direct connection to open
network communication units

CC-Link IE Field


CC-Link

EtherCAT




Stability

Industry leading stability

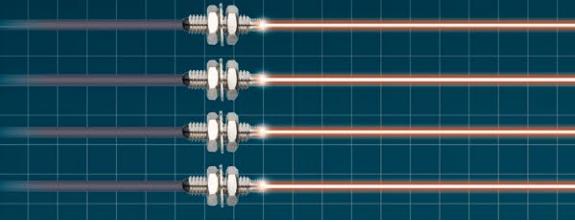

High stability!

We aim for absolute digitalization, focusing on the variation among fiber sensors. When the FX-500 series is used together with our super quality fiber, the incident light intensity variation among units is decreased to only 1/4 of that of conventional models. Changes in detection that could not be found in the past can now be monitored.

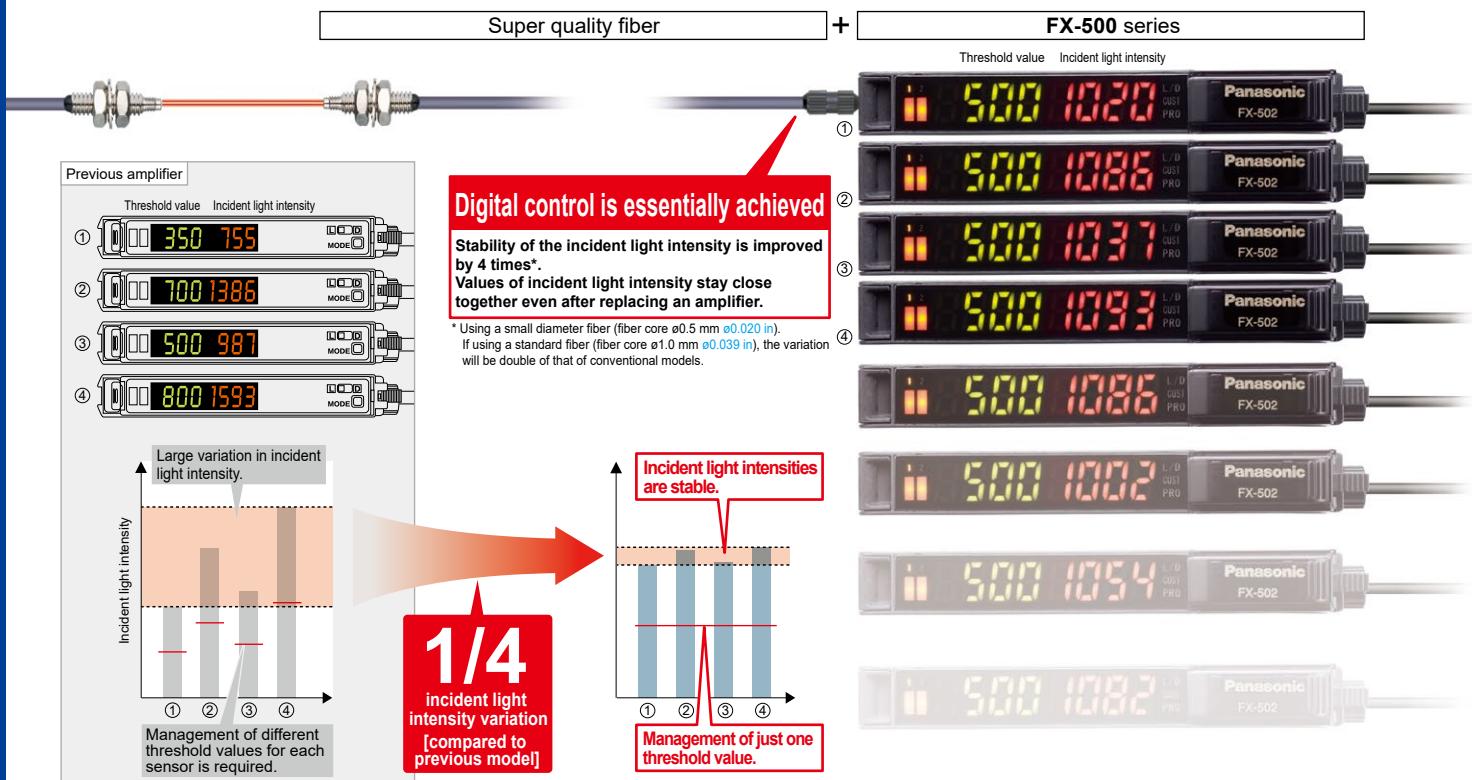

Just one threshold value for all sensors

If multiple fiber sensors are installed in the same operating conditions, the incident light intensities are nearly identical. With the new sensor version, one exact threshold value can be managed across all sensors.

Easy maintenance with stable fiber sensors


Because the incident light intensity is stable, the same threshold value can be used even when an amplifier is replaced. Also, the optical communication makes copying easier.

Confidence in beam adjustment

Stabilizing incident light intensity helps to raise installation precision and to make beam alignment fast and trouble-free.

Improved fiber coupling efficiency and suppressed variation among units

In each unit we have accurately aligned the central axis of the fiber with the central axis of the emitted light, which creates a high coupling efficiency that helps to reduce variation among units.

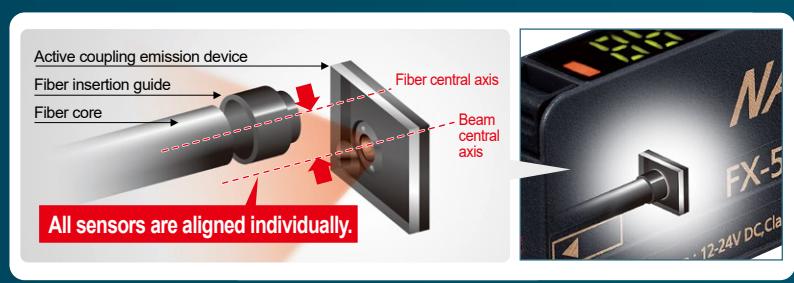

"Super quality fiber" with stable emission amount


"Stabilized incident light intensities" even in multiple units

A quality that surpassed that of standard fibers Introducing the super quality fiber



New fibers developed using a new manufacturing method adopted by our own factory along with a persistent quality control system

The basic performance of a standard fiber is greatly enhanced!

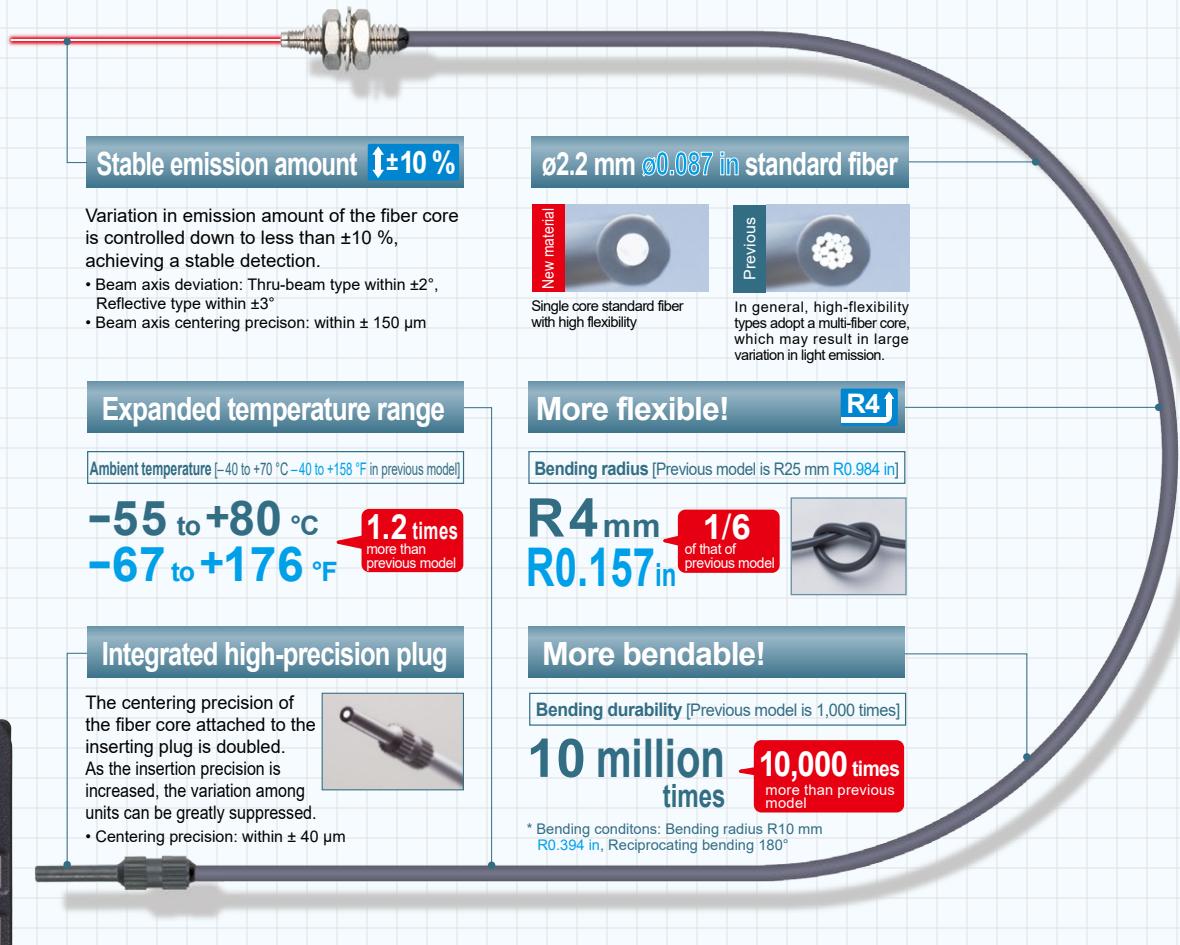

$\uparrow \pm 10\%$

Variation in emission intensity is down to less than $\pm 10\%$

Under our new manufacturing method and quality control system, we have developed fiber heads that have a stabilized light emission. When used with the FX-500 amplifier, a complete digital control is essentially achieved.

Super quality fiber reduces individual variation in optical transmission loss to less than $\pm 10\%$

Point 1

The beam axis deviation of each unit is kept within $\pm 2^\circ$ (thru-beam type) or $\pm 3^\circ$ (reflective type) and the beam axis centering precision is kept within $\pm 150\ \mu\text{m}$ $\pm 5.906\ \text{mil}$.

Point 2

High precision polishing is accomplished by using the PCTM polishing technique. The specularity of the end face of the fiber is 5 times greater.

Point 3

A high-precision integrated plug is achieved with the centering precision of the fiber core being $\pm 40\ \mu\text{m}$ $1.575\ \text{mil}$.

more than previous model
Approx. 2 times

The length of super quality fibers can be customized. Contact the sales office.

Speed & Distance


Industry leading sensing performance

High-speed response & Ultra long range detection

The exclusive detection IC combined with the high-intensity beam emitted from the active coupling emission device provides the capability of offering high-speed response time over a longer sensing range, opening up new possibilities for fiber sensor detection.

Max. 25 μ s response time

FX-500 with its high response time contributes to improve productivity.

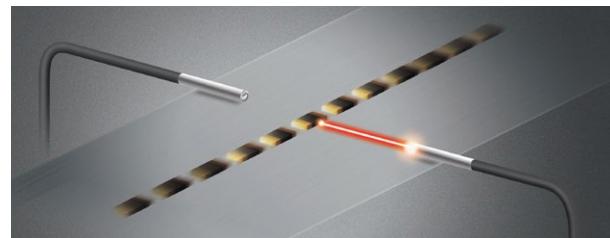


Performing minute object detection when using a small diameter fiber is now possible with a high response time and longer sensing range.

Hyper HYPR mode incorporated

FX-500 in combination with small diameter fibers which can handle challenging detections, allows long sensing range.

Max. 5.7 times!
longer than the previous model

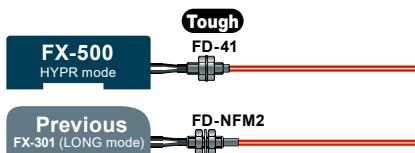

Note: When using FD-NFM2.

Detecting minute objects


Small diameter fibers can perform detection in long range and with stability even for minute objects.

High-speed mode

A high speed response time of 25 μ s, which is 2.6 times faster than the previous model, as well as a long sensing range are both achieved in high-speed mode.


The active coupling emission device efficiently focuses the beam through small diameter fibers

The super fine optical lens and emitting element are combined into one device enabling the beam emitted from the emitting element to be focused directly into the fiber. Coupling efficiency is therefore increased by 50 % compared to standard fiber (core $\varnothing 1$ mm $\varnothing 0.039$ in). In particular, the small diameter fibers (core $\varnothing 0.5$ mm $\varnothing 0.020$ in) see a dramatic increase in light intensity, making challenging detections possible.

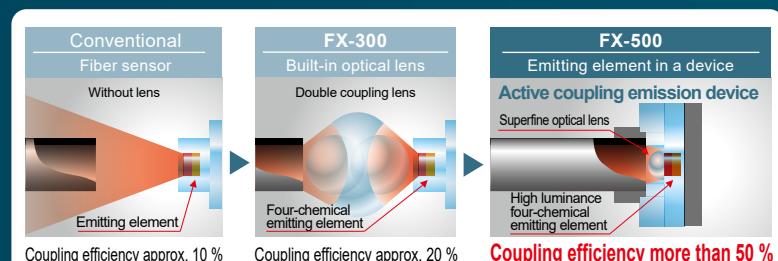

Coupling efficiency = (light intensity directed into the fiber / emission intensity of active coupling emission device) $\times 100$

* Image

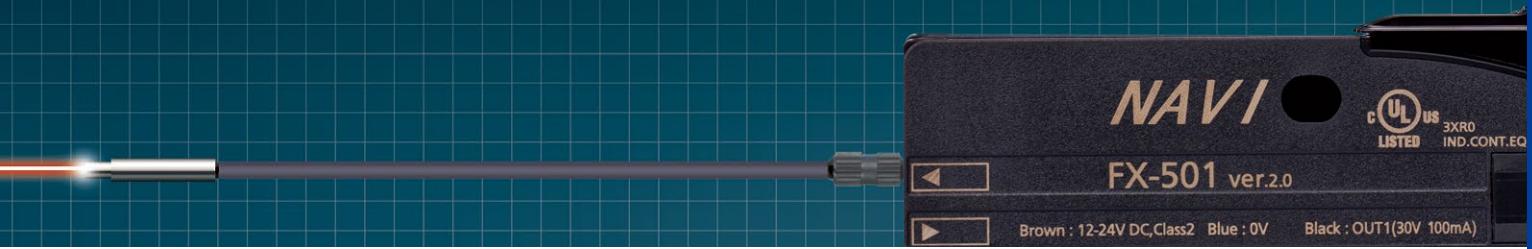

Sharp detection with suppressed hysteresis

So accurate!


The FX-500 with its accurate detection catches fractional differences in light intensity, achieving high precision and solving low-hysteresis applications.

H-02 mode


Long range detection of small objects with small difference in light intensity

The FX-500 series achieves a long sensing range by its high intensity beam in addition to suppressed hysteresis. Detection of minute objects over a long range is now more accurate than before.

Comparison image

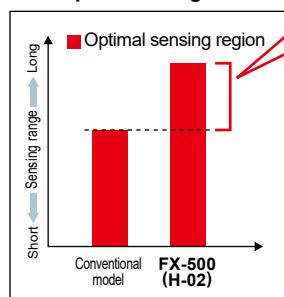


The light intensity difference caused by one sheet of glass can be detected from a more distant point.

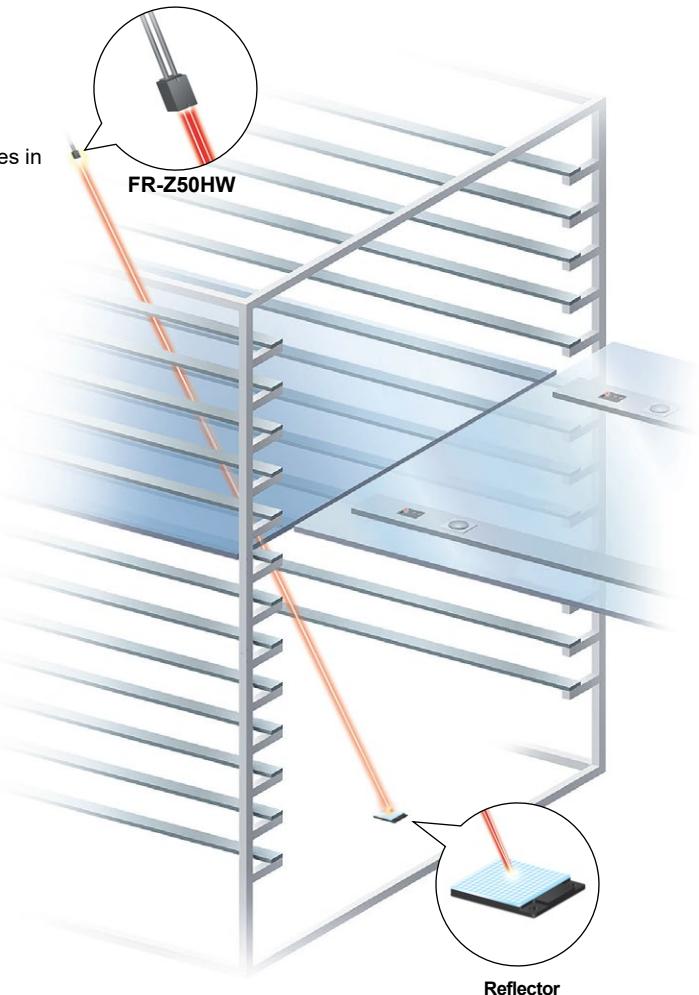


H-01 mode

Highly accurate detection while avoiding saturation

Even the light is so strong that it causes saturation, the FX-500 series cuts down hysteresis to the utmost limit in order to produce the optimal margin for detection.

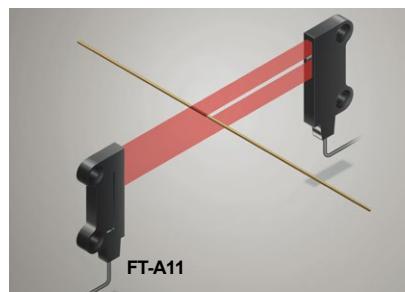


Comparison image

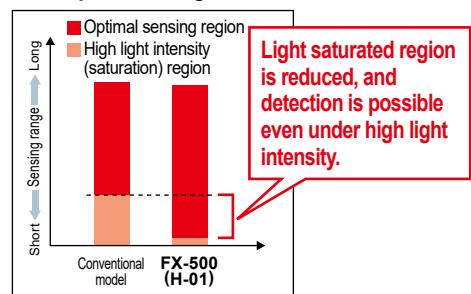


Three hysteresis modes

Hysteresis is the difference in incident light intensity at the points when the output turns ON and when the output turns OFF. Hysteresis was originally intended to be used as a measure against vibrations. Three hysteresis modes are available to support the wide variety of applications for which fiber sensors are optimally suited.



Mode table

Mode	Hysteresis amount	Light intensity	Description
H-01	Minimal	Small	Sharp detection with high accuracy is possible in this mode. Optimal for minute object detection where light saturates easily.
H-02	Small	Large	Initial setting mode. Accurate detection such as long range detection of a large glass substrate is possible.
H-03	Large	Large	A mode used for prevention of chattering. Works in adverse environments such as vibration or dirt.

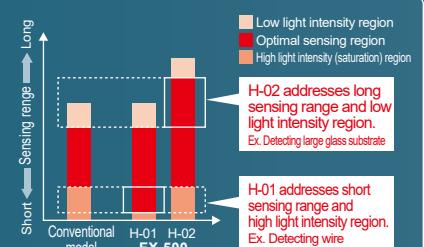

Class leading form and operability

New form!

Flat display with wide viewing angle

The large and high-contrast 7-segment display of high luminance provides clear visibility from a wide angle of view.



Compact cover does not get in the way

Reduced to **1/3** of the previous model's size



Streamlined fiber clamp

Conventionally clamp operation was performed after opening up the cover. The FX-500 series adopts a guard structure eliminating the cover so that the clamp operation can be done in one step.

MODE NAVI + Direct setting

MODE NAVI uses three indicators and a dual display to show the amplifier's basic operations. The current operation mode can be confirmed at a glance, so even a first-time user can easily operate the amplifier.

Streamlined fiber clamp

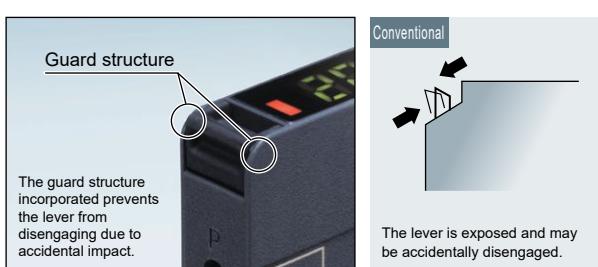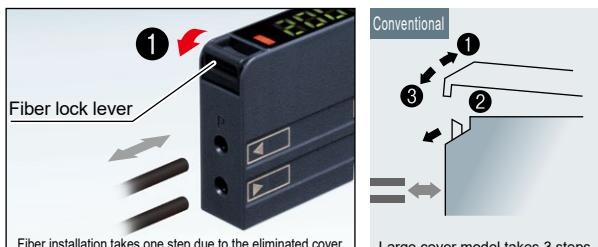

NAVI display (lights off during RUN mode)

L/D

Switches output operation.
L: Light-ON D: Dark-ON


CUST

Allows direct setting change selectable from response time / hysteresis / emitting power / emission.
(Initial setting: response time)

PRO

Allows the selection of advanced functions such as timer, copy, and memory functions.

Direct setting

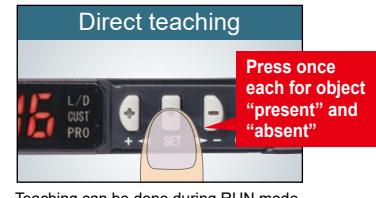

A variety of functions at the industry's leading edge

Stable detection while being eco-friendly


Emission power & gain setting



In cases when the incident light intensity is saturated, the light emitting amount can be adjusted to the optimal level by AUTO without changing the response time. This allows stable detection with an optimal S/N ratio and saves energy by controlling the emitting electric current.

Auto mode (AUTO) and 3-level manual mode (H / M / L [fine-adjustable]) are incorporated.

Detecting a transparent sheet

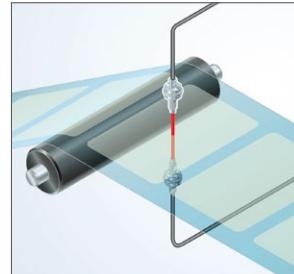


Built-in logic functions

No PLC necessary. Logical calculation with fiber sensor only


Logical calculation functions

Three logical calculations (AND, OR, XOR) are available with fiber sensor only.

3 logical operation can be selected against Output 1. Additional controller is not required so both wire-saving and cost reduction can be achieved.

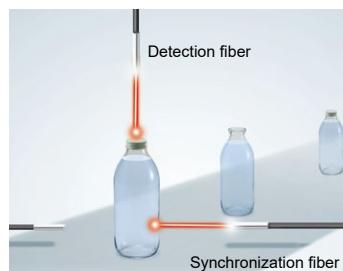


Calculation of two neighboring amplifiers

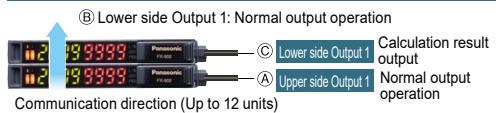

Calculation of two outputs in one amplifier FX-502(P) / FX-505(P)-C2



Calculation of one amplifier and external input FX-502(P) / FX-505(P)-C2

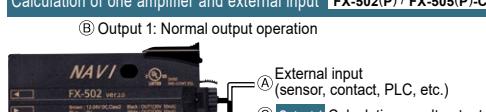



Truth table

A	B	Logical calculation output (C)		
		AND	OR	XOR
ON	ON	ON	ON	OFF
OFF	ON	OFF	ON	ON
ON	OFF	OFF	ON	ON
OFF	OFF	OFF	OFF	OFF

Saves maintenance time


Threshold tracking function

This function performs automatic setting of threshold value by checking the incident light intensity at desired intervals in order to follow the changes in the light amount resulting from changes in the environment over long periods (such as dust). This contributes to reduction in maintenance hours.

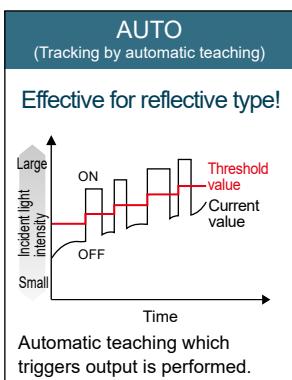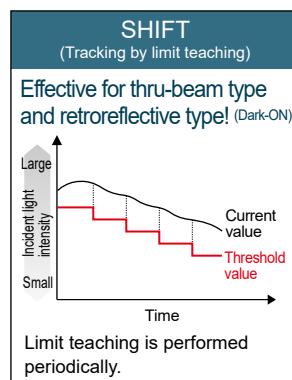

Selectable interference prevention

In addition to the automatic interference prevention function which is enabled through the optical communication of amplifiers mounted in cascade, an alternate frequency interference prevention function is also incorporated. So even for layouts where optical communication cannot be carried out, switching of emission frequencies allows interference prevention.

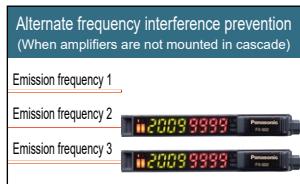


* Refer to specifications for details of number of sensors allowed in interference prevention.

A variety of functions at the industry's leading edge

Resolves variation in displayed incident light intensity Display adjustment setting


The variation in display can be adjusted to random values. This helps to define proper instruction in a work order.

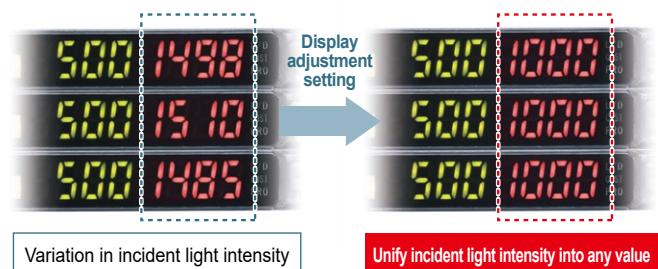

Stable detection over long and short periods Stabilized emission amount

The "four-chemical emitting element", which we were the first to incorporate to maintain a stable level of light emission, has now become an industry standard.

FX-500 series continues to adopt the same emitting element as well as the "APC (Auto Power Control) circuit" which improves stability in short periods such as when the power is turned on.

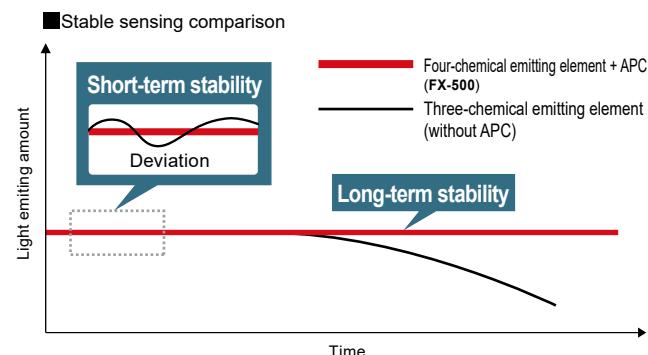


Suitable for preventative maintenance Self-diagnosis output

FX-502(P) / FX-505(P)-C2

FX-502(P) / FX-505(P)-C2 can set Output 2 as a self-diagnosis output. When the teaching of Output 1's threshold value is carried out, Output 2 is set concurrently with the setting randomly shifted by the amount of surplus of threshold value. Light intensity deterioration due to fiber breakage or dust accumulation can be notified as an alarm output.





Self-diagnosis can be used with the threshold tracking function for added effectiveness.

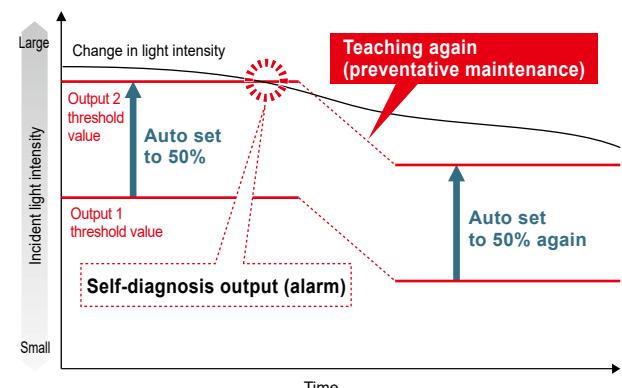

Analog output cable type

FX-505(P)-C2

To monitor the sensing of objects, a 4 to 20 mA analog current is output in respond to the digital value of the incident light intensity.

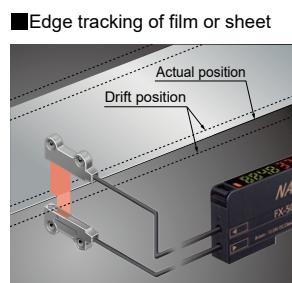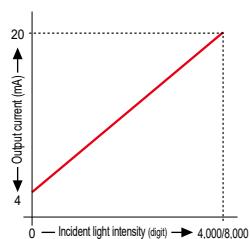

The drifting path can be monitored as the light intensity changes.

8 data banks Smooth setup changes

The number of data banks used for saving the setup conditions of the amplifier is increased to eight. Setup conditions can be saved and loaded to make setup changes easy at a worksite where multiple models are manufactured.

External input

Remote control improves work efficiency

FX-502(P) / FX-505(P)-C2

Work efficiency can be improved by operating via PLC output or other external signal.

(FX-502(P) can operate via external signal when switching from Output 2 to external input.)

Functions operable by external input


Full-auto* / Limit* / 2-point teaching*	Display adjustment setting*
Data bank load* / save*	Logical calculation (self-unit only)
Emission halt	Copying function lock (self-unit only)

* FX-505(P)-C2 conducts the answer back output toward external input, when setting Sensing output 2 to the answer back output mode.




Equipped with 5 timer types

A wide variety of timer control operations can be carried out by fiber sensors only.

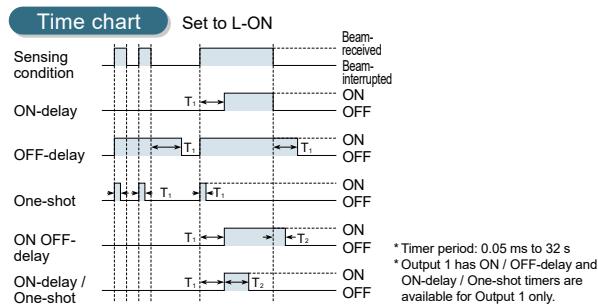


No need to specify a main unit or sub unit

All FX-500 amplifiers can be used as either a main unit or a sub unit. Just use a main cable or a sub cable to distinguish the two. This reduces the costs of inventory management.

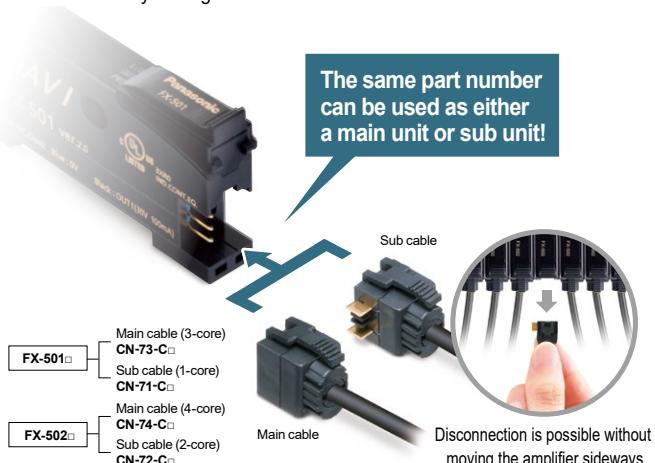

Network communication

Connection to CC-Link IE Field / CC-Link / EtherCAT open network is possible through the communication unit for open network, SC-GU3 series. Monitoring or setting changes can be carried out via a PLC, PC, etc.

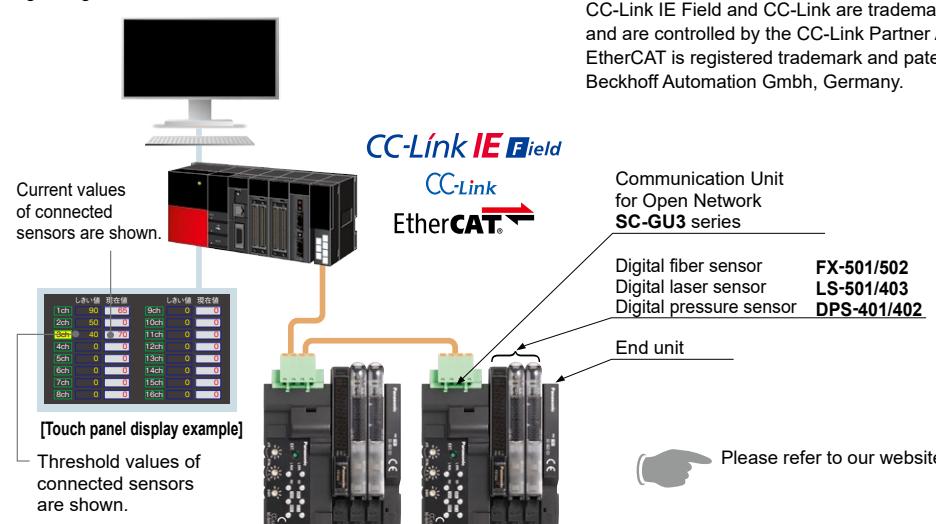

An optical communication function allows sensors to be adjusted simultaneously


The data that is currently set can be copied and saved all at once for all amplifiers connected together from the right side thanks to the optical communication function.

This greatly reduces troublesome setup tasks and makes setup much smoother.



Wire-saving, space-saving

The quick-connection cables enable reduction in wiring. The connections and man-hours required for the relay terminal block setup can be reduced and valuable space is saved.

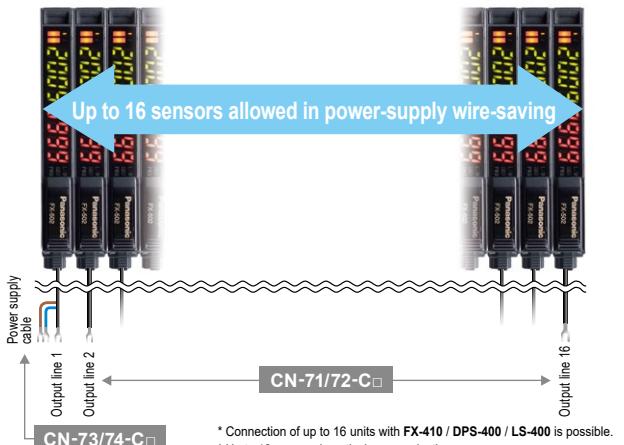

1.6 times longer sensing range than conventional models

Significantly improved stability and usability



Sensing range
1.6 times longer than conventional models

Entry model

Sensing range up to 1.6 times


Ample sensing distance even with thin fiber

The sensing range of the thin reflective type fiber is about 1.6 times longer than that of a conventional product (the sensing range of the standard reflective type fiber is about 1.4 times longer). This adds extra flexibility to the sensor layout.

Fiber	Sensing range (STD mode)		Rate of increase in sensing range
	FX-551	FX-501	
FT-31	480 mm 18.89 in	315 mm 12.402 in	152 %
FT-42	1,470 mm 57.874 in	1,130 mm 44.488 in	130 %
FD-41	200 mm 7.874 in	125 mm 4.921 in	160 %
FD-61	620 mm 24.409 in	450 mm 17.717 in	138 %




When the hysteresis is the same, the higher incident light intensity results in more stable detection.

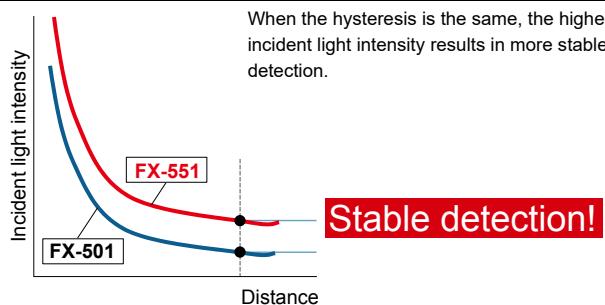

Easy adjustment of beam axis

Thanks to the high emission power, a slight deviation of beam axis causes no problem.

It is ideal for use in dusty areas* or for detection through an extremely small slit.

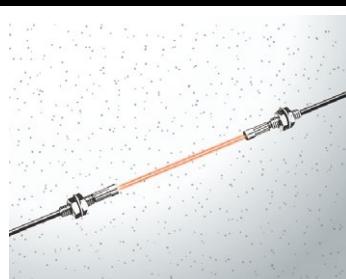

* Need to confirm proper operation in installed condition.

Equipped with a mode to minimize the effect of ambient light

When setting to activate the environment resistance mode in the emission frequency setting, the ambient illuminance for LED lights becomes about 2.5 times higher than that in the normal mode. This reduces erroneous detections caused by LED lights.






Simplified functions for improved operation ease

The FX-500 series and newer models are equipped with only basic functions for improved ease of use. No matter which model you select, they are all easy to use.


MODE NAVI + Direct setting

MODE NAVI uses three indicators and a dual display to show the amplifier's basic operations. The current operation mode can be confirmed at a glance, so even a first-time user can easily operate the amplifier.

■ NAVI display (lights off during RUN mode)

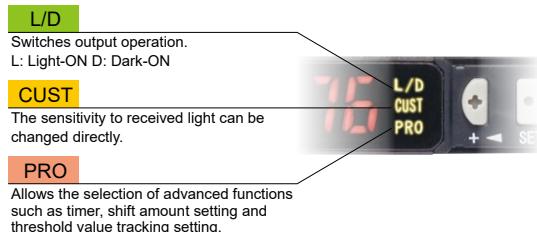

■ Direct setting

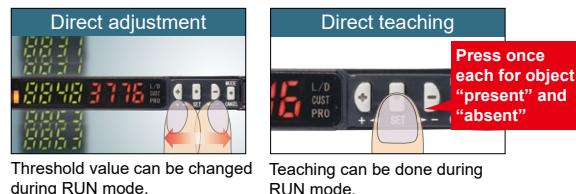


► List of functions in PRO mode

PRO 1	Response time setting, timer setting, shift amount setting
PRO 2	Teaching lock setting, digital display item setting, digital display turning setting, Eco setting
PRO 3	Display adjustment setting, reset setting, emission frequency setting, threshold value tracking setting


No need to specify a main unit or sub unit

All FX-500 amplifiers can be used as either a main unit or a sub unit. Just use a main cable or a sub cable to distinguish the two. This reduces the costs of inventory management.

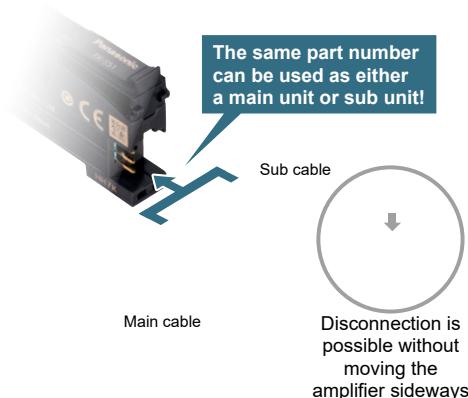

Wire-saving, space-saving

The quick-connection cables enable reduction in wiring. The connections and man-hours required for the relay terminal block setup can be reduced and valuable space is saved.

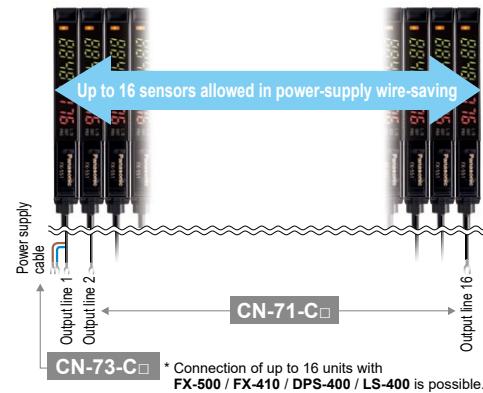

Reduction of the data analysis burden - one small step towards IoT.

IO-Link Compatible, Self-Monitoring Type **Self-Monitoring Sensor**

IO-Link compatible

Collecting sensor level data

Field data collected and accumulated for "preventive maintenance" and "operation monitoring".

An analysis of such field data requires high-level know-how and time, causing a burden to people responsible for the production site management.

The **Self-Monitoring Sensor** manufactured by Panasonic Industry is capable of reporting sensor data and its own state to the host device through the I/O Link master.


With the Self-Monitoring Sensor, you can immediately judge the state of the sensor and easily identify the cause of failure.

Thus, this sensor contributes to the **reduction of the burden experienced by the client in collecting and analyzing data**.

What is "IO-Link"?

IO-Link

IO-Link is an open communication technology according to IEC 61131-9 for the 1:1 bidirectional communication between the IO-Link device (sensor or actuator) and the IO-Link master.

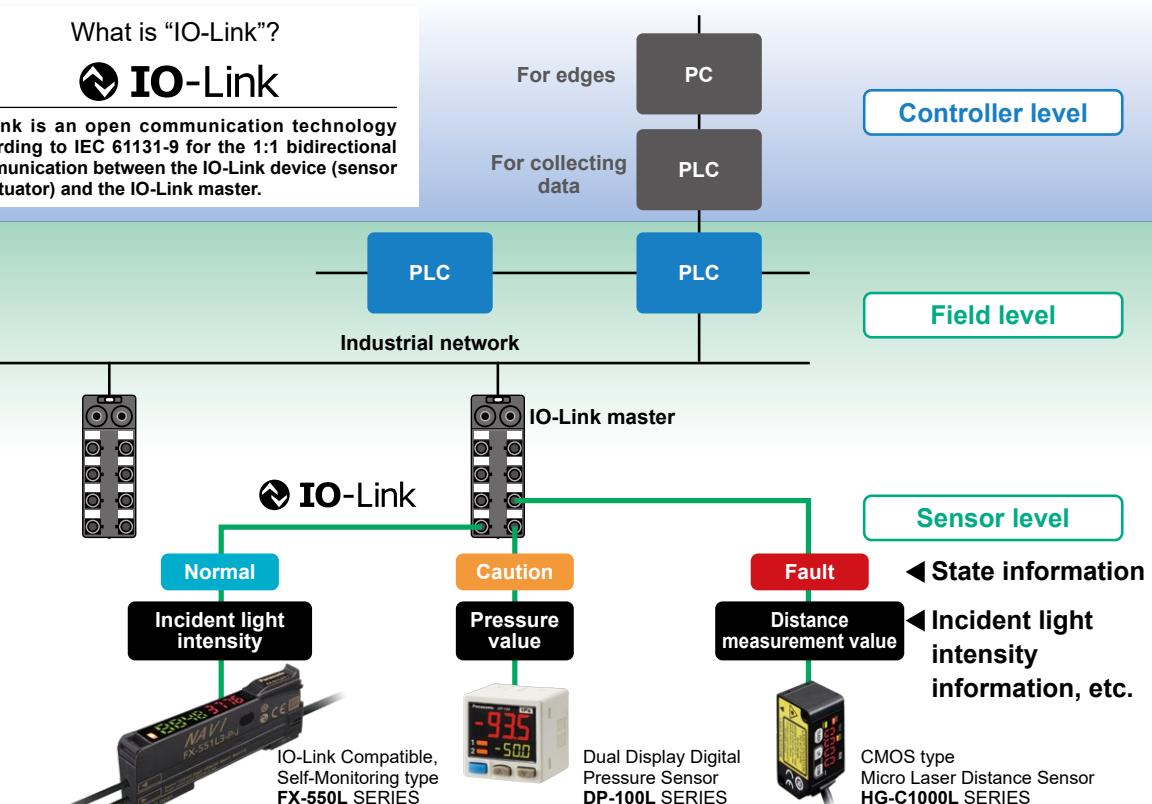


With the Panasonic Industry's Self-Monitoring Sensor, you can leave the sensor to diagnose its own state!

Examples of IoT in the industrial automation field

Before the introduction of Self-Monitoring Sensors

Preventive maintenance

- We want to avoid production line stoppage that might occur due to unexpected sensor failure.
- $\text{Line stoppage hours} \times (\text{manufacturing unit cost} / \text{hour}) = \text{Loss}$
- We want to minimize the production line down time to almost zero.

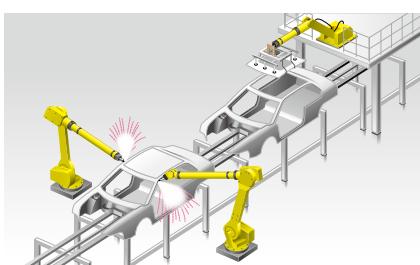

After the introduction of Self-Monitoring Sensors

From preventive maintenance to predictive maintenance

Leave the sensor diagnosis to the sensor itself.

- All you need to do is to monitor the sensor state.
- PLC can be used exclusively for controlling devices.
- Possible to check detail information at a desired timing.

Leave the resetting for replaced sensors to the higher-level master

- Automatically written from the connected master.
- Possible not only to save time but also to prevent human errors.

Problems


- The amount of data to be collected is large and this may lower the PLC processing capacity.
- The burden of data analysis is large.
- Resetting the replaced sensors is troublesome.



Self-monitoring function

With the Panasonic Industry's Self-Monitoring Sensor, you can get high-level solutions!

The introduction of IoT requires collection of the incident light intensity data and presents the following problems.

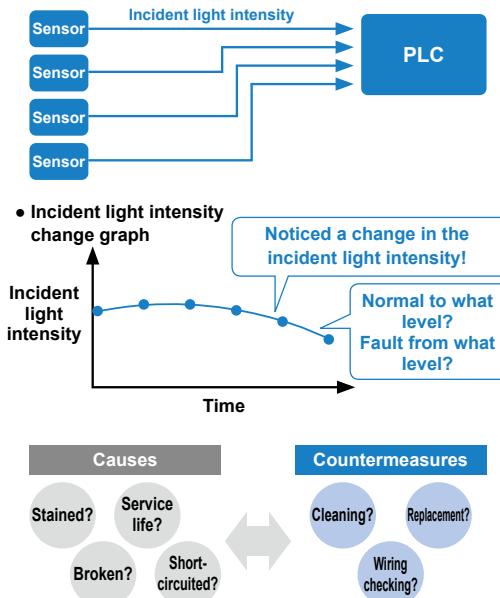

Previously only ON/OFF data was required. But, due to an addition of the incident light intensity data, the PLC processing burden has increased.

We noticed a change in the incident light intensity. However, because there is no judgment criteria, we cannot tell whether the incident light status is normal or not.


Unless we identify the cause of changes in the incident light intensity, we cannot optimize countermeasures targeting the sensors.

Problems are solved by the high-level self-diagnosis.

Status	Judgement of the state	
Normal	Operation is normal.	
Notification	Check the settings. Detected state is faulty.	* Recover to the normal state through checking installation and settings. Reduction in the incident light intensity
Caution	Getting close to the end of service life. Reached the state where the device should be replaced.	* Limitation in the writing frequency into the memory or in the operation hours, etc.
Fault	Short-circuited or broken. Reached the state where it is impossible to control as a device.	* Short-circuited output, damaged EEPROM, etc.

* By creating a program with a PLC, etc., the "State" of the self-monitoring sensor can be grasped.

Easy use of IoT

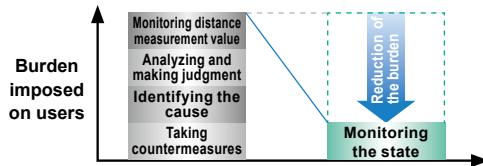

"Predictive maintenance" can be easily achieved through monitoring the state of the Self-Monitoring Sensor.

■ ORDER GUIDE

Amplifiers

Quick-connection cable is not supplied with the amplifier. Please order it separately.

Type	Appearance	Model No.	Emitting element	Output	External input
FX-500 series	Standard type 2-output type		FX-501	Red LED	NPN open-collector transistor
			FX-501P		PNP open-collector transistor
			FX-502		NPN open-collector transistor 2 outputs
	Cable type		FX-502P		PNP open-collector transistor 2 outputs
			FX-505-C2		NPN open-collector transistor 2 outputs, analog output
FX-550 series	Connector type		FX-551	Red LED	NPN open-collector transistor
			FX-551P		PNP open-collector transistor
	Cable type		FX-551-C2		NPN open-collector transistor
			FX-551P-C2		PNP open-collector transistor
FX-550L series (IO-Link compatible)	Discrete wire type		FX-551L3-P-C2	Red LED	PNP open-collector transistor
	M12 connector type		FX-551L3-P-J		

Supports Smartclick (Note)

Note: Smartclick is a trademark or registered trademark of OMRON Corporation.

■ ORDER GUIDE

Quick-connection cables


For FX-501(P) / FX-551(P)

Quick-connection cable is not supplied with the amplifier. Please order it separately.

Type	Model No.	Description
Main cable (3-core)	CN-73-C1	Length: 1 m 3.281 ft 0.2 mm ² 3-core cabtyre cable, with connector on one end
	CN-73-C2	Length: 2 m 6.562 ft Cable outer diameter: ø3.3 mm ø0.130 in
	CN-73-C5	Length: 5 m 16.404 ft
Sub cable (1-core)	CN-71-C1	Length: 1 m 3.281 ft 0.2 mm ² 1-core cabtyre cable, with connector on one end
	CN-71-C2	Length: 2 m 6.562 ft Cable outer diameter: ø3.3 mm ø0.130 in
	CN-71-C5	Length: 5 m 16.404 ft Connectable to a main cable up to 15 cables.


Main cable

- **CN-73-C**



Sub cable

- **CN-71-C**




For FX-502(P)

Quick-connection cable is not supplied with the amplifier. Please order it separately.

Type	Model No.	Description
Main cable (4-core)	CN-74-C1	Length: 1 m 3.281 ft 0.2 mm ² 4-core cabtyre cable, with connector on one end
	CN-74-C2	Length: 2 m 6.562 ft Cable outer diameter: ø3.3 mm ø0.130 in
	CN-74-C5	Length: 5 m 16.404 ft
Sub cable (2-core)	CN-72-C1	Length: 1 m 3.281 ft 0.2 mm ² 2-core cabtyre cable, with connector on one end
	CN-72-C2	Length: 2 m 6.562 ft Cable outer diameter: ø3.3 mm ø0.130 in
	CN-72-C5	Length: 5 m 16.404 ft Connectable to a main cable up to 15 cables.


Main cable

- **CN-74-C**



Sub cable

- **CN-72-C**



End plates

End plates are not supplied with the amplifier. Please order them separately when the amplifiers are mounted in cascade.


Appearance	Model No.	Description
	MS-DIN-E	When amplifiers are mounted in cascade, or when an amplifier moves depending on the way it is installed on a DIN rail, these end plates clamp amplifiers into place on both sides. Make sure to use end plates when cascading multiple amplifiers together. Two pcs. per set

■ OPTIONS

Designation	Model No.	Description
Amplifier mounting bracket	MS-DIN-2	Mounting bracket for amplifier

Amplifier mounting bracket


- **MS-DIN-2**



Amplifier protection seal

- **FX-MB1**

10 sets of 2 communication window seals and 1 connector seal

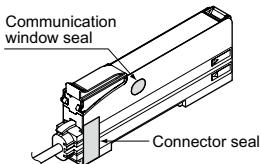

Recommended extension cables for M12 connector type

Manufactured by OMRON Corporation

Extension cable with connectors on both ends XS5W series 

* Smartclick is a trademark or registered trademark of OMRON Corporation. Contact the manufacturer for details of the recommended products.

■ OPTIONS

Communication unit for open network SC-GU3 series

For FX-501 / FX-502

Designation	Appearance	Model No.	Description
Communication unit for CC-Link IE Field		SC-GU3-04	This is a communication unit, which can convert the output signal of a sensor amplifier (NPN output type) into communication data for CC-Link IE Field.
Communication unit for CC-Link		SC-GU3-01	This is a communication unit, which can convert the output signal of a sensor amplifier (NPN output type) into communication data for CC-Link.
Communication unit for EtherCAT		SC-GU3-03	This is a communication unit, which can convert the output signal of a sensor amplifier (NPN output type) into communication data for EtherCAT.
End unit		SC-GU3-EU	<p>This end unit can change and check the settings of sensor amplifiers that allow optical communication and monitor operation status.</p> <p>* To obtain the output signal of the FX-502 output 2, optical communication must be performed using the end unit SC-GU3-EU.</p>
Cascading connector unit		SC-71	This one-touch connector is used to connect the following devices to SC-GU3-0□ : The FX-501/502/301/305 fiber sensor, the LS-501/403 laser sensor, the DPS-401/402 digital pressure sensor.

Note: Please refer to our website for details of communication unit for open network **SC-GU3** series.

SPECIFICATIONS

FX-500 series

Item	Model No.	Type	Standard type	2-output type	Cable type
		NPN output	FX-501	FX-502	FX-505-C2
Item		PNP output	FX-501P	FX-502P	FX-505P-C2
Applicable regulations and certifications		CE Marking (EMC Directive, RoHS Directive), UKCA Marking (EMC Regulations, RoHS Regulations), UL/c-UL Listing certification			
Supply voltage			12 to 24 V DC $^{+10\%}_{-15\%}$	Ripple P-P 10 % or less	
Power consumption		Normal operation: 960 mW or less (current consumption 40 mA or less at 24 V supply voltage, excluding analog output of cable type) ECO mode: 680 mW or less (current consumption 28 mA or less at 24 V supply voltage, excluding analog output of cable type)			
Output (2-output type and cable type: Output 1, Output 2)		<NPN output type> NPN open-collector transistor • Maximum sink current: 100 mA (2-output type and cable type are 50 mA) (Note 2) • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 2 V or less (Note 3) (at maximum sink current)	<PNP output type> PNP open-collector transistor • Maximum source current: 100 mA (2-output type and cable type are 50 mA) (Note 2) • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 2 V or less (Note 3) (at maximum source current)		
Output points		1 point		2 points	
Output operation			Switchable either Light-ON or Dark-ON by L/D mode		
Short-circuit protection			Incorporated		
Response time		H-SP: 25 μ s or less, FAST: 60 μ s or less, STD: 250 μ s or less, LONG: 2 ms or less, U-LG: 4 ms or less, HYPR: 24 ms or less, selectable			
Analog output (Cable type only)		Output current: 4 to 20 mA approx. [H-SP, FAST STD: At 0 to 4,000 digits, LONG: At 0 to 8,000 digits (Note 4)], Response time: 2 ms or less, Zero point: Within 4 mA $\pm 1\%$ F.S., Span: Within 16 mA $\pm 5\%$ F.S., Linearity: Within $\pm 3\%$ F.S., Load resistance: 0 to 250 Ω			
External input (2-output type only, switchable with Output 2)		—	<NPN output type> NPN non-contact input • Signal condition High: +8 V to +V DC or Open Low: 0 to +1.2 V DC (at 0.5 mA source current) • Input impedance: 10 k Ω approx.	<PNP output type> PNP non-contact input • Signal condition High: +4 V to +V DC (at 3 mA sink current) Low: 0 to +0.6 V DC or Open • Input impedance: 10 k Ω approx.	
Possible external input function		—	Emission halt / Teaching (Full-auto, Limit, 2-point) / Logic operation setting / Copy lock / Display adjustment / Data bank load / Data bank save, selectable		
Sensitivity setting			2-point teaching / Limit teaching / Full-auto teaching / Manual adjustment		
Incident light intensity display range			H-SP / FAST / STD: 0 to 4,000, LONG: 0 to 8,000, U-LG / HYPR: 0 to 9,999		
Timer function		Incorporated with variable OFF-delay / ON-delay / One-shot / ON OFF-delay / ON-delay • One-shot timer, switchable either effective or ineffective	<Output 1> Incorporated with variable OFF-delay / ON-delay / One-shot / ON OFF-delay / ON-delay • One-shot timer, switchable either effective or ineffective	<Output 2> Incorporated with variable OFF-delay / ON-delay / One-shot timer, switchable either effective or ineffective	
Timer period		Timer range "ms": 0.5 ms approx., 1 to 9,999 ms approx., 1 ms approx., Timer range "sec.": 0.5 s approx., 1 to 32 s approx., 1 s approx., Timer range "1/10 ms": 0.05 ms approx., 0.1 to 999.9 ms approx., 0.1 ms approx., each output is set individually			
Light emitting amount selection function			Incorporated, 3 levels (each level 25 to 100 %) + Auto setting [1 level (25 to 100 %) when using H-SP mode]		
Interference prevention function			Incorporated (Note 5), selectable either automatic interference prevention or different frequency		
Various settings			Hysteresis setting / Shift amount setting / Emission power setting / Display turning setting / ECO setting / Data bank loading saving setting / Copying setting / Code setting / Reset setting / Logical calculation setting / Threshold tracking setting, etc.		
Protection			IP40 (IEC)		
Ambient temperature		-10 to +55 $^{\circ}\text{C}$ $^{+14\text{ to }+131\text{ }^{\circ}\text{F}}$ [If 4 to 7 units are mounted in cascade: -10 to +50 $^{\circ}\text{C}$ $^{+14\text{ to }+122\text{ }^{\circ}\text{F}}$ or if 8 to 16 units (cable type: 8 to 12 units) are mounted in cascade: -10 to +45 $^{\circ}\text{C}$ $^{+14\text{ to }+113\text{ }^{\circ}\text{F}}$] (No dew condensation or icing allowed), Storage: -20 to +70 $^{\circ}\text{C}$ $^{-4\text{ to }+158\text{ }^{\circ}\text{F}}$			
Vibration resistance		10 to 150 Hz frequency, 0.75 mm 0.030 in double amplitude (10 G max.) in X, Y and Z directions for two hours each			
Shock resistance		98 m/s ² acceleration (10 G approx.) in X, Y and Z directions five times each			
Emitting element (modulated)			Red LED (Peak emission wavelength: 643 nm 0.025 mil)		
Material			Enclosure, Case cover: Polycarbonate, Switch: Polycetal		
Cable		—	0.2 mm ² 6-core cabtyre cable, 2 m 6.562 ft long		
Cable extension		—	Extension up to total 100 m 328.084 ft is possible with 0.3 mm ² , or more, cable. (however, supply voltage 12 V DC)		
Weight		Net weight: 15 g approx., Gross weight: 70 g approx.	Net weight: 60 g approx., Gross weight: 100 g approx.		
Accessory			FX-MB1 (Amplifier protection seal): 1 set		

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 $^{\circ}\text{C}$ $^{+73.4\text{ }^{\circ}\text{F}}$.

2) 50 mA max. if 5 or more standard types are connected together. (25 mA in case of 2-output type and cable type)

3) In case of using the quick-connection cable (cable length 5 m 16.404 ft) (optional).

4) If display adjustment was conducted, it is not in this range.

5) Number of sensor heads which is possible to be mounted closely in auto interference prevention function depends on response time as shown in table below.

Number of sensor heads which is possible to be mounted closely in different frequency Interference prevention function is up to 3 units.

• Number of sensor heads mountable closely (Unit: set)

Response time	H-SP	FAST	STD	LONG	U-LG	HYPR
IP-1	0	2	4	8	8	12

SPECIFICATIONS

FX-550 series

Item	Type	Connector type	Cable type		
Model No.	NPN output	FX-551	FX-551-C2		
	PNP output	FX-551P	FX-551P-C2		
Applicable regulations		CE Marking (EMC Directive, RoHS Directive), UKCA Marking (EMC Regulations, RoHS Regulations)			
Supply voltage		12 to 24 V DC $^{+10}_{-15}$ % Ripple P-P 10 % or less			
Power consumption		Normal operation: 960 mW or less (current consumption 40 mA or less at 24 V supply voltage) ECO mode: 680 mW or less (current consumption 28 mA or less at 24 V supply voltage)			
Output	<NPN output type> NPN open-collector transistor • Maximum sink current: 100 mA • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 2 V or less (Note 2) (at maximum sink current)				
	<PNP output type> PNP open-collector transistor • Maximum source current: 100 mA • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 2 V or less (Note 2) (at maximum source current)				
Output operation	Switchable either Light-ON or Dark-ON by L/D mode				
Short-circuit protection	Incorporated				
Response time	FAST: 60 μ s or less, STD: 250 μ s or less, LONG: 2 ms or less, U-LG: 4 ms or less, HYPR: 24 ms or less, selectable				
Sensitivity setting	2-point teaching / Limit teaching / Full-auto teaching / Manual adjustment				
Incident light sensitivity setting	Incorporated, 4 steps				
Incident light intensity display range	FAST / STD: 0 to 4,000, LONG: 0 to 8,000, U-LG / HYPR: 0 to 9,999				
Timer function	Incorporated with variable OFF-delay / ON-delay / One-shot / switchable either effective or ineffective				
Timer period	Timer range "ms": 1 to 9,999 ms approx., 1 ms approx., Timer range "sec.": 1 to 32 s approx., 1 s approx., Timer range "1/10 ms": 0.1 to 999.9 ms approx., 0.1 ms approx. (Note 3)				
Different frequency interference prevention function (Note 4)	Incorporated (up to 4 units). Note that the response time varies depending on the setting. F-1: 0.8 ms or less, F-2: 0.9 ms or less, F-3: 1.0 ms or less, F-4: 1.7 ms or less				
Protection	IP40 (IEC)				
Ambient temperature	-10 to +55 °C +14 to +131 °F (If 4 to 7 units are mounted in cascade: -10 to +50 °C +14 to +122 °F or if 8 to 16 units are mounted in cascade: -10 to +45 °C +14 to +113 °F) (No dew condensation or icing allowed), Storage: -20 to +70 °C -4 to +158 °F				
Vibration resistance	10 to 150 Hz frequency, 0.75 mm 0.030 in double amplitude (10 G max.) in X, Y and Z directions for two hours each				
Shock resistance	98 m/s ² acceleration (10 G approx.) in X, Y and Z directions five times each				
Emitting element (modulated)	Red LED (Peak emission wavelength: 660 nm 0.026 mil)				
Material	Enclosure, Case cover: Polycarbonate, Switch: Polyacetal				
Cable	—		0.2 mm ² 3-core cabtyre cable, 2 m 6.562 ft long		
Cable extension	—		Extension up to total 100 m 328.084 ft is possible with 0.3 mm ² , or more, cable. (however, supply voltage 12 V DC or more)		
Weight	Net weight: 15 g approx., Gross weight: 55 g approx.		Net weight: 55 g approx., Gross weight: 90 g approx.		

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

2) In case of using the quick-connection cable (cable length 5 m **16.404 ft**) (optional).

3) When set to LONG, U-LG, HYPR, IP-F or IP-R, the time range cannot be set to 1/10 ms.

4) This function increases the hysteresis. Check the sensing condition when using the function.

SPECIFICATIONS

FX-550L series


Item	Type Model No.	Discrete wire type FX-551L3-P-C2	M12 connector type FX-551L3-P-J		
Applicable regulations	CE Marking (EMC Directive, RoHS Directive), UKCA Marking (EMC Regulations, RoHS Regulations)				
Supply voltage	12 to 24 V DC $\pm 10\%$ Ripple P-P 10% or less				
Power consumption	Normal operation: 960 mW or less (current consumption 40 mA or less at 24 V supply voltage) ECO mode: 720 mW or less (current consumption 30 mA or less at 24 V supply voltage)				
Communication output (C/Q) (Note 2)	IO-Link communication	IO-Link Specification V1.1			
	Baud rate	COM3 (230.4 kbps)			
	Process data	4 byte			
	Minimum cycle time	1.0 ms			
Control output (DO)	PNP open-collector transistor • Maximum source current: 50 mA • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 2 V or less (Note 3) (at maximum source current)				
Response time	Output operation	Switchable either Light-ON or Dark-ON by L/D mode			
	Short-circuit protection	Incorporated			
Sensitivity setting	2-point teaching / Limit teaching / Full-auto teaching / Manual adjustment				
Incident light sensitivity setting	Incorporated, 4 steps				
Incident light intensity display range	STD: 0 to 4,000, LONG: 0 to 8,000, U-LG / HYPR: 0 to 9,999				
Timer function	Incorporated with variable OFF-delay / ON-delay / One-shot, switchable either effective or ineffective				
Different frequency interference prevention function (Note 4)	Timer period	0.1 to 999.9 ms approx., in units of 0.1 ms approx.			
	Incorporated (up to 4 units). Note that the response time varies depending on the setting. F-1: 0.8 ms or less, F-2: 0.9 ms or less, F-3: 1.0 ms or less, F-4: 1.7 ms or less				
Protection	IP40 (IEC)				
Ambient temperature	-10 to +55 °C +14 to +131 °F (If 4 to 7 units are mounted in cascade: -10 to +50 °C +14 to +122 °F or if 8 to 16 units are mounted in cascade: -10 to +45 °C +14 to +113 °F) (No dew condensation or icing allowed), Storage: -20 to +70 °C -4 to +158 °F				
Vibration resistance	10 to 150 Hz frequency, 0.75 mm 0.030 in double amplitude (10 G max.) in X, Y and Z directions for two hours each				
Shock resistance	98 m/s ² acceleration (10 G approx.) in X, Y and Z directions five times each				
Emitting element (modulated)	Red LED (Peak emission wavelength: 660 nm 0.026 mil)				
Material	Enclosure, Case cover: Polycarbonate, Switch: Polycetal				
Cable	0.2 mm ² 4-core cabtyre cable, 2 m 6.562 ft long	0.2 mm ² cabtyre cable with M12 connector, 0.3 m 0.984 ft long			
Cable extension	Extension up to total 20 m 65.617 ft is possible with 0.3 mm ² , or more, cable. (Condition of CE compliance: less than 20 m 65.617 ft) (however, supply voltage 12 V DC or more)				
Weight	Net weight: 55 g approx., Gross weight: 80 g approx.	Net weight: 35 g approx., Gross weight: 60 g approx.			

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.
 2) When the sensor is used as an ordinary sensor, the communication output (C/Q) provides the same output operation as the control output (DO).
 3) In case of using the cable (cable length 2 m **6.562 ft**).
 4) This function increases the hysteresis. Check the sensing condition when using the function.

I/O CIRCUIT AND WIRING DIAGRAMS


FX-501 FX-551 FX-551-C2

I/O circuit diagram

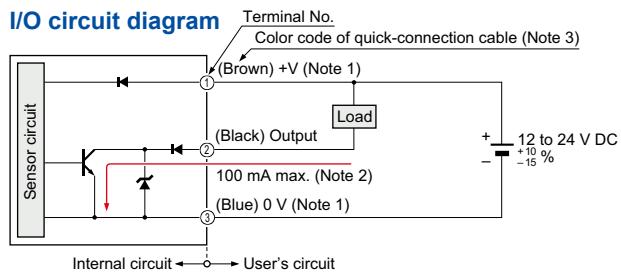


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
2) 50 mA max., if five amplifiers or more, are connected together.
3) The color of the lead wire of the FX-551-C2 is the same.

Wiring diagram

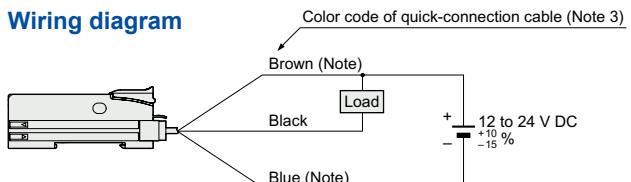

Note: The quick-connection sub cable does not have a brown and a blue lead wire.


Terminal arrangement diagram



PNP output type


FX-501P FX-551P FX-551P-C2

I/O circuit diagram

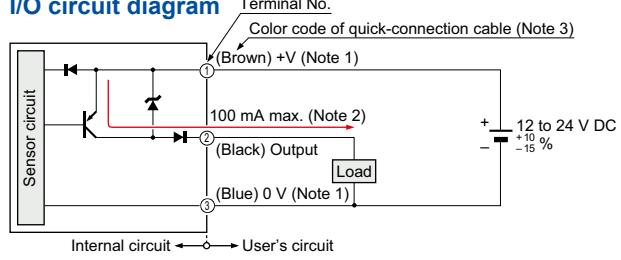


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
2) 50 mA max., if five amplifiers or more, are connected together.
3) The color of the lead wire of the FX-551P-C2 is the same.

Wiring diagram

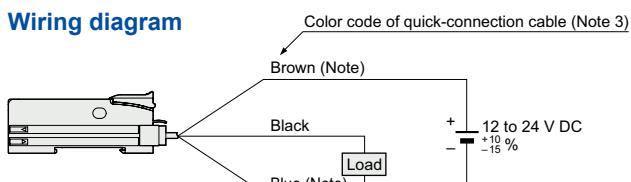

Note: The quick-connection sub cable does not have a brown and a blue lead wire.


Terminal arrangement diagram



NPN output type


FX-502

I/O circuit diagram

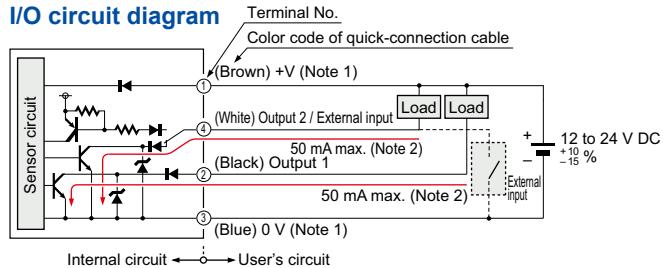


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
2) 25 mA max., if five amplifiers or more, are connected together.

Wiring diagram

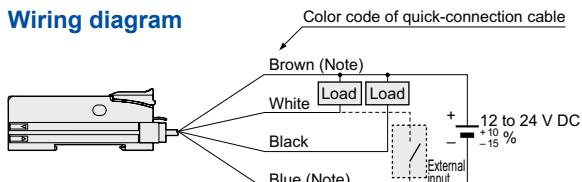

Note: The quick-connection sub cable does not have a brown and a blue lead wire.


Terminal arrangement diagram

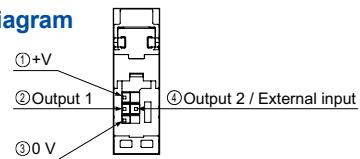

PNP output type


FX-502P

I/O circuit diagram

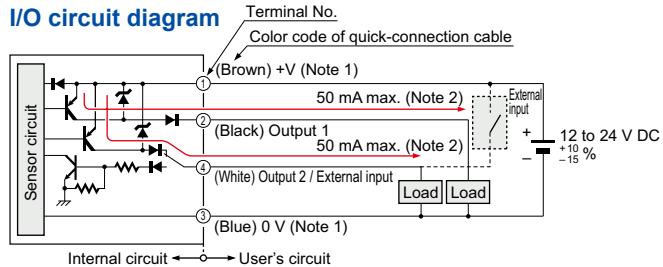


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
2) 25 mA max., if five amplifiers or more, are connected together.

Wiring diagram

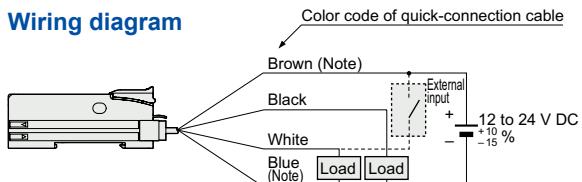

Note: The quick-connection sub cable does not have a brown and a blue lead wire.

Terminal arrangement diagram

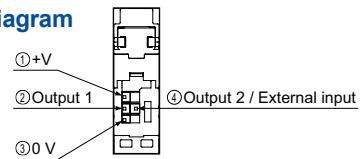


I/O CIRCUIT AND WIRING DIAGRAMS


FX-505-C2

NPN output type

I/O circuit diagram

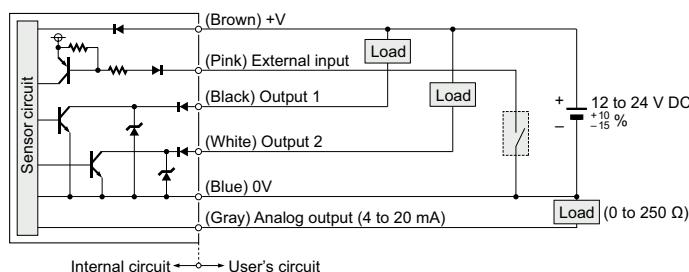


Wiring diagram

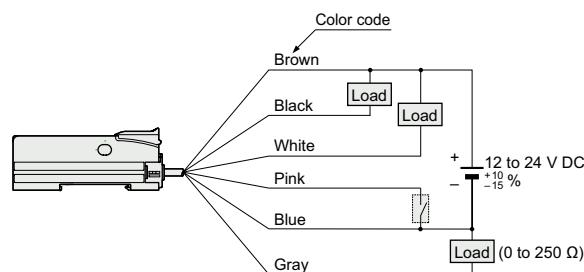


FX-505P-C2

PNP output type

I/O circuit diagram

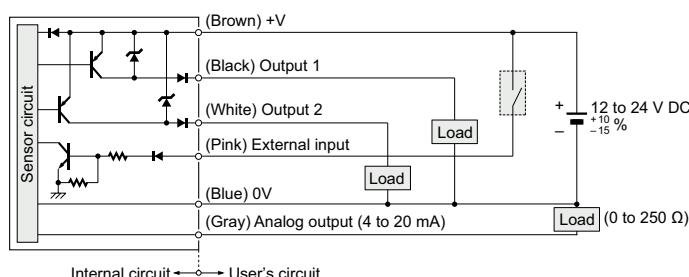

Wiring diagram

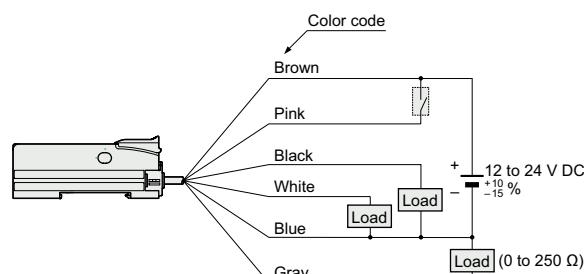


WIRING DIAGRAMS


FX-551L3-P-J

M12 connector type

<When using as an ordinary sensor>

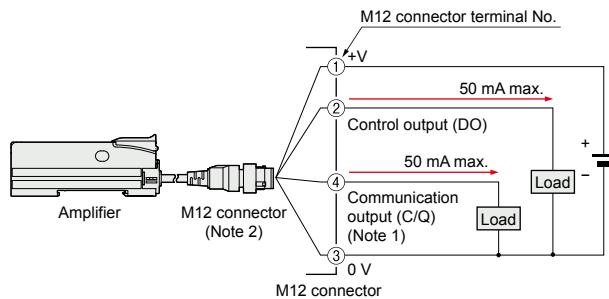


<When connecting to the IO-Link master>

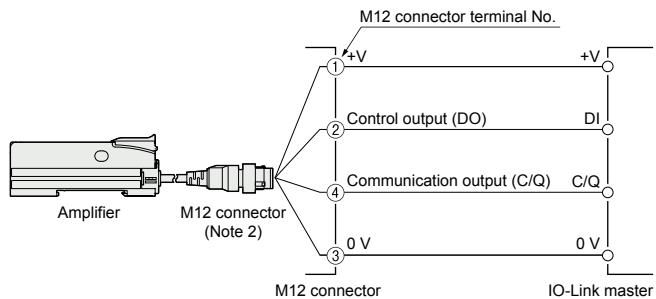

Notes: 1) When the sensor is used as an ordinary sensor, the communication output (C/Q) provides the same output operation as the control output (DO).
 2) When wiring with the discrete wire or extending the cable from the M12 connector, separately prepare commercially available M12 connector cable.

M12 connector terminal arrangement diagram

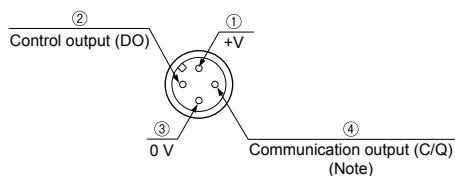

Terminal No.	Designation
①	+V
②	Control output (DO)
③	0 V
④	Communication output (C/Q) (Note)


Note: When the sensor is used as an ordinary sensor, the communication output (C/Q) provides the same output operation as the control output (DO).

WIRING DIAGRAMS

FX-551L3-P-C2


Discrete wire type

<When using as an ordinary sensor>

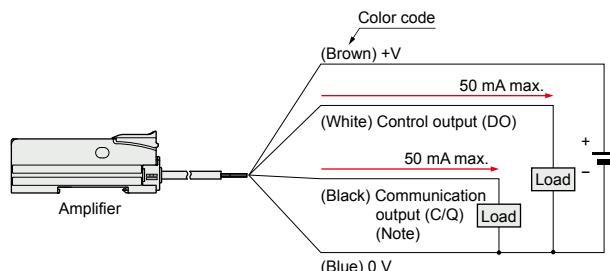

Note: When the sensor is used as an ordinary sensor, the communication output (C/Q) provides the same output operation as the control output (DO).

<When connecting to the IO-Link master>

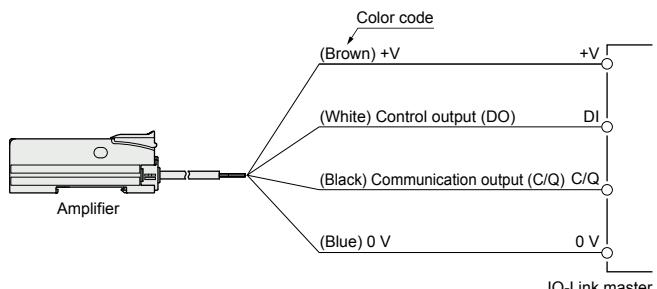

PRECAUTIONS FOR PROPER USE

Refer to the instruction manual for details.
The instruction manual data can be downloaded from our website.

- This catalog is a guide to select a suitable product. Be sure to read instruction manual of the product prior to its use.



- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.

Wiring

- Make sure that the power supply is OFF while adding or removing the amplifiers.
- Note that if a voltage exceeding the rated range is applied, or if an AC power supply is directly connected, the product may get burnt or damaged.
- Note that short-circuit of the load or wrong wiring may burn or damage the product.
- Do not run the wires together with high-voltage lines or power lines, or put them in the same raceway. This can cause malfunction due to induction.
- Verify that the supply voltage variation is within the rating.
- If power is supplied from a commercial switching regulator, ensure that the frame ground (F.G.) terminal of the power supply is connected to an actual ground.
- In case noise generating equipment (switching regulator, inverter motor, etc.) is used in the vicinity of this product, connect the frame ground (F.G.) terminal of the equipment to an actual ground.
- Make sure to use the quick-connection cable (optional) for FX-500/550 series. Extension up to total 100 m 328.084 ft is possible with 0.3 mm² or more, cable. However, in order to reduce noise, make the wiring as short as possible.

- When extending the cable length of FX-550L series, use a cable with a conductor cross-sectional area of 0.3 mm² or more. Note that the maximum allowed cable length is 20 m 65.617 ft (CE Marking condition: less than 20 m 65.617 ft). However, in order to reduce noise, make the wiring as short as possible.
- Make sure that stress by forcible bending or pulling is not applied to the sensor cable joint and fiber cable.

Others

- This product has been developed / produced for industrial use only.
- The specification may not be satisfied in a strong magnetic field.
- The ultra long distance (U-LG, HYPR) mode is more likely to be affected by extraneous noise since the sensitivity of that is higher than the other modes. Make sure to check the environment before use.
- Do not use during the initial transient time after the power supply is switched ON.

FX-500 series

H-SP, FAST, STD: 0.5 sec., LONG, U-LG, HYPR: 1 sec.

FX-550 series

FAST,STD: 0.5 sec., LONG, U-LG, HYPR: 1 sec.


FX-550L series

STD: 0.5 sec., LONG, U-LG, HYPR: 1 sec.

- These sensors are only for indoor use.
- Avoid dust, dirt, and steam.
- Make sure that the product does not come in contact with oil, grease, organic solvents such as thinner, etc., strong acid or alkaline.
- This product cannot be used in an environment containing inflammable or explosive gases.
- Never disassemble or modify this product.
- This product adopts EEPROM. Settings cannot be done a million times or more because of the EEPROM's lifetime.

Refer to our website for fiber dimensions.
The CAD data can be downloaded from our website.


DIMENSIONS (Unit: mm in)

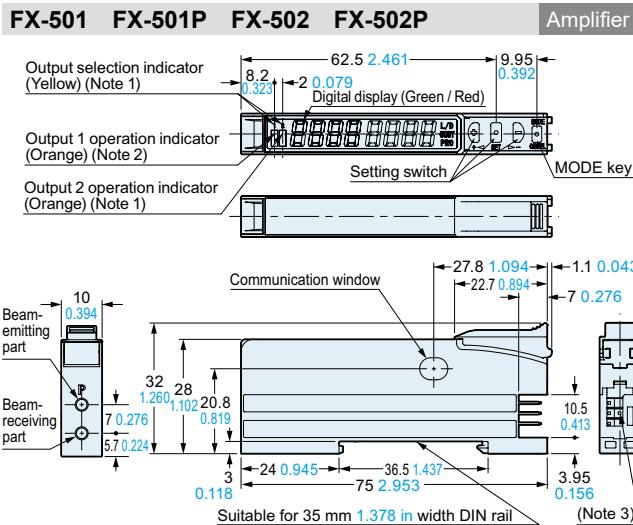

Notes: 1) FX-502(P) only


2) FX-501(P): Operation indicator

3) FX-501(P): 3-pin, FX-502(P): 4-pin

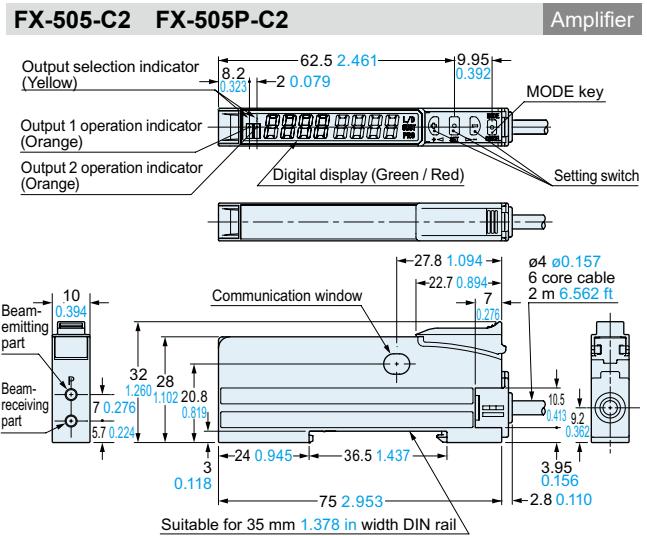


FX-551 FX-551P

Amplifier

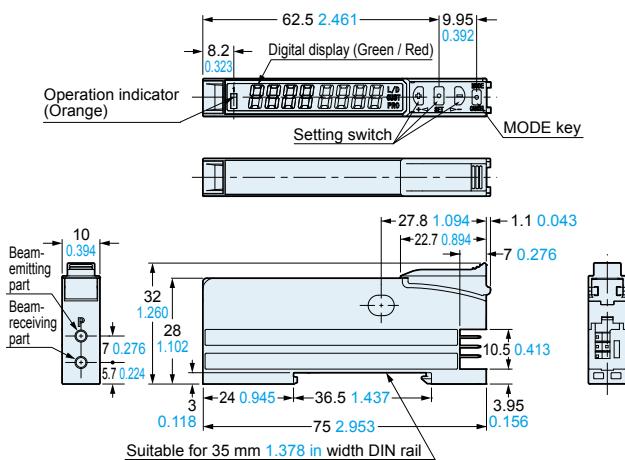


FX-551-C2 FX-551P-C2

Amplifier

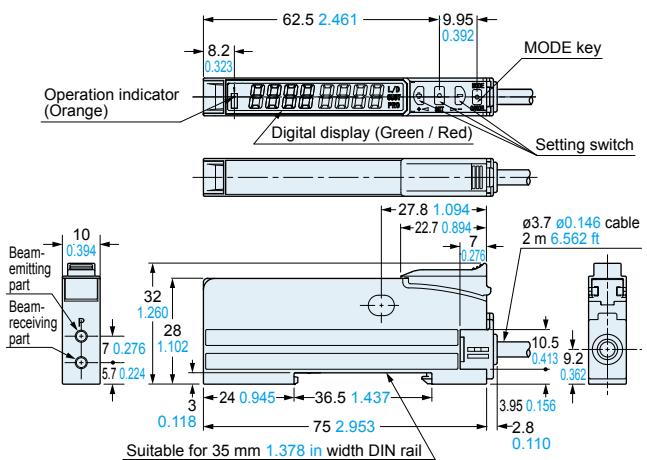


FX-551L3-P-C2

Amplifier

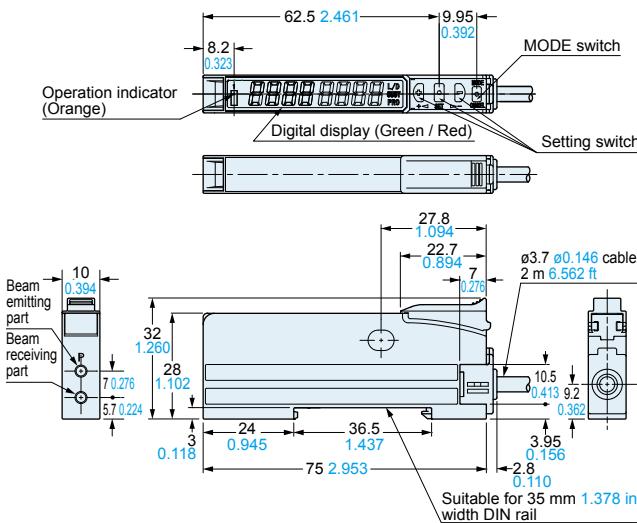

FX-551L3-P-J


Amplifier

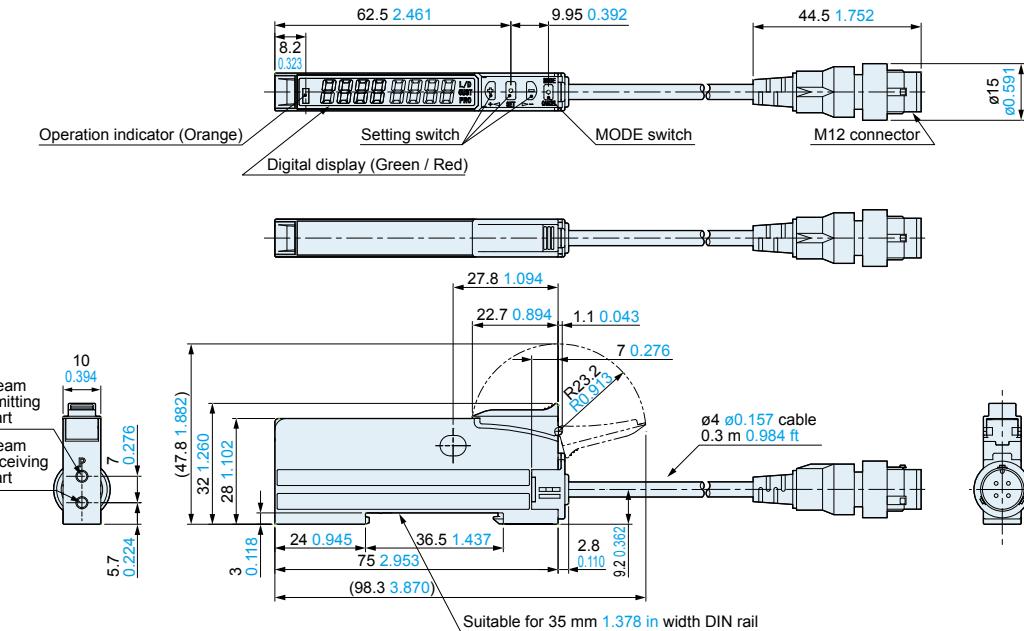

CN-73-C□ CN-74-C□

- Length L

Model No.	Length L
CN-73/74-C1	1,000 39.370
CN-73/74-C2	2,000 78.740
CN-73/74-C5	5,000 196.850

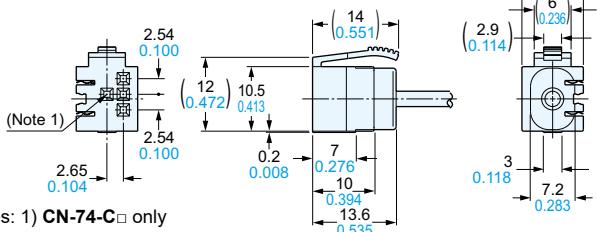


Notes: 1) **CN-74-C**□ only
2) **CN-73-C**□: 3-core

Main cable (Optional)

CN-71-C□ CN-72-C□

- Length L


Model No.	Length L
CN-71/72-C1	1,000 39.370
CN-71/72-C2	2,000 78.740
CN-71/72-C5	5,000 196.850

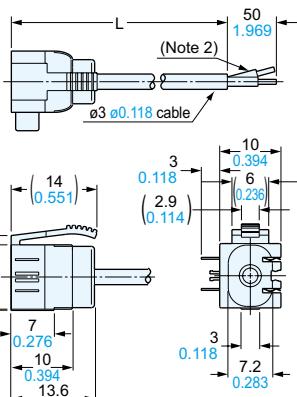

Notes: 1) **CN-72-C**□ only
2) **CN-71-C**□: 1-core


MS-DIN-2

Amplifier mounting bracket (Optional)

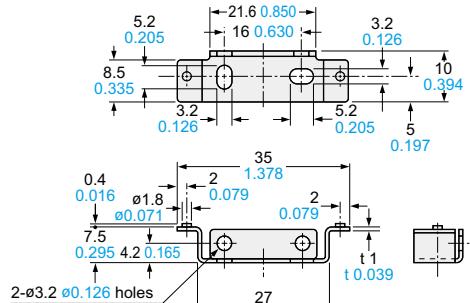

Material: Cold rolled carbon steel (SPCC)
(Uni-chrome plated)

MS-DIN-E

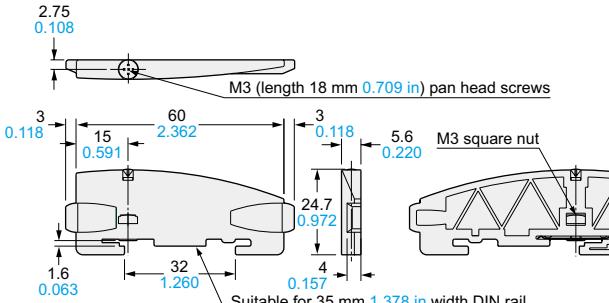

Material: Polycarbonate

Tough: Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.

Bending durability: Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

LIST OF FIBERS

Super quality type

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length	Sensing range (mm in) (Note 2, 3)				Beam axis dia. (mm)	Beam axis position / inclination of beam axis	Optical transmission loss	Protection	Ambient temp.				
					FX-500 series		FX-550 / FX-550L series										
Other modes		U-LG LONG		Other modes		U-LG LONG											
Thru-beam	Threaded	M3	Tough FT-30	R2	STD 400 15.748	810 31.890	STD 570 22.441	1,240 48.819	ø0.5	150 µm / ±2°	±10 %	IP67	-55 to +80 °C				
		M3			HYPR 1,350 53.150	650 25.591	830 32.677	830 32.677									
	Cylindrical	M4	Tough FT-40	R4	2,100 47.244	210 8.268	HYPR 3,600 141.732	3,600 141.732	ø1								
		M4			HYPR 1,350 53.150	75 2.953	190 7.480	960 37.795									
	Cylindrical	ø1.5	Tough FT-S20	R2	STD 400 15.748	810 31.890	STD 550 21.654	1,200 47.244	ø0.5								
		ø1.5			HYPR 1,350 53.150	650 25.591	210 8.268	800 31.496									
Reflective	Threaded	ø3	Tough FT-S30	R4	2,200 47.244	210 8.268	HYPR 3,600 141.732	3,600 141.732	ø1								
		ø3			HYPR 1,350 53.150	75 2.953	190 7.480	340 13.386									
	Cylindrical	M3	Tough FD-30	R2	STD 160 6.299	330 12.992	STD 210 8.268	460 18.110	150 µm / ±3°	150 µm / ±3°	±10 %	IP67	-55 to +80 °C				
		M3			HYPR 600 23.622	250 9.843	HYPR 800 31.496	330 12.992									
	Cylindrical	M4	Tough FD-40	R2	80 3.150	25 0.984	140 5.512	330 12.992									
		M4			1,550 61.024	90 3.543	1,750 68.898	420 16.535									
	Cylindrical	M6	Tough FD-60	R4	STD 160 6.299	330 12.992	STD 220 8.661	500 19.685									
		M6			HYPR 600 23.622	250 9.843	HYPR 800 31.496	330 12.992									
	Cylindrical	ø3	Tough FD-S30	R4	80 3.150	25 0.984	140 5.512	500 19.685									
		ø3			1,550 61.024	90 3.543	1,750 68.898	420 16.535									

Notes: 1) The fiber cable length practically limits the sensing range.

2) The sensing range of reflective type is specified for white non-glossy paper.

3) The **FX-550L** series does not have FAST mode.

4) It is not a free-cut type.

LIST OF FIBERS

Tough : Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.
Bending durability : Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

Threaded type

*Thru-beam type sensors are available as two pieces per set.

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length (mm)  Free-cut	Sensing range (mm in) (Note 1, 3)				Beam axis position / Inclination of beam axis	Protection	Ambient temp.		
					FX-500 series	Other modes	U-LG LONG FAST H-SP	FX-550 / FX-550L series	Other modes	U-LG LONG FAST			
Thru-beam Threaded	M3	FT-31	 	R2	2 m	STD ■ 315 12.402 HYPR ■ 1,350 53.150	770 30.315 550 21.654 210 8.268 70 2.756	STD ■ 480 18.898 HYPR ■ 1,580 62.205	1,000 39.370 700 27.559 290 11.417	ø0.5	150 µm / ±2°	IP67	-55 to +80 °C
		FT-31W		R1		STD ■ 260 10.236 HYPR ■ 990 38.976	590 23.228 440 17.323 150 5.906 53 2.087	STD ■ 420 16.535 HYPR ■ 1,300 51.181	890 35.039 580 22.835 250 9.843		150 µm / ±3°		-40 to +60 °C
		FT-32	 	R2		STD ■ 3,000 118.110 HYPR ■ 13,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 1,600 62.992 580 22.835	STD ■ 3,600 141.732 (Note 2) 3,600 141.732 (Note 2) HYPR ■ 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 2,900 114.173		ø1.6	—	IP40
	M4	FT-43		R4		STD ■ 1,400 55.118 HYPR ■ 3,600 141.732	2,800 110.236 2,100 82.677 770 30.315 240 9.449	STD ■ 2,200 86.614 HYPR ■ 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,100 122.047 1,400 55.118	ø1.5	150 µm / ±2°	IP67	-55 to +80 °C
		FT-42	 	R4		STD ■ 1,130 44.488 HYPR ■ 3,600 141.732	2,050 80.709 1,600 62.992 530 20.866 190 7.480	STD ■ 1,470 57.874 HYPR ■ 3,600 141.732 (Note 2)	2,900 114.173 2,100 82.677 890 35.039		150 µm / ±3°		-40 to +60 °C
		FT-42W		R1		STD ■ 800 31.496 HYPR ■ 3,300 129.921	1,900 74.803 1,400 55.118 490 19.291 1,300 129.921	STD ■ 1,200 47.244 HYPR ■ 3,600 141.732 (Note 2)	2,600 102.362 1,780 70.079 710 27.953		150 µm / ±2°	IP67	-40 to +60 °C
	M4	FT-45X		R4	1 m	STD ■ 1,200 47.244 HYPR ■ 1,600 62.992	1,600 62.992 (Note 2) 1,600 62.992 (Note 2) 630 24.803 200 7.874	STD ■ 1,600 62.992 (Note 2) HYPR ■ 1,600 62.992 (Note 2)	1,600 62.992 (Note 2) 1,600 62.992 (Note 2) 1,070 42.126	ø1	150 µm / ±3°	IP67	-55 to +80 °C
		FT-R40	 	R4		STD ■ 930 36.614 HYPR ■ 3,600 141.732	1,750 68.898 1,500 59.055 500 19.685 160 6.299	STD ■ 1,400 55.118 HYPR ■ 3,600 141.732 (Note 2)	2,900 114.173 1,950 76.772 860 33.858		150 µm / ±2°		-40 to +70 °C
		FT-140	 	R4		STD ■ 19,600 771.654 HYPR ■ 19,600 771.654	19,600 771.654 (Note 2) 19,600 771.654 (Note 2) 16,000 629.921 6,300 248.031	STD ■ 19,600 771.654 (Note 2) HYPR ■ 19,600 771.654 (Note 2)	19,600 771.654 (Note 2) 19,600 771.654 (Note 2) 19,600 771.654 (Note 2)		ø10	—	-40 to +70 °C

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The fiber cable length practically limits the sensing range.

3) The FX-550L series does not have FAST mode.

LIST OF FIBERS

Tough: Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.
Bending durability: Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

Threaded type

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length [: Free-cut]	Sensing range (mm in) (Note 1, 2, 3)					Beam axis position / Inclination of beam axis	Protection	Ambient temp.	
					FX-500 series		FX-550 / FX-550L series		FX-550 / FX-550L series				
Other modes		U-LG LONG		Other modes		U-LG LONG	FAST	Other modes		U-LG LONG	FAST		
Reflective Threaded	M3	M3	Tough [Bending durability] FD-31	R2	2 m	STD 125 4.921	290 11.417	STD	200 7.874	450 17.717	150 μ m / $\pm 3^\circ$	IP67	-55 to +80 °C
		M3	FD-31W	R1		HYPR 515 20.276	220 8.661	HYPR	140 5.118	310 12.205	-40 to +60 °C		
		Coaxial, Lens mountable M3	Tough [Bending durability] FD-32G	R2		STD 80 3.150	180 7.087	STD	130 5.118	310 12.205			
		Coaxial, Lens mountable, Stainless-jacketed M3	FD-32GX	R2	1 m (Note 4)	HYPR 330 12.992	140 5.512	HYPR	45 1.772	190 7.480	-55 to +80 °C	IP40	-40 to +60 °C
		Coaxial, With lens M3	Tough [Bending durability] FD-34G	R2		STD 200 7.874	270 10.630	STD	320 12.598	730 28.740			
		Coaxial, Lens mountable M3	FD-EG30	R2	2 m	HYPR 650 25.591	95 3.740	HYPR	1,150 45.278	420 16.535	-55 to +80 °C	IP40	-40 to +70 °C
		Coaxial, Lens mountable M3	FD-EG31	R4		STD 300 24.803	1,063 1.063	STD	130 5.118	310 12.205	-40 to +70 °C		
	Ultra-small diameter	Coaxial, Lens mountable M3	FD-41	R2	500 mm	STD 48 1.890	185 7.283	STD	130 5.118	310 12.205	-20 to +60 °C	IP40	-40 to +70 °C
		Coaxial, Lens mountable M3	FD-41W	R1		HYPR 170 6.693	135 5.305	HYPR	49 1.929	180 7.087			
		Coaxial, Lens mountable M4	Tough [Bending durability] FD-42G	R2		STD 200 7.874	15 0.591	STD	480 18.898	730 28.740	-55 to +80 °C		-20 to +60 °C
		Coaxial, Lens mountable M4	FD-42GW	R1		HYPR 170 6.693	35 1.378	HYPR	320 12.598	490 19.291			
Reflective Elbow	M4	M4	Tough [Bending durability] FD-62	R2	2 m	STD 125 4.921	290 11.417	STD	200 7.874	450 17.717	150 μ m / $\pm 3^\circ$	IP67	-55 to +80 °C
		M4	FD-61W	R1		HYPR 515 20.276	220 8.661	HYPR	140 5.118	310 12.205	-40 to +60 °C		
		Coaxial, Lens mountable M4	Tough [Bending durability] FD-61	R4		STD 270 10.630	630 24.803	STD	200 7.874	1,000 39.370	-55 to +80 °C		-40 to +60 °C
		Coaxial, Lens mountable M4	FD-61W	R1		HYPR 900 35.433	430 16.929	HYPR	480 18.898	680 26.772			
		M6	FD-62	R4		STD 200 7.874	380 14.961	STD	320 12.598	730 28.740	-55 to +80 °C	IP40	-40 to +60 °C
	M6	M6	Tough [Bending durability] FD-61	R2		HYPR 650 25.591	95 3.740	HYPR	1,150 45.278	420 16.535			
		M6	FD-61W	R1		STD 150 5.906	340 13.386	STD	210 8.268	540 21.260	-55 to +80 °C	IP67	-40 to +60 °C
		M6	FD-64X	R4		HYPR 670 26.378	280 11.024	HYPR	950 37.402	330 12.992			
		M6	FD-64X	R4	1 m	STD 270 10.630	630 24.803	STD	200 7.874	130 5.118	-55 to +80 °C	IP40	-40 to +60 °C
		M6	FD-R60	R4		HYPR 900 35.433	430 16.929	HYPR	1,400 55.118	270 10.630			
	Elbow	M6	Tough [Bending durability] FD-R60	R4	2 m	STD 280 11.024	500 19.685	STD	410 16.142	700 27.559	150 μ m / $\pm 3^\circ$	IP67	-55 to +80 °C
		M6	FD-R60	R4	2 m	HYPR 670 26.378	410 16.142	HYPR	620 24.409	590 23.228			
		M6	FD-R60	R4	2 m	STD 290 11.417	500 23.622	STD	500 19.685	1,200 47.244	1,150 45.276	150 μ m / $\pm 3^\circ$	IP67

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
 2) The sensing range is specified for white non-glossy paper.
 3) The **FX-550L** series does not have FAST mode.
 4) The allowable cutting range is 700 mm **27.559 in** from the end that the amplifier inserted.

LIST OF FIBERS

Tough : Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.
Bending durability : Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

Square head type

*Thru-beam type sensors are available as two pieces per set.

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length [: Free-cut]	Sensing range (mm in) (Note 1, 3, 4)				Beam axis dia. (Fiber Core) (mm)	Protection	Ambient temp.	
					FX-500 series		Other modes	FX-550 / FX-550L series	Other modes			
U-LG LONG FAST H-SP		U-LG LONG FAST										
Thru-beam	M3		FT-R31 Tough <small>Bending durability</small>		2 m	STD ■ 270 10.630 HYPR ■ 1,000 39.370	580 22.835 440 17.323 160 6.299 55 2.165	STD ■ 510 20.079 HYPR ■ 1,670 65.748	1,120 44.094 700 27.559 310 12.205	ø0.5	IP67	-55 to +80 °C
			FT-R43 Tough <small>Bending durability</small>			STD ■ 720 28.346 HYPR ■ 3,000 118.110	1,600 62.992 1,100 43.307 430 16.929 130 5.118	STD ■ 1,250 49.213 HYPR ■ 3,600 141.732 (Note 2)	2,650 104.331 1,750 68.898 750 29.528	ø1		
	M4		FT-R41W			STD ■ 1800 31.496 HYPR ■ 3,200 125.984	1,800 70.866 1,400 55.118 460 18.110 150 5.906	STD ■ 1,300 51.181 HYPR ■ 3,600 141.732 (Note 2)	2,900 114.173 1,850 72.835 800 31.496	ø1	IP40	-40 to +60 °C
			FT-R42W			STD ■ 2,200 86.614 HYPR ■ 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,500 137.955 1,300 51.181 460 18.110	STD ■ 3,600 141.732 (Note 2) HYPR ■ 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 2,800 110.236	ø2.2		
	M6		FT-R44Y Tough <small>Bending durability</small>			STD ■ 720 28.346 HYPR ■ 3,000 118.110	1,600 62.992 1,100 43.307 430 16.929 130 5.118	STD ■ 1,300 51.181 HYPR ■ 3,600 141.732 (Note 2)	2,900 114.173 1,800 70.866 800 31.496	ø1	IP67 (Note 5)	-55 to +80 °C
			FT-R60Y Tough <small>Bending durability</small>			STD ■ 2,100 82.677 HYPR ■ 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 1,260 49.606 400 15.748	STD ■ 3,600 141.732 (Note 2) HYPR ■ 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 1,900 74.803	ø3.5		
Reflective	M3		FD-R31G Tough <small>Bending durability</small>		2 m	STD ■ 170 6.693 HYPR ■ 530 20.866	310 12.205 260 10.236 85 3.346 27 1.063	STD ■ 290 11.417 HYPR ■ 900 35.433	600 23.622 400 15.748 160 6.299	Emitter ø0.5	IP40	-55 to +80 °C
			FD-R32EG			STD ■ 45 1.772 HYPR ■ 170 6.693	110 4.331 92 3.622 30 1.181 9 0.354	STD ■ 80 3.150 HYPR ■ 290 11.417	180 7.087 110 4.331 45 1.772	Emitter ø0.25		
			FD-R34EG			STD ■ 38 1.496 HYPR ■ 130 5.118	90 3.543 70 2.756 23 0.906 7 0.276	STD ■ 250 9.843	140 5.512 90 3.543 40 1.575	Emitter ø0.175		
			FD-R33EG			STD ■ 19 0.748 HYPR ■ 84 3.307	44 1.732 33 1.299 11 0.433 3 0.118	STD ■ 30 1.181 HYPR ■ 110 4.331	65 2.559 40 1.575 18 0.709	Emitter ø0.125		
	M4		FD-R41 Tough <small>Bending durability</small>		2 m	STD ■ 210 8.268 HYPR ■ 710 27.953	430 16.929 320 12.598 100 3.937 34 1.339	STD ■ 340 13.386 HYPR ■ 1,150 45.276	750 29.528 450 17.716 190 7.480	ø0.75	IP67	-55 to +80 °C
			FD-R61Y Tough <small>Bending durability</small>			STD ■ 280 11.024 HYPR ■ 990 38.976	610 24.016 435 17.126 160 6.299 50 1.969	STD ■ 450 17.717 HYPR ■ 1,350 53.150	1,000 39.370 650 25.591 250 9.843	—		

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The fiber cable length practically limits the sensing range.

3) The **FX-550L** series does not have FAST mode.

4) The sensing range of reflective type is specified for white non-glossy paper.

5) The fiber part is oil-resistant.

Tough: Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.

Bending durability: Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

LIST OF FIBERS

Cylindrical type

*Thru-beam type sensors are available as two pieces per set.

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length (mm) ✖: Free-cut	Sensing range (mm in) (Note 1, 3, 4)				Beam axis position / Inclination of beam axis	Protection	Ambient temp.
					FX-500 series	Other modes	U-LG LONG FAST H-SP	FX-550 / FX-550L series	Other modes	U-LG LONG FAST	
Thru-beam Cylindrical	Ø1	Ø1 	Tough Bending durability FT-S11	R2 500 mm	STD 90 3.543 HYPR 350 13.780	210 8.268 160 6.299 60 2.362 19 0.748	STD 130 5.118 HYPR 400 15.748	280 11.024 180 7.867 80 3.145	Ø0.25	—	IP67 -55 to +80 °C
	Ø1.5	Ø1.5 	Tough Bending durability FT-S21		STD 315 12.402 HYPR 1,350 53.150	770 30.315 550 21.654 210 8.268 70 2.756	STD 450 17.717 HYPR 1,600 62.992	1,000 39.370 670 26.378 280 11.024	Ø0.5	150 µm / ±2°	
	Ø1.5	Ø1.5 	FT-S21W	R1 2 m	STD 260 10.236 HYPR 1,990 38.976	590 23.228 440 17.323 150 5.906 53 2.087	STD 400 15.748 HYPR 1,650 64.961	850 33.465 580 22.835 240 9.449	Ø0.7	150 µm / ±3°	-40 to +60 °C
	With lens	Ø1.5 	Tough Bending durability FT-S22		STD 450 17.717 HYPR 1,500 59.055	920 36.220 730 28.740 250 9.843 90 3.543	STD 870 34.252 HYPR 2,900 114.173	1,900 74.803 1,200 47.244 530 20.866	Ø2	—	
	With lens, Long sensing range	Ø2.5 	FT-S32	R10 2 m	STD 3,100 122.047 HYPR 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 1,800 70.866 600 23.622	STD 3,600 141.732 (Note 2) HYPR 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 3,000 118.110	Ø1	150 µm / ±3°	IP40 -40 to +70 °C
	Ø2.5	Ø2.5 	FT-S31W		STD 800 31.496 HYPR 3,300 129.921	1,900 74.803 1,400 55.118 490 19.291 160 6.299	STD 1,100 43.307 HYPR 3,600 141.732 (Note 2)	2,450 96.457 1,600 62.992 650 25.591	Ø1	150 µm / ±3°	
	Ø3	Ø3 	FT-E13	R2 1 m	STD 15 0.591 HYPR 52 2.047	30 1.181 24 0.945 8 0.315 2 0.079	STD 21 0.827 HYPR 68 2.677	45 1.772 30 1.181 12 0.472	Ø0.125	IP67 -40 to +70 °C	
	Ø3	Ø3 	FT-E23		STD 75 2.953 HYPR 270 10.630	160 6.299 125 4.921 42 1.654 13 0.512	STD 120 4.724 HYPR 355 13.976	250 9.843 165 6.496 70 2.756	Ø0.25	—	
	Ø4	Ø4 	FT-V40	R4 2 m	STD 3,500 137.795 HYPR 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 2,400 94.488 850 33.465	STD 3,600 141.732 (Note 2) HYPR 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	Ø2.5	IP50 -40 to +60 °C	
Reflective Cylindrical	Ø1.5	Ø1.5 	FT-S23 NEW	R2 1 m	STD 46 1.811 HYPR 130 5.118	90 3.543 65 2.559 20 0.787 7 0.276	STD 75 2.953 HYPR —	130 5.118 110 4.331 40 1.575	—	IP40 -55 to +80 °C	
	Ø3	Ø3 	FD-S32		STD 420 16.535 HYPR 1,200 47.244	790 31.102 660 25.984 220 8.661 75 2.953	STD 600 23.622 HYPR 1,600 62.992	1,200 42.244 900 35.433 350 13.780	150 µm / ±3°		
	Ø3	Ø3 	FD-S32W	R1 2 m	STD 270 10.630 HYPR 900 35.433	630 24.803 430 16.929 150 5.906 45 1.722	STD 450 17.717 HYPR 1,400 55.118	1,000 39.370 650 25.591 250 9.843	—	IP67 -40 to +60 °C	
	Ø3	Ø3 	FD-S31		STD 125 4.921 HYPR 515 20.276	290 11.417 220 8.661 80 3.150 25 0.984	STD 200 7.874 HYPR 700 27.559	450 17.717 300 11.811 130 5.118	150 µm / ±3°		
	Coaxial Ø3	Coaxial Ø3 	FD-S33GW	R1 2 m	STD 150 5.906 HYPR 670 26.378	340 13.386 280 11.024 90 3.543 25 0.984	STD 240 9.449 HYPR 880 34.646	550 21.654 370 14.567 150 5.906	—	-55 to +80 °C	
	Coaxial, With lens Ø3	Coaxial, With lens Ø3 	FD-S34G		STD 90 3.543 HYPR 330 12.992	185 7.283 135 5.305 49 1.929 15 0.591	STD 130 5.118 HYPR 480 18.898	310 12.205 180 7.187 80 3.150	—		
	Ø1.5 Ø3	Ø1.5 Ø3 	FD-E13	R4 1 m	STD 12 0.472 HYPR 50 1.969	29 1.142 25 0.984 7 0.276 2 0.079	STD 23 0.906 HYPR 75 2.953	50 1.969 30 1.181 12 0.472	—	IP40 -40 to +60 °C	
	Ø3	Ø3 	FD-E23		STD 55 2.165 HYPR 170 6.693	120 4.724 80 3.150 30 1.181 9 0.354	STD 80 3.150 HYPR 290 11.417	170 6.693 105 4.134 45 1.772	—		

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The fiber cable length practically limits the sensing range.

3) The **FX-550L** series does not have FAST mode.

4) The sensing range of reflective type is specified for white non-glossy paper.











LIST OF FIBERS

Tough : Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.

Bending durability : Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

Sleeve type

*Thru-beam type sensors are available as two pieces per set.

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)  : Free-cut	Fiber cable length	Sensing range (mm in) (Note 1, 4, 5)				Beam axis dia. (mm)	Protection	Ambient temp.
					FX-500 series		FX-550 / FX-550L series				
Thru-beam	M3	Sleeve 40mm 	Tough  FT-31S	R2 (Note 2)	 2 m	STD 315 12.402	740 29.134	STD	1,000 39.370		-55 to +80 °C
		Sleeve 40mm 	Tough  FT-42S	R4 (Note 2)		HYPR 1,220 48.031	550 21.654	480 18.898	700 27.559		
	Ultra-small diameter 	Narrow beam ø0.125mm 	Tough  FT-E13	R2	 1 m	STD 15 0.591	30 1.181	STD	45 1.772		IP67 -40 to +70 °C
		Sleeve part cannot be bent. 	Tough  FT-E23	R2		HYPR 52 2.047	24 0.945	21 0.827	30 1.181		
		Narrow beam ø0.25mm 	Tough  FT-V23	R4		STD 75 2.953	125 4.921	120 4.724	250 9.843		
		Sleeve part cannot be bent. 	Tough  FT-V25	R2		HYPR 270 10.630	42 1.654	HYPR 355 13.976	165 6.496		
		Sleeve part cannot be bent. 	Tough  FT-V24W	R1		STD 240 9.449	550 21.654	STD	950 37.402		
	Cylindrical Side-view 	Sleeve part cannot be bent. 	Tough  FT-V30	R4	 2 m	HYPR 900 35.433	480 18.898	450 17.717	630 24.803	IP30 -40 to +60 °C	
		Sleeve part cannot be bent. 	Tough  FD-EG30S	R4		STD 50 1.969	1,000 39.370	750 29.528	2,400 94.488		
		Sleeve part cannot be bent. 	Tough  FD-41S	R2 (Note 2)		HYPR 170 6.693	280 11.024	HYPR 90 3.543	1,050 41.339		
		Sleeve 40 mm M4 	Tough  FD-41SW	R1 (Note 2)		STD 125 4.921	290 11.417	STD	450 17.717		
		Sleeve 40 mm M4 	Tough  FD-61S	R4 (Note 2)		HYPR 1515 20.276	220 8.661	200 7.874	310 12.205		
Reflective	Thru-beam	Sleeve 15 mm M3 	Tough  FD-E13	R4	 1 m	STD 50 1.969	110 4.331	STD	190 7.480		-40 to +70 °C
		Sleeve part cannot be bent. 	Tough  FD-41S	R2 (Note 2)		HYPR 170 6.693	80 3.150	90 3.543	120 4.724		
		Sleeve 40 mm M4 	Tough  FD-41SW	R1 (Note 2)		STD 80 3.150	290 11.417	STD	450 17.717		
		Sleeve 40 mm M4 	Tough  FD-61S	R4 (Note 2)		HYPR 330 12.992	220 8.661	140 5.512	310 12.205		
		Sleeve 40 mm M6 	Tough  FD-E13	R4		STD 420 16.535	790 31.102	STD	190 7.480		
	Cylindrical Side-view 	Sleeve part cannot be bent. 	Tough  FD-E23	R4	 1 m	HYPR 1,200 47.244	660 25.984	650 25.591	1,300 51.181		-40 to +60 °C
		Coaxial 	Tough  FD-V30	R2		STD 55 2.165	120 4.724	80 3.150	105 4.134		
		Sleeve part cannot be bent. 	Tough  FD-V30W	R1		HYPR 170 6.693	30 1.181	30 1.181	45 1.772		
		Small diameter 	Tough  FD-V50	R4		STD 65 2.559	130 5.118	STD	170 6.693		
		Sleeve part cannot be bent. 	Tough  FD-V50	R4		HYPR 240 9.449	120 4.724	90 3.243	105 4.134		

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) Bending radius of sleeve part is R10 mm **R0.394 in** or more.

3) The fiber cable length practically limits the sensing range.

4) The **FX-550L** series does not have FAST mode.

5) The sensing range of reflective type is specified for white non-glossy paper.

Tough: Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.
Bending durability: Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

LIST OF FIBERS

Flat type

*Thru-beam type sensors are available as two pieces per set.

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length [: Free-cut]	Sensing range (mm in) (Note 1, 3, 4)				Beam axis dia. (mm)	Protection	Ambient temp.		
					FX-500 series		FX-550 / FX-550L series						
Other modes		U-LG LONG		Other modes		U-LG LONG		FAST					
Thru-beam	Top sensing W3 x H8 x D12	FT-Z30H	R2	2 m	STD 3,500 137.795	3,600 141.732 (Note 2)	STD 3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	2 x 3	IP40	-40 to +60 °C	
	Top sensing W3 x H8 x D12	FT-Z30HW	R1		HYPR (Note 2) 3,600 141.732	3,600 141.732 (Note 2)	HYPR 3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)				
	Side sensing W3 x H12 x D8	FT-Z30E	R2		STD 3,500 137.795	3,600 141.732 (Note 2)	STD 3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)				
	Side sensing W3 x H12 x D8	FT-Z30EW	R1		HYPR (Note 2) 3,600 141.732	2,400 94.488	HYPR 3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)				
	Front sensing W8.5 x H12 x D3	FT-Z30	R2		STD 3,400 133.858	3,600 141.732 (Note 2)	STD 3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)				
	Front sensing W8.5 x H12 x D3	FT-Z30W	R1		HYPR (Note 2) 3,600 141.732	2,000 78.740	HYPR 3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)				
	Front sensing W10 x H7 x D2	FT-Z20W			STD 2,100 82.677	3,600 141.732 (Note 2)	STD 3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)				
	Fiber guide type W2 x H10 x D10	FT-Z20HBW			HYPR (Note 2) 3,600 141.732	1,200 47.244	HYPR 410 16.142	3,600 141.732 (Note 2)	2,200 86.614				
	Front sensing W14 x H7 x D3.5	FT-Z40W			STD 1,500 59.055	3,300 129.921	STD 3,200 125.984	2,800 110.236	3,600 141.732 (Note 2)				
	Fiber guide type W3.5 x H14 x D11	FT-Z40HBW			HYPR (Note 2) 3,600 141.732	1,000 39.370	HYPR 280 11.024	3,600 141.732 (Note 2)	1,700 66.929				
Reflective	With boss	FT-Z802Y	R4	2 m	STD 1,500 59.055	3,300 129.921	STD 2,300 90.551	2,000 78.740	3,600 141.732 (Note 2)	ø1.5	IP40	0 to +60 °C	
	Front sensing W14 x H7 x D3.5	FT-Z40W	HYPR (Note 2) 3,600 141.732		900 35.433	HYPR 740 11.417	1,300 51.181	1,600 62.992 (Note 2)					
	Fiber guide type W3.5 x H14 x D11	FT-Z40HBW	STD 800 31.496		1,400 55.118	STD 490 19.291	1,300 51.181	2,700 106.299					
	Easy mounting, Rectangular head SEMI S2 compliant (Note 5) Metal-free W7 x H15 x D13	FT-Z802Y	HYPR (Note 2) 3,300 129.921		490 19.291	HYPR 160 6.299	1,300 51.181	1,850 72.835					
	Front sensing W10 x H7 x D2	FD-Z20W	R1		STD 3,100 122.047	3,600 141.732 (Note 2)	STD 3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)				
	Fiber guide type W2 x H10 x D10	FD-Z20HBW			HYPR (Note 2) 3,600 141.732	1,900 74.803	HYPR 470 18.504	3,600 141.732 (Note 2)	750 29.528				
	Front sensing W14 x H7 x D3.5	FD-Z40W			STD 190 7.480	440 17.323	STD 390 15.254	290 11.417	3,600 141.732 (Note 2)				
	Fiber guide type W3.5 x H14 x D11	FD-Z40HBW			HYPR (Note 2) 790 31.102	3,600 141.732 (Note 2)	HYPR 470 18.504	190 7.480	3,600 141.732 (Note 2)				
	Front sensing W10 x H7 x D2	FD-Z20W			STD 260 10.236	540 21.260	STD 470 18.504	290 11.417	1,000 39.370				
	Fiber guide type W2 x H10 x D10	FD-Z20HBW			HYPR (Note 2) 760 29.921	1,300 141.732 (Note 2)	HYPR 2,300 59.155	190 7.480	680 26.772				
	Front sensing W14 x H7 x D3.5	FD-Z40W			STD 260 10.236	540 21.260	STD 480 18.898	2,300 59.155	270 10.630				
	Fiber guide type W3.5 x H14 x D11	FD-Z40HBW			HYPR (Note 2) 760 29.921	1,300 141.732 (Note 2)	HYPR 1,350 53.150	270 10.630	1,000 39.370				

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The fiber cable length practically limits the sensing range.

3) The **FX-550L** series does not have FAST mode.












4) The sensing range of reflective type is specified for white non-glossy paper.

5) The design takes into account the environmental testing required by SEMI S2. To ensure that the final system complies with the standards, you must design and use it in accordance with relevant standards, laws, and regulations.

LIST OF FIBERS

Tough : Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.
Bending durability : Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

Convergent reflective type

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut	Sensing range (mm in) (Note 1, 2, 3)				Protection	Ambient temp.	
					FX-500 series	Other modes	U-LG LONG FAST H-SP	FX-550 / FX-550L series	Other modes		
Convergent reflective	Glass substrate detection	Mapping  W25 x H7.3 x D30	FD-L32H	R4	 4 m	STD HYPR	0 to 87 0 to 3.425 0 to 56 0 to 2.205 1 to 38 0.039 to 1.496 Cannot use 1 to 110 0 to 4.331	STD HYPR	0 to 65 0 to 2.559 0 to 74 0 to 2.913 0 to 100 0 to 3.397	0 to 90 0 to 3.543 0 to 75 0 to 2.953 0 to 50 0 to 1.969	-40 to +60 °C
		Alignment  W20 x H29 x D3.8	FD-L30A	R2	 3 m	STD HYPR	0 to 43 0 to 1.693 0 to 43 0 to 1.693 0 to 43 0 to 1.693	STD HYPR	0 to 52 0 to 2.047 0 to 42 0 to 1.654 0 to 29 0 to 1.142	0 to 68 0 to 2.677 0 to 62 0 to 2.441 0 to 46 0 to 1.811	
		Alignment  W23.5 x H29 x D4.5	FD-L31A	R4	 2 m	STD HYPR	4 to 33 0.157 to 1.299 4 to 33 0.157 to 1.299 4 to 32 0.157 to 1.260 5 to 25 0.197 to 0.984	STD HYPR	3 to 42 0.118 to 1.654 0 to 50 0 to 1.967	2 to 43 0.079 to 1.693 3 to 42 0.118 to 1.654 3 to 40 0.118 to 1.575	
		Alignment  W17 x H29 x D3.8	FD-L24A	R2	 3 m	STD HYPR	0 to 28 0 to 1.102 0 to 23 0 to 0.906 0 to 31 0 to 1.220	STD HYPR	0 to 24 0 to 0.945 0 to 26 0 to 1.024 0 to 22 0 to 0.866 0 to 18 0 to 0.709	0 to 31 0 to 1.220 0 to 28 0 to 1.102 0 to 22 0 to 0.866	
		Seating confirmation  W18 x H29 x D3.8	FD-L25	R2	 2 m	STD HYPR	0 to 30 0 to 1.181 0 to 29 0 to 1.142 0 to 30 0 to 1.181	STD HYPR	0 to 33 0 to 1.299 0 to 30 0 to 1.181 0 to 28 0 to 1.102 2 to 23 0.079 to 0.906	0 to 34 0 to 1.339 0 to 33 0 to 1.299 0 to 31 0 to 1.220	
		Seating confirmation  W12 x H19 x D3	FD-L11	R4	 3 m	STD HYPR	0 to 10.5 0 to 0.413 0 to 9.5 0 to 0.374 0 to 9 0 to 0.354 0 to 8 0 to 0.315	STD HYPR	0 to 13 0 to 0.512 0 to 10 0 to 0.394 0 to 9 0 to 0.354 0 to 8 0 to 0.315	0 to 13 0 to 0.512 0 to 13 0 to 0.512 0 to 12 0 to 0.472	IP40 -20 to +70 °C
		Seating confirmation  W12 x H19 x D3	FD-L10	R4	 2 m	STD HYPR	0 to 5.5 0 to 0.217 0 to 5 0 to 0.197 0 to 6 0 to 0.236	STD HYPR	0 to 5 0 to 0.217 0 to 5 0 to 0.197 0 to 6 0 to 0.236	0 to 5.5 0 to 0.217 0 to 5.5 0 to 0.217 0 to 5 0 to 0.197	
		 W24 x H21 x D4	FD-L21	R2	 2 m	STD HYPR	1 to 18 0.039 to 0.709 1 to 18 0.039 to 0.709 2 to 15 0.079 to 0.591 3 to 12 0.118 to 0.472	STD HYPR	1 to 19 0.039 to 0.748 1 to 19 0.039 to 0.748 1 to 20 0.039 to 0.787	1 to 20 0.039 to 0.787 1 to 19 0.039 to 0.748 2 to 18 0.079 to 0.709	
		 W24 x H21 x D4	FD-L21W	R1	 1 m	STD HYPR	2 to 15 0.079 to 0.591 2 to 15 0.079 to 0.591 4 to 14 0.157 to 0.551 6.5 to 10 0.256 to 0.394	STD HYPR	2 to 18 0.079 to 0.709 2 to 18 0.079 to 0.709 1 to 19 0.039 to 0.748	1 to 19 0.039 to 0.748 2 to 18 0.079 to 0.709 3 to 17 0.118 to 0.669	
		 W6 x H18 x D14	FD-L20H	R2	 1 m	STD HYPR	0 to 35 0 to 1.378 0 to 23 0 to 0.906 0 to 45 0 to 1.772	STD HYPR	0 to 33 0 to 1.229 0 to 40 0 to 1.575 0 to 65 0 to 2.559	0 to 50 0 to 1.969 0 to 40 0 to 1.575 0 to 25 0 to 0.984	
	Ultra-small	 W7.2 x H7.5 x D2	FD-L12W	R1	 1 m	STD HYPR	0 to 12.5 0 to 0.492 0 to 8 0 to 0.315 0 to 14 0 to 0.551	STD HYPR	0 to 12 0 to 0.472 0 to 12 0 to 0.472 0.5 to 7 0.020 to 0.276 0.5 to 4 0.020 to 0.157	0 to 16 0 to 0.630 0 to 15 0 to 0.591 0 to 10 0 to 0.394	IP30 -40 to +60 °C

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The sensing range is specified for transparent glass 100 x 100 x 0.7 mm **3.937 x 3.937 x 0.028 in** (FD-L32H: R edge, FD-L21 and FD-L21W: t2 mm **0.079 in**) (FD-L20H: white non-glossy paper, FD-L10: silicon wafers 100 x 100 mm **3.937 x 3.937 in**).

3) The FX-550L series does not have FAST mode.

Tough: Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.
Bending durability: Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

■ LIST OF FIBERS

Small spot

Reflective type fiber & spot lens

Designation	Shape of head (mm)	Spot diameter (mm in) (Note 1)	Sensing range (mm in) (Note 1)	Lens		Applicable fibers								
				Model No.	Ambient temp.	Model No.	Fiber cable length Free-cut (Note 2)	Bending radius (mm)	Protection	Ambient temp.				
Finest spot lens		$\phi 0.1 \phi 0.004$ approx.	Distance to focal point 7 ± 0.5 0.276 ± 0.020	FX-MR7	-55 to +70 °C	FD-R33EG	500 mm	R4	IP40	-20 to +60 °C				
						FD-EG31								
						FD-R34EG								
		$\phi 0.2 \phi 0.008$ approx.				FD-R32EG								
						FD-EG30								
		$\phi 0.4 \phi 0.016$ approx.				Tough Bending durability FD-R31G	2 m	R2	IP40	-40 to +70 °C				
						Tough Bending durability FD-42G								
						FD-42GW		R1						
						Tough Bending durability FD-32G								
						FD-32GX	1 m (Note 3)	R2	IP40	-55 to +80 °C				
Finest spot lens		$\phi 0.1 \phi 0.004$ approx.	Distance to focal point 7 ± 0.5 0.276 ± 0.020	FX-MR6	-20 to +60 °C	FD-R33EG	500mm	R4	IP40	-20 to +60 °C				
						FD-EG31								
						FD-R34EG								
		$\phi 0.2 \phi 0.008$ approx.				FD-R32EG								
						FD-EG30								
		$\phi 0.4 \phi 0.016$ approx.				Tough Bending durability FD-R31G	2 m	R2	IP40	-40 to +70 °C				
						Tough Bending durability FD-42G								
						FD-42GW		R1						
						Tough Bending durability FD-32G								
						FD-32GX	1m (Note 3)	R2	IP40	-55 to +80 °C				

Notes: 1) Spot diameter, sensing range and distance to focal point are specified for FX-500 / FX-550 / FX-550L series.

2) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

3) The allowable cutting range is 700 mm **27.559 in** from the end that the amplifier inserted.

LIST OF FIBERS

Tough : Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.
Bending durability : Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

Small spot

Reflective type fiber & spot lens

Designation	Shape of head (mm)	Spot diameter (mm in) (Note 1)	Sensing range (mm in) (Note 1)	Lens		Applicable fibers							
				Model No.	Ambient temp.	Model No.	Fiber cable length (Note 2)	Bending radius (mm)	Protection	Ambient temp.			
Finest spot lens		$\phi 0.15 \phi 0.006$ approx.	Distance to focal point 7.5 ± 0.5 0.295 ± 0.020	FX-MR3	-40 to $+70$ °C	FD-R33EG	500mm	R4	IP40	-20 to $+60$ °C			
						FD-EG31							
		$\phi 0.2 \phi 0.008$ approx.				FD-R34EG							
		$\phi 0.3 \phi 0.012$ approx.				FD-R32EG							
		$\phi 0.5 \phi 0.020$ approx.				FD-EG30	2m	R2	IP40	-40 to $+70$ °C			
						Tough (Bending durability) FD-R31G							
						Tough (Bending durability) FD-42G							
						FD-42GW							
Zoom lens		$\phi 0.4$ to $\phi 2.0$ $\phi 0.016$ to $\phi 0.079$ approx.	10 to 30 0.394 to 1.181	FX-MR8	-55 to $+70$ °C	FD-R33EG	500 mm	R4	IP40	-20 to $+60$ °C			
						FD-EG31							
		$\phi 0.4$ to $\phi 2.2$ $\phi 0.016$ to $\phi 0.087$ approx.				FD-R34EG							
		$\phi 0.5$ to $\phi 2.5$ $\phi 0.020$ to $\phi 0.098$ approx.				FD-R32EG							
		$\phi 0.8$ to $\phi 3.5$ $\phi 0.031$ to $\phi 0.138$ approx.				FD-EG30	2 m	R2	IP40	-40 to $+70$ °C			
						Tough (Bending durability) FD-R31G							
						Tough (Bending durability) FD-32G							
						FD-32GX							

Notes: 1) Spot diameter, sensing range and distance to focal point are specified for FX-500 / FX-550 / FX-550L series.

2) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

3) The allowable cutting range is 700 mm **27.559 in** from the end that the amplifier inserted.

Tough: Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.
Bending durability: Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

■ LIST OF FIBERS

Small spot

Reflective type fiber & spot lens

Designation	Shape of head (mm)	Spot diameter (mm in) (Note 1)	Sensing range (mm in) (Note 1)	Lens		Applicable fibers				
				Model No.	Ambient temp.	Model No.	Fiber cable length	Bending radius (mm)	Protection	Ambient temp.
Parallel light lens		$\varnothing 4 \text{ } \varnothing 0.157$ approx.	0 to 30 0 to 1.181	FX-MR9	-55 to +70 °C	FD-R33EG	500 mm	R4	IP40	-20 to +60 °C
						FD-EG31				
						FD-R34EG				
						FD-R32EG				
						FD-EG30				
						FD-R31G	2 m	R2	IP40	-40 to +70 °C
						FD-42G				
						FD-42GW	1 m (Note 3)	R1	IP40	-55 to +80 °C
						FD-32G				
						FD-32GX				
Pinpoint spot lens		$\varnothing 0.5 \text{ } \varnothing 0.020$	Distance to focal point 6 ± 1 0.236 ± 0.039	FX-MR1	-40 to +70 °C	FD-42G	2 m	R2	IP40	-55 to +80 °C
						FD-42GW				
Zoom lens		$\varnothing 0.7 \text{ to } \varnothing 2.0$ $\varnothing 0.028 \text{ to } \varnothing 0.079$ approx.	Distance to focal point $18.5 \text{ to } 43$ $0.728 \text{ to } 1.693$ approx.	FX-MR2	-40 to +70 °C	FD-42G	2 m	R2	IP40	-40 to +60 °C
						FD-42GW				
Zoom lens (Side-view type)		$\varnothing 0.5 \text{ to } \varnothing 3.0$ $\varnothing 0.020 \text{ to } \varnothing 0.118$ approx.	Distance to focal point $13 \text{ to } 30$ $0.512 \text{ to } 1.181$ approx.	FX-MR5	-40 to +60 °C	FD-42G	1 m (Note 3)	R2	IP40	-55 to +80 °C
						FD-42GW				

Notes: 1) Spot diameter, sensing range and distance to focal point are specified for FX-500 / FX-550 / FX-550L series.

2) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

3) The allowable cutting range is 700 mm **27.559 in** from the end that the amplifier inserted.







Tough : Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.

Bending durability : Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

LIST OF FIBERS

Narrow beam

*Thru-beam type sensors are available as two pieces per set.

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length ✖: Free-cut	Sensing range (mm in) (Note 1, 3, 4, 5)				Beam axis dia. (mm)	Inclination of beam axis	Protection	Ambient temp.	
					FX-500 series		FX-550 / FX-550L series						
Thru-beam Narrow beam Side-view	Aperture angle 2° 	FT-KS40 	R2 2 m	✖: Free-cut	STD 3,600 141.732 (Note 2) HYPR 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	STD 3,600 141.732 (Note 2) HYPR 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	✖ 2.2	—	IP40	-40 to +80 °C
	Aperture angle 2° 	FT-KV40 			STD 3,600 141.732 (Note 2) HYPR 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 3,100 122.047 (Note 2)	STD 3,600 141.732 (Note 2) HYPR 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	✖ 2.5	±0.8°	IP30	-40 to +60 °C
	Aperture angle 2° 	FT-KV40W 			STD 3,600 141.732 (Note 2) HYPR 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 3,100 122.047 (Note 2)	STD 3,600 141.732 (Note 2) HYPR 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	✖ 1	X ±1° Z ±0.5°	IP40	-40 to +80 °C
	Aperture angle 3° 1.5 x 2 	FT-KV26 			STD 710 27.953 HYPR 2,500 98.425	1,600 62.992 1,200 47.244 440 17.323 160 6.299	STD 1,000 43.307 HYPR 650 25.591	2,300 90.551 1,600 62.992 650 25.591	2,300 90.551 1,600 62.992 650 25.591	—	—	IP30	-40 to +80 °C
	Aperture angle 3° 1.5 x 2 	FT-KV26H1 			STD 630 24.803 HYPR 2,200 86.614	1,430 56.299 1,070 42.126 390 15.354 135 5.315	STD 1,000 39.370 HYPR 3,600 141.732 (Note 2)	1,900 74.803 1,400 55.118 3,600 141.732 (Note 2)	1,900 74.803 1,400 55.118 3,600 141.732 (Note 2)	—	—	IP40	-40 to +105 °C
Retroreflective Ultra-narrow beam	With polarizing filter 	FR-Z50HW 	R1 2 m	✖: Free-cut	STD 100 to 990 3.937 to 38.976 HYPR 100 to 1,900 3.937 to 74.803	100 to 1,400 3.937 to 55.118 100 to 1,200 3.937 to 47.244 100 to 780 3.937 to 30.709 100 to 490 3.937 to 19.291	STD 100 to 1,150 3.937 to 45.278 HYPR 100 to 1,400 3.937 to 55.118 100 to 950 3.937 to 37.402	100 to 1,800 3.937 to 70.866 100 to 1,400 3.937 to 55.118 100 to 950 3.937 to 37.402	100 to 1,800 3.937 to 70.866 100 to 1,400 3.937 to 55.118 100 to 950 3.937 to 37.402	—	—	IP40	-25 to +55 °C
	Aperture angle 3° (emitter) 	FR-KZ22E 			STD 15 to 310 0.591 to 12.205 HYPR 15 to 570 0.591 to 22.441	15 to 460 0.591 to 18.110 15 to 410 0.591 to 16.142 15 to 220 0.591 to 8.661 15 to 100 0.591 to 3.937	STD 15 to 540 0.591 to 21.260 HYPR 15 to 800 0.591 to 31.496	15 to 700 0.591 to 27.559 15 to 600 0.591 to 23.622 15 to 400 0.591 to 15.748	15 to 700 0.591 to 27.559 15 to 600 0.591 to 23.622 15 to 400 0.591 to 15.748	—	—	IP30	-40 to +60 °C
	Top sensing 	FR-KZ50H 			STD 20 to 300 0.787 to 11.811 HYPR 20 to 1,000 0.787 to 39.370	20 to 800 0.787 to 31.496 20 to 400 0.787 to 15.748 20 to 200 0.787 to 7.874 20 to 200 0.787 to 7.874	STD 20 to 400 0.787 to 15.748 HYPR 20 to 1,600 0.787 to 62.992	20 to 1,300 0.787 to 51.181 20 to 500 0.787 to 19.685 20 to 350 0.787 to 13.780	20 to 1,300 0.787 to 51.181 20 to 500 0.787 to 19.685 20 to 350 0.787 to 13.780	—	—	IP40	-40 to +60 °C
Reflective Long range	Side sensing 	FR-KZ50E 	R1 2 m	✖: Free-cut	STD 10 to 650 0.394 to 25.591 HYPR 10 to 2,500 0.394 to 98.425	10 to 1,100 0.394 to 43.307 10 to 1,000 0.394 to 39.370 10 to 410 0.394 to 16.142 15 to 130 0.394 to 5.118	STD 10 to 950 0.394 to 37.402 HYPR 10 to 3,700 0.394 to 154.689	10 to 2,100 0.394 to 82.677 10 to 1,300 0.394 to 51.181 10 to 590 0.394 to 23.228	10 to 2,100 0.394 to 82.677 10 to 1,300 0.394 to 51.181 10 to 590 0.394 to 23.228	—	—	IP40	-40 to +60 °C

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The fiber cable length practically limits the sensing range.

3) The **FX-550L** series does not have FAST mode.

4) The sensing range of retroreflective type is the possible setting range for the attached reflector. The fiber can detect an object less than setting range for the reflector. Refer to the next page for the sensing range when **FR-Z50HW** is used in combination with a reflector (optional).

5) The sensing range of reflective type is specified for white non-glossy paper.

Tough: Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.

Bending durability: Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

LIST OF FIBERS

Wide beam

*Thru-beam type sensors are available as two pieces per set.

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length : Free-cut	Sensing range (mm in) (Note 1, 4, 5)				Beam axis dia. (mm)	Protection	Ambient temp.	
					FX-500 series		FX-550 / FX-550L series					
Other modes		U-LG LONG FAST H-SP		Other modes		U-LG LONG FAST						
Thru-beam	Wide beam	FT-A32 (Note 2)		2 m	STD	3,600 141.732 (Note 3)	STD	3,600 141.732 (Note 3)	3,600 141.732 (Note 3)	3.2 x 32	-40 to +60 °C	
					HYPR	3,600 141.732 (Note 3)	HYPR	3,600 141.732 (Note 3)	3,600 141.732 (Note 3)			
	Wide beam	FT-A32W (Note 2)			STD	3,600 141.732 (Note 3)	STD	3,600 141.732 (Note 3)	3,600 141.732 (Note 3)	2.2 x 11	-40 to +55 °C	
					HYPR	3,600 141.732 (Note 3)	HYPR	3,600 141.732 (Note 3)	3,600 141.732 (Note 3)			
	Wide beam	FT-A11 (Note 2)			STD	3,600 141.732 (Note 3)	STD	3,600 141.732 (Note 3)	3,600 141.732 (Note 3)	IP40	-40 to +70 °C	
					HYPR	3,600 141.732 (Note 3)	HYPR	3,600 141.732 (Note 3)	3,600 141.732 (Note 3)			
	Wide beam	FT-A11W (Note 2)			STD	3,600 141.732 (Note 3)	STD	3,600 141.732 (Note 3)	3,600 141.732 (Note 3)	2.2 x 11	-40 to +55 °C	
					HYPR	3,600 141.732 (Note 3)	HYPR	3,600 141.732 (Note 3)	3,600 141.732 (Note 3)			
	Array	FT-AL05			STD	1,550 61.024	STD	1,150 45.276	2,350 92.520	0.25 x 5.5	-55 to +80 °C	
					HYPR	860 33.858	HYPR	500 19.685	1,600 62.992			
Reflective	Wide beam	FD-A16			STD	200 7.874	STD	350 13.780	350 13.780	—	-40 to +60 °C	
					HYPR	200 7.874	HYPR	140 5.512	250 9.843			
	Array	FD-AL12 NEW			STD	530 20.866	STD	420 16.535	900 35.433	—	IP40	
					HYPR	270 10.630	HYPR	150 5.906	570 22.441			
Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut. 2) The slit mask (accessory) is sold separately. Refer to the last page for more details. 3) The fiber cable length practically limits the sensing range. 4) The FX-550L series does not have FAST mode. 5) The sensing range of reflective type is specified for white non-glossy paper.												

LIST OF FIBERS

Tough : Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.
Bending durability : Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

Retroreflective type

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length [: Free-cut]	Sensing range (mm in) (Note 1, 2, 3)				Protection	Ambient temp.		
					FX-500 series		Other modes	U-LG LONG FAST H-SP	FX-550 / FX-550L series			
Retroreflective	With polarizing filters 	FR-Z50HW	R1 2 m		STD 	100 to 1,400 3.937 to 55.118 100 to 1,200 3.937 to 47.244 100 to 780 3.937 to 30.709 100 to 490 3.937 to 19.291	STD 	100 to 1,800 3.937 to 70.866 100 to 1,400 3.937 to 55.118 100 to 950 3.937 to 37.402	IP40	-25 to +55 °C		
					HYPR 	HYPR 						
	Ultra-narrow beam 	FR-KZ22E			STD 	15 to 460 0.591 to 18.110 15 to 410 0.591 to 16.142 15 to 220 0.591 to 8.661 15 to 100 0.591 to 3.937	STD 	15 to 700 0.591 to 27.559 15 to 600 0.591 to 23.622 15 to 400 0.591 to 15.748				
					HYPR 	HYPR 						
Narrow beam	Narrow beam 	FR-KZ50H			STD 	20 to 800 0.787 to 31.496 20 to 400 0.787 to 15.748 20 to 200 0.787 to 7.874 20 to 200 0.787 to 7.874	STD 	20 to 1,300 0.787 to 51.181 20 to 500 0.787 to 19.685 20 to 350 0.787 to 13.780	IP30	-40 to +60 °C		
					HYPR 	HYPR 						

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The sensing range is the possible setting range for the attached reflector. The fiber can detect an object less than setting range for the reflector.

3) The **FX-550L** series does not have FAST mode.

<Sensing range when FR-Z50HW is used in combination with a reflector (optional)>

Reflector model No.	Sensing range (mm in)										
	FX-500 series					FX-550 / FX-550L series					
	HYPR	U-LG	LONG	STD	FAST	H-SP	HYPR	U-LG	LONG	STD	FAST
RF-230	100 to 19,000 3.937 to 748.030	100 to 8,000 3.937 to 314.960	100 to 5,000 3.937 to 196.850	100 to 3,600 3.937 to 141.732	100 to 2,900 3.937 to 114.173	100 to 1,400 3.937 to 55.118	100 to 20,000 3.937 to 78.402	100 to 11,000 3.937 to 433.071	100 to 7,000 3.937 to 275.591	100 to 5,000 3.937 to 196.850	100 to 3,500 3.937 to 137.795
RF-220	100 to 8,000 3.937 to 314.960	100 to 4,700 3.937 to 185.039	100 to 3,500 3.937 to 137.795	100 to 3,000 3.937 to 118.110	100 to 1,800 3.937 to 70.866	100 to 830 3.937 to 32.677	100 to 10,000 3.937 to 393.701	100 to 6,500 3.937 to 255.906	100 to 4,500 3.937 to 177.165	100 to 3,500 3.937 to 137.795	100 to 2,500 3.937 to 98.425
RF-210	100 to 5,500 3.937 to 216.535	100 to 2,700 3.937 to 106.299	100 to 2,400 3.937 to 94.488	100 to 1,500 3.937 to 59.055	100 to 1,200 3.937 to 47.244	100 to 530 3.937 to 20.866	100 to 7,000 3.937 to 275.591	100 to 4,000 3.937 to 157.480	100 to 3,600 3.937 to 141.732	100 to 2,800 3.937 to 110.236	100 to 2,100 3.937 to 82.677


Note: 1) The sensing range is the possible setting range for the reflector. The fiber can detect an object less than 100 mm **3.937 in**. However, note that if there are any white or highly-reflective surfaces near the fiber head, reflected incident light may affect the fiber head. If this occurs, adjust the threshold value of the amplifier unit before use.

2) The **FX-550L** series does not have FAST mode.

Tough: Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.
Bending durability: Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

LIST OF FIBERS

<Heat-resistant joint fiber set contents>

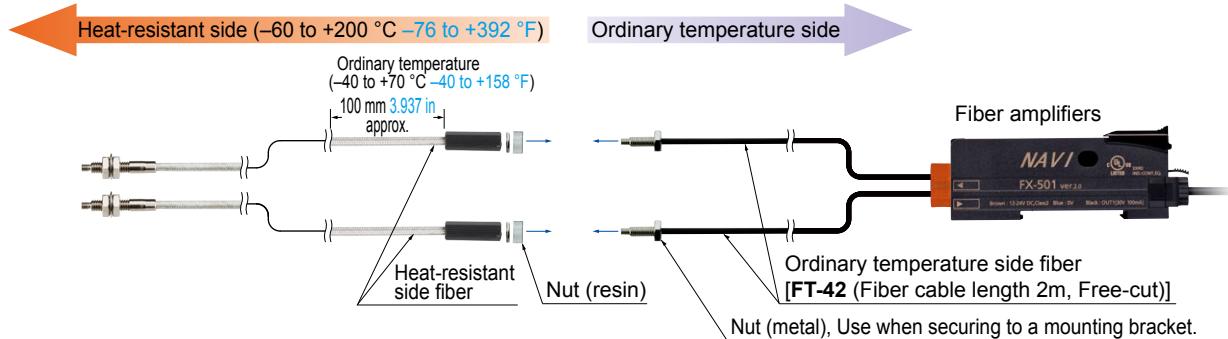

Heat-resistant

*Thru-beam type sensors are available as two pieces per set.

Type	Heat-resistant temp.	Shape of fiber head (mm)	Model No.	Bending radius (mm) [: Free-cut]	Fiber cable length [: Free-cut]	Sensing range (mm in) (Note 1, 3)				Beam axis dia. (mm)	Ambient temp.							
						FX-500 series		Other modes	FX-550 / FX-550L series									
U-LG LONG FAST H-SP		U-LG LONG FAST H-SP		Other modes		U-LG LONG FAST		Other modes										
Thru-beam	Heat-resistant	350 °C	Lens mountable (FX-LE1/LE2/SV1) 	FT-H35-M2	R25	2 m	STD 430 16.929	880 34.646 670 26.378 250 9.843 80 3.150	STD 1,050 41.339 HYPR 1,200 47.244	2,300 90.551 1,500 59.055 650 25.591	ø1.2	-60 to +350 °C						
		200 °C	Sleeve 60 mm 	FT-H35-M2S6	Fiber R25 Sleeve R10	1 m	STD 470 18.504 HYPR (Note 2) 1,600 62.992	1,000 39.370 840 33.071 300 11.811 90 3.543	STD 730 28.740 HYPR 1,600 62.992 (Note 2)	1,600 62.992 (Note 2) 1,050 41.339 440 17.323	ø0.8	-60 to +200 °C						
		130 °C	Allows flexible wiring Lens mountable (FX-LE1/LE2/SV1) 	FT-H20W-M1	R10	R25	STD 470 18.504 HYPR (Note 2) 1,600 62.992	1,300 51.181 960 37.795 330 12.992 110 4.331	STD 730 28.740 HYPR 1,600 62.992 (Note 2)	1,600 62.992 (Note 2) 1,600 62.992 (Note 2) 600 23.622	ø1.2	-60 to +130 °C						
	Heat-resistant (joint)	200 °C	Lens mountable (FX-LE1/LE2/SV1) 	FT-H20-J20-S (Note 6)	Heat-resistant side R18 (Note 5)	200 mm (Note 4)	STD 470 18.504 HYPR (Note 4) 1,600 62.992	1,000 39.370 790 31.102 300 11.811 90 3.543	STD 860 33.858 HYPR 2,600 102.362	1,800 70.866 1,200 47.244 530 20.866	ø1.2	-60 to +200 °C						
		Side-view	FT-H20-J30-S (Note 6)			300 mm (Note 4)												
		200 °C	FT-H20-J50-S (Note 6)			500 mm (Note 4)												
		200 °C	FT-H20-VJ50-S (Note 6)			800 mm (Note 4)												

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The fiber cable length practically limits the sensing range.

3) The **FX-550L** series does not have FAST mode.

4) Fiber length (fixed-length) for heat-resistant fiber side. Fiber length for ordinary temperature side is 2 m **6.562 ft** (free-cut).

5) Bending-resistant fiber R4 mm **R0.157 in** or more for ordinary temperature side.

6) Heat-resistant joint fibers and ordinary-temperature fibers (**FT-42**) are sold as a set.

LIST OF FIBERS

Tough : Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.

Bending durability : Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

Heat-resistant

Type	Heat-resistant temp.	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length (mm) [: Free-cut]	Sensing range (mm in) (Note 1, 2, 3)				Ambient temp.		
						FX-500 series	Other modes	U-LG LONG FAST H-SP	FX-550 / FX-550L series			
Reflective Heat-resistant	350 °C	Coaxial M6 25	FD-H35-M2	R25	2 m	STD 260 10.236 HYPR 720 28.346	540 21.260 460 18.110 150 5.906 45 1.772	STD 400 15.748 HYPR 750 29.528	600 23.662 500 19.685 220 8.661	-60 to +350 °C		
			FD-H35-M2S6	Fiber R25 Sleeve R10			STD 260 10.236 HYPR 840 33.071	550 21.654 440 17.323 140 5.512 45 1.772	STD 410 16.142 HYPR 850 33.465	750 29.528 550 21.654 230 9.055		
			FD-H35-20S				STD 330 12.992 HYPR 840 33.071	550 21.654 500 19.685 200 7.874 55 2.165	STD 450 17.717 HYPR 1,350 53.150	1,000 39.370 650 25.591 300 11.811		
	200 °C	Coaxial M6 28	FD-H20-M1	R25	1 m	STD 230 9.055 HYPR 770 30.315	500 19.685 380 14.961 130 5.118 45 1.772	STD 450 17.717 HYPR 1,250 49.213	850 33.465 650 25.591 250 9.843	-60 to +200 °C		
		Coaxial M4 27	FD-H20-21				STD 350 13.780 HYPR 880 34.646	640 25.197 600 23.622 200 7.874 65 2.559	STD 670 26.378 HYPR 1,650 64.961	1,300 51.181 940 37.008 390 15.354		
	130 °C	Coaxial M6 21	FD-H13-FM2		2 m	STD 0 to 17 0 to 0.669 HYPR 0 to 40 0 to 1.575	0 to 30 0 to 1.181 0 to 25 0 to 0.984 0 to 12 0 to 0.472 1.5 to 6 0.059 to 0.236	STD 0 to 21 0 to 0.827 HYPR 0 to 60 0 to 2.362	0 to 42 0 to 1.654 0 to 25 0 to 0.984 0 to 16 0 to 0.630	0 to 42 0 to 1.654 0 to 25 0 to 0.984 0 to 16 0 to 0.630	-60 to +130 °C	
	300 °C	W19 x H27 x D5	FD-H30-L32				STD 1 to 26 0.059 to 1.024 HYPR 1 to 31 0.039 to 1.220	1 to 30 0.039 to 1.181 1 to 28 0.039 to 1.102 1.5 to 24 0.059 to 0.945 2 to 18 0.079 to 0.709	STD 1 to 28 0.039 to 1.102 HYPR 1 to 31 0.039 to 1.220	1 to 30 0.039 to 1.181 1 to 29 0.039 to 1.142 1 to 26 0.039 to 1.024		
	250 °C	W21 x H33.2 x D5	FD-H25-L43		3 m	STD 5 to 42 0.197 to 1.654 HYPR 4 to 43.5 0.157 to 1.713	4 to 43 0.157 to 1.693 4.5 to 43 0.177 to 1.693 5 to 40 0.197 to 1.575 6.5 to 34 0.256 to 1.339	STD 4 to 48 0.157 to 1.890 HYPR 4 to 51 0.157 to 2.008	4 to 50 0.157 to 1.969 4 to 49 0.157 to 1.929 4 to 44 0.157 to 1.732	-20 to +250 °C (Ordinary temp. side: -20 to +70 °C)		
		W21 x H34.5 x D5	FD-H25-L45				STD 0 to 16 0 to 0.630 HYPR 0 to 60 0 to 2.362	0 to 32 0 to 1.260 0 to 24 0 to 0.945 0 to 13 0 to 0.512 2 to 6.5 0.079 to 0.256	STD 0 to 45 0 to 1.772 HYPR 0 to 130 0 to 5.118	0 to 85 0 to 3.346 0 to 60 0 to 2.362 0 to 30 0 to 1.181		
	180 °C	W19 x H27 x D5	FD-H18-L31		2 m	STD 0 to 16 0 to 0.630 HYPR 0 to 60 0 to 2.362	0 to 32 0 to 1.260 0 to 24 0 to 0.945 0 to 13 0 to 0.512 2 to 6.5 0.079 to 0.256	STD 0 to 45 0 to 1.772 HYPR 0 to 130 0 to 5.118	0 to 85 0 to 3.346 0 to 60 0 to 2.362 0 to 30 0 to 1.181	-60 to +180 °C		

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The sensing range of reflective type is the value for white non-glossy paper (50 x 50 mm **1.969 x 1.969 in** glass substrate for **FD-H30-L32** and **FD-H18-L31**, transparent glass 100 x 100 x 10.7 mm **3.937 x 3.937 x 10.028 in** for **FD-H25-L43** and **FD-H25-L45**).

3) The **FX-550L** series does not have FAST mode.


LIST OF FIBERS

Tough: Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.
Bending durability: Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

Oil-resistant

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length (mm): Free-cut	Sensing range (mm in) (Note 1, 2, 3)					Beam axis dia. (mm)	Protection	Ambient temp.		
					FX-500 series		FX-550 / FX-550L series		U-LG LONG FAST H-SP					
Thru-beam	Oil-resistant	M6		Tough (Bending durability) FT-R60Y	R4	2 m	STD	3,600 141.732 (Note 4) 3,600 141.732 (Note 4) 1,260 49.606 400 15.748	3,600 141.732 (Note 4) 3,600 141.732 (Note 4) 1,900 74.803	STD HYPR	3,600 141.732 (Note 4) 3,600 141.732 (Note 4)	ø3.5	IP68G	-55 to +80 °C
							STD	1,600 62.992 1,100 43.307 430 16.929 130 5.118	1,300 51.181 HYPR	2,900 114.173 1,800 70.866 800 31.496	ø1	IP67 (Note 5)		
Reflective	Oil-resistant	M6		Tough (Bending durability) FT-R44Y	R4	2 m	STD	1,600 62.992 1,100 43.307 430 16.929 130 5.118	1,300 51.181 HYPR	2,900 114.173 1,800 70.866 800 31.496	ø1	IP67 (Note 5)	-55 to +80 °C	
							STD	610 24.016 435 17.126 160 6.299 50 1.969	450 17.717 HYPR	1,000 39.370 650 25.591 250 9.843	—	IP67 (Note 5)		
Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut. 2) The FX-550L series does not have FAST mode. 3) The sensing range of reflective type is specified for white non-glossy paper. 4) The fiber cable length practically limits the sensing range. 5) The fiber part is oil-resistant.														


Chemical-resistant

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length (mm): Free-cut	Sensing range (mm in) (Note 1, 2, 3)					Beam axis dia. (mm)	Protection	Ambient temp.		
					FX-500 series		FX-550 / FX-550L series		U-LG LONG FAST H-SP					
Thru-beam	Chemical-resistant	Flat type		Tough (Bending durability) FT-Z802Y	R4	2 m	STD	3,600 141.732 (Note 4) 3,600 141.732 (Note 4) 1,900 74.803 470 18.504	STD HYPR	3,600 141.732 (Note 4) 3,600 141.732 (Note 4) 3,600 141.732 (Note 4)	ø3.5	IP68G	0 to +60 °C	
							STD	3,600 141.732 (Note 4) 3,600 141.732 (Note 4) 2,300 90.551 740 29.134	STD HYPR	3,600 141.732 (Note 4) 3,600 141.732 (Note 4) 3,600 141.732 (Note 4)	ø3.7	IP68G		
Thru-beam	Chemical-resistant	Cylindrical type		FT-HL80Y (Note 7)	R30	2 m (Note 5)	STD	3,600 141.732 (Note 4) 3,600 141.732 (Note 4) 2,300 90.551 740 29.134	STD HYPR	3,600 141.732 (Note 4) 3,600 141.732 (Note 4) 3,600 141.732 (Note 4)	ø3.7	IP68G	-40 to +115 °C	
							STD	3,600 141.732 (Note 4) 3,600 141.732 (Note 4) 2,800 10.236 920 36.220	STD HYPR	3,600 141.732 (Note 4) 3,600 141.732 (Note 4) 3,600 141.732 (Note 4)	ø2.8	IP68G		
Reflective	Chemical-resistant	Cylindrical type		FT-V80Y	R4	2 m (Note 5)	STD	1,300 51.181	2,800 110.236 2,200 86.614 800 31.496 240 9.449	STD HYPR	3,600 141.732 (Note 4) 3,600 141.732 (Note 4) 3,600 141.732 (Note 4) 1,400 55.118	ø2.8	IP68G	-40 to +70 °C
							STD	590 23.228 420 16.535 200 7.874 75 2.953	STD HYPR	700 27.559 550 21.654 380 14.961	—	IP68G		
Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut. 2) The FX-550L series does not have FAST mode. 3) The sensing range of reflective type is specified for white non-glossy paper. 4) The fiber cable length practically limits the sensing range. 5) The allowable cutting range is 500 mm 19.685 in from the end that the amplifier inserted. 6) The design takes into account the environmental testing required by SEMI S2. To ensure that the final system complies with the standards, you must design and use it in accordance with relevant standards, laws, and regulations. 7) The FT-HL80Y will be discontinued at the end of September 2025.														

Tough : Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.
Bending durability : Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

LIST OF FIBERS

<One-touch connection system compatible with 4CH / 1CH flange Vacuum-resistant fiber set contents>

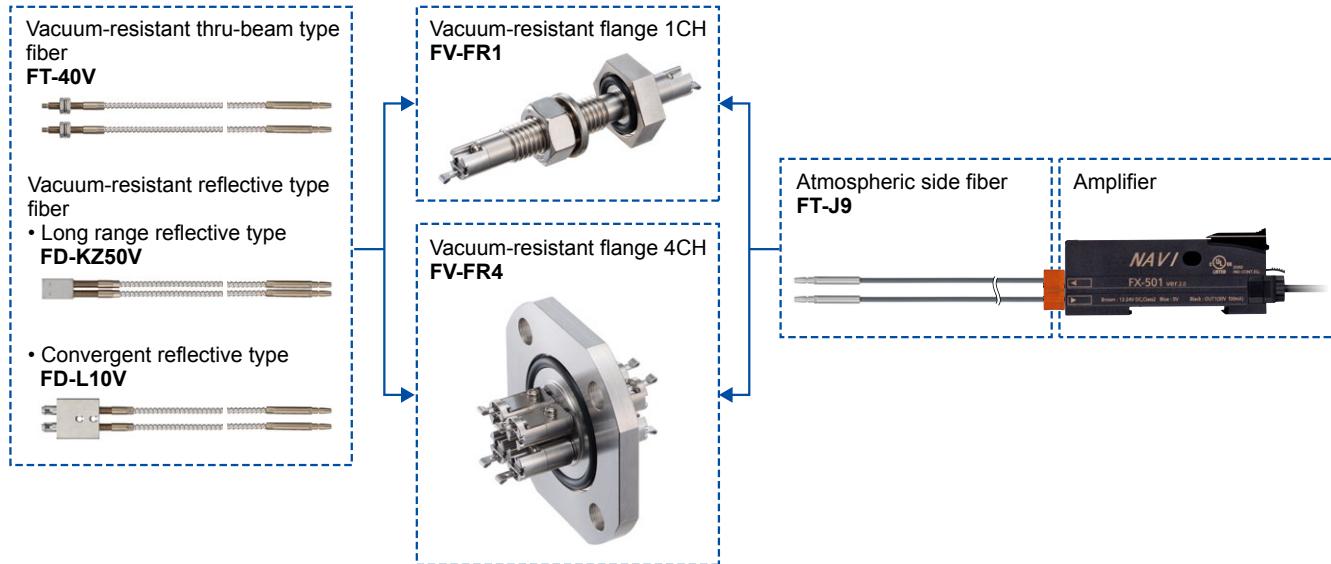

Vacuum-resistant (One-touch connection system compatible with 4CH / 1CH flange)

*Thru-beam type sensors are available as two pieces per set.

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length	Sensing range (mm in) (Note 3, 4)				Beam axis dia. (mm)	Ambient temp.	
					FX-500 series	Other modes	U-LG LONG FAST H-SP	FX-550 / FX-550L series	Other modes		
Convergent reflective	Thru-beam 300 °C, Lens mountable (FV-LE1/SV1/SV2) 	FT-40V	R25	1 m (Note 2)	STD 270 10.630	590 470 160 55	23.228 18.504 6.299 2.165	STD 400 15.748	950 620 250	37.402 24.409 9.843	ø1.3 -30 to +300 °C
					HYPR 1,000 39.370			HYPR 1,400 55.118			
	Vacuum-resistant 300 °C, Rectangular head 	FD-KZ50V		1 m (Note 2)	STD 20 to 200 0.787 to 7.874	10 to 340 0.394 to 13.386 15 to 270 0.591 to 10.630	STD 20 to 450 0.787 to 17.717	10 to 1,000 0.394 to 39.370 15 to 650 0.591 to 25.591	10 to 1,000 0.394 to 39.370 15 to 650 0.591 to 25.591 20 to 300 0.787 to 11.811		
	300 °C, Glass substrate detection 				HYPR 5 to 500 0.197 to 19.685	20 to 120 0.787 to 4.724 20 to 45 0.787 to 1.772	HYPR 5 to 1,500 0.197 to 59.055				
Convergent reflective	Long range reflective 300 °C, Glass substrate detection 	FD-L10V		3 m (Note 2)	STD 0 to 8 0 to 0.315	0 to 12 0 to 0.472 0 to 10 0 to 0.394	STD 0 to 11 0 to 0.433	0 to 19 0 to 0.748 0 to 13 0 to 0.512 0 to 7.5 0 to 0.295	0 to 27 0 to 1.063	-30 to +300 °C	
					HYPR 0 to 18 0 to 0.709	0 to 5.5 0 to 0.217 1.5 to 3 0.059 to 0.118					

Notes: 1) Atmospheric side fiber is optional and sold separately.

2) This is not a "free-cut" type. We offer only semi-custom products in which the fiber length can be specified in 100 mm **3.937 in** increments. For details, please contact our sales office.

3) The sensing range is the value for transparent glass 100 × 100 × 0.7 mm **3.937 × 3.937 × 0.028 in**.

4) **FX-550L** series does not have FAST mode.

Atmospheric side (one pair set)

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length 	Ambient temp.
Atmospheric side		Tough FT-J9 <small>Bending durability</small>	R4	 2 m (Note 1, 2)	-30 to +80 °C

Notes: 1) We offer only semi-custom products in which the fiber length can be specified in 1 m **3.280 ft** increments. For details, please contact our sales office.

2) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

LIST OF FIBERS

Tough: Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.
Bending durability: Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).


Vacuum-resistant flange

Designation	Model No.	Description																															
Vacuum-resistant flange 1CH	FV-FR1	 Atmospheric side and vacuum side are isolated. Main specifications <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Model No.</td> <td style="width: 40%; text-align: center;">FV-FR1</td> <td style="width: 30%; text-align: center;">FV-FR4</td> </tr> <tr> <td>Applicable fibers</td> <td colspan="2" style="text-align: center;">FT-40V, FD-KZ50V, FD-L10V, FT-J9</td> </tr> <tr> <td>Leakage</td> <td colspan="2" style="text-align: center;">$1.0 \times 10^{-10} \text{ Pa} \cdot \text{m}^3/\text{s}$ [He] or less (* Measured with a He detector)</td> </tr> <tr> <td>Ambient temperature</td> <td colspan="2" style="text-align: center;">-30 to +120°C -22 to +248°F (Same for storage. Up to +40 °C +104°F when humidity is high. However, no dew condensation or icing allowed.)</td> </tr> <tr> <td>Ambient humidity</td> <td colspan="2" style="text-align: center;">35 to 85% RH (Same for storage)</td> </tr> <tr> <td>Tightening torque</td> <td style="text-align: center;">Nut: 14.7 N·m or less (M14 nut)</td> <td style="text-align: center;">9.8 N·m or less (M8 screw)</td> </tr> <tr> <td>Tensile strength</td> <td colspan="2" style="text-align: center;">20 N or less (Atmospheric / vacuum side fiber joint)</td> </tr> <tr> <td>O-ring size</td> <td style="text-align: center;">V15</td> <td style="text-align: center;">V40</td> </tr> <tr> <td>Weight</td> <td colspan="2" style="text-align: center;">100 g approx.</td> </tr> <tr> <td>Material</td> <td colspan="2" style="text-align: center;">Main unit: Stainless steel (SUS303), Holding bracket: Stainless steel (SUS301), Fiber: Quartz glass, O-ring: Fluororubber</td> </tr> </table>	Model No.	FV-FR1	FV-FR4	Applicable fibers	FT-40V, FD-KZ50V, FD-L10V, FT-J9		Leakage	$1.0 \times 10^{-10} \text{ Pa} \cdot \text{m}^3/\text{s}$ [He] or less (* Measured with a He detector)		Ambient temperature	-30 to +120°C -22 to +248°F (Same for storage. Up to +40 °C +104°F when humidity is high. However, no dew condensation or icing allowed.)		Ambient humidity	35 to 85% RH (Same for storage)		Tightening torque	Nut: 14.7 N·m or less (M14 nut)	9.8 N·m or less (M8 screw)	Tensile strength	20 N or less (Atmospheric / vacuum side fiber joint)		O-ring size	V15	V40	Weight	100 g approx.		Material	Main unit: Stainless steel (SUS303), Holding bracket: Stainless steel (SUS301), Fiber: Quartz glass, O-ring: Fluororubber		
Model No.	FV-FR1	FV-FR4																															
Applicable fibers	FT-40V, FD-KZ50V, FD-L10V, FT-J9																																
Leakage	$1.0 \times 10^{-10} \text{ Pa} \cdot \text{m}^3/\text{s}$ [He] or less (* Measured with a He detector)																																
Ambient temperature	-30 to +120°C -22 to +248°F (Same for storage. Up to +40 °C +104°F when humidity is high. However, no dew condensation or icing allowed.)																																
Ambient humidity	35 to 85% RH (Same for storage)																																
Tightening torque	Nut: 14.7 N·m or less (M14 nut)	9.8 N·m or less (M8 screw)																															
Tensile strength	20 N or less (Atmospheric / vacuum side fiber joint)																																
O-ring size	V15	V40																															
Weight	100 g approx.																																
Material	Main unit: Stainless steel (SUS303), Holding bracket: Stainless steel (SUS301), Fiber: Quartz glass, O-ring: Fluororubber																																
Vacuum-resistant flange 4CH	FV-FR4	 Recommended thickness of vacuum chamber wall • For FV-FR1 : 3.0 to 40.0 mm 0.118 to 1.575 in (Note 1) • For FV-FR4 : 3.0 mm 0.118 in or more (Note 2)																															

Notes: 1) Confirm the wall thickness in advance since the **FV-FR1** cannot be installed to a vacuum chamber with a wall thickness outside the recommended thickness range.

2) If the vacuum chamber wall is too thick, the **FV-FR4** may not be able to connect to the vacuum side fiber. In that case, connect the **FV-FR4** to the vacuum side fiber before the installation.

<Vacuum-resistant fiber set contents>

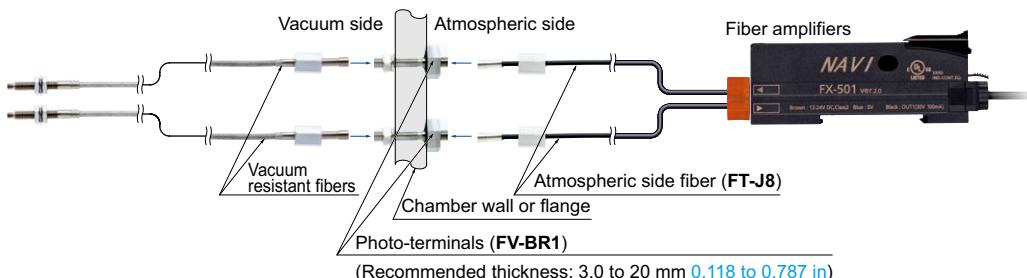

Vacuum-resistant

*Thru-beam type sensors are available as two pieces per set.

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length	Sensing range (mm in) (Note 3, 4)				Beam axis dia. (mm)	Ambient temp.	
					FX-500 series		Other modes	FX-550 / FX-550L series	Other modes		
Convergent reflective	300 °C Lens mountable (FV-LE1/SV2) M4 W19 x H5 x D27	FT-H30-M1V-S (Note 1)	R18	1 m (Note 2)	STD 270 10.630	590 23.228	STD	400 15.748	950 37.402	ø1.2	-30 to +300 °C
	300 °C, Rectangular head W9.5 x H5.2 x D15				HYPR 1,000 39.370	470 18.504	HYPR 1,400 55.118	620 24.409	620 24.409		
	300 °C, Glass substrate detection W19 x H5 x D27				STD 20 to 200 0.787 to 7.874	10 to 340 0.394 to 13.386	STD 20 to 450 0.787 to 17.717	10 to 1,000 0.394 to 39.370	15 to 650 0.591 to 25.591		
Reflective	Vacuum-resistant	FD-H30-KZ1V-S (Note 1)	R18	1 m (Note 2)	HYPR 5 to 500 0.197 to 19.685	15 to 270 0.591 to 10.630	HYPR 20 to 120 0.787 to 4.724	20 to 300 0.787 to 11.811	15 to 650 0.591 to 25.591	—	-30 to +300 °C
					STD 0 to 8 0 to 0.315	0 to 12 0 to 0.472	STD	0 to 19 0 to 0.748	0 to 13 0 to 0.512		
Thru-beam	300 °C W19 x H5 x D27	FD-H30-L32V-S (Note 1)	R18	3 m (Note 2)	HYPR 0 to 18 0 to 0.709	0 to 10 0 to 0.394	HYPR 0 to 5.5 0 to 0.217	0 to 27 0 to 1.063	0 to 7.5 0 to 0.295	—	-30 to +300 °C
					STD 0 to 5.5 0 to 0.217	0 to 1.5 0 to 0.059	HYPR 1.5 to 3 0.059 to 0.118	0 to 27 0 to 1.063	0 to 7.5 0 to 0.295		

Notes: 1) Sold as a set comprising vacuum type fiber + photo-terminal (**FV-BR1**) + fiber at atmospheric side (**FT-J8**).

2) This is not a "free-cut" type.

3) **FX-550L** series does not have FAST mode.

4) The sensing range is the value for transparent glass 100 x 100 x t0.7 mm **3.937 x 3.937 x t0.028 in**.

LIST OF FIBERS

Tough : Refer to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.

Bending durability : Refer to a fiber which possesses unbreakable bending-resistant feature (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°).

Liquid leak / Liquid detection

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length ✖: Free-cut	Description		Protection	Ambient temp.
					FX-500 series (STD mode)	FX-550 / FX-550L series (STD mode)		
Reflective type	Liquid level sensing	Heat resistant 125 °C Fluorine resin coating Ø6	FD-F8Y	Protective tube R40 Fiber R15	✖ 2 m (Note 1)	Ø6 mm Ø0.236 in Protective tube: Fluorine resin, length 1,000 mm 39.370 in (not cuttable) Liquid surface not contacted: Beam received, Liquid surface contacted: Beam not received	IP68	-40 to +125 °C
		Heat resistant 105 °C Fluorine resin coating Metal-free Ø4	FD-HF40Y (Note 2)	Protective tube R20 Fiber R10	✖ 2 m	Ø4 mm Ø0.157 in Protective tube: Fluorine resin, length 500 mm 19.685 in (cuttable) Liquid surface not contacted: Beam received, Liquid surface contacted: Beam not received	IP68G	-40 to +105 °C
	Liquid leak detection	SEMI S2 compliant (Note 3) W20 × H30 × D10	FD-F71 <small>Tough <small>Bending durability</small></small>	R4	✖ 5 m	Liquid leak detection Leak absent: Beam received, Leak present: Beam not received Compatible amplifier: FX-500 / FX-550 / FX-550L series only	IP67	-20 to +60 °C
Reflective type	Liquid level sensing	Standard W25 × H13 × D20	FD-F41	R10	✖ 2 m	Applicable pipe diameter: Outer dia. Ø6 to Ø26 mm Ø0.236 to Ø1.024 in transparent pipe [PVC (vinyl chloride), fluorine resin, polycarbonate, acrylic, glass, wall thickness 1 to 3 mm 0.039 to 0.118 in] Liquid absent: Beam received, Liquid present: Beam not received	—	-40 to +100 °C
		For 1 mm thick PFA pipe W25 × H13 × D20	FD-F4			Applicable pipe diameter: Outer dia. Ø6 to Ø26 mm Ø0.236 to Ø1.024 in transparent pipe [PFA (fluorine resin) or equivalently transparent pipe, wall thickness 1 mm 0.039 in] Liquid absent: Beam received, Liquid present: Beam not received		
	Liquid sensing	Array fiber W6.5 × H28.3 × D17	FD-FA93 <small>Tough <small>Bending durability</small></small>	R4	Protective tube R20 Fiber R2	Applicable pipe diameter: Outer dia. Ø8 mm Ø0.315 in or more transparent pipe (When used with the tying bands: Ø8 to Ø80 mm Ø0.315 to Ø3.150 in) [PFA (fluorine resin), including translucent] Liquid absent: Beam received, Liquid present: Beam not received	IP40	-40 to +70 °C
Thru-beam type	Liquid sensing	SEMI S2 compliant (Note 3) W23 × H20 × D17	FT-F93 <small>Tough <small>Bending durability</small></small>	Applicable pipe diameter: Outer dia. Ø3 to Ø10 mm Ø0.118 to Ø0.394 in transparent pipe [PFA (fluorine resin) or equivalently transparent pipe, wall thickness 0.3 to 1 mm 0.012 to 0.039 in] Liquid absent: Beam not received, Liquid present: Beam received Compatible amplifier: FX-500 / FX-550 / FX-550L series only				

Notes: 1) The allowable cutting range is 1,000 mm **39.370 in** from the end that the amplifier inserted.

2) Liquid inflow prevention joint, protective tube extension joint, fiber mounting joint is available.

3) The design takes into account the environmental testing required by SEMI S2. To ensure that the final system complies with the standards, you must design and use it in accordance with relevant standards, laws, and regulations.

FIBER OPTIONS

Lens (For thru-beam type fiber)

Designation	Model No.	Description																																																																																																																				
For thru-beam type fiber	FX-LE1		<p>Increases the sensing range by 5 times or more. • Ambient temperature: -60 to +350 °C -76 to +662 °F (Note 4) • Beam dia: ø3.6 mm ø0.142 in Sensing range (mm in) [Lens on both sides] (Note 3)</p> <table border="1"> <thead> <tr> <th rowspan="2">Fiber \ Mode</th> <th colspan="6">FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)</th> </tr> <tr> <th>HYPR</th> <th>U-LG</th> <th>LONG</th> <th>STD</th> <th>FAST</th> <th>H-SP</th> </tr> </thead> <tbody> <tr> <td>FT-43</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>1,600 62.992</td></tr> <tr> <td>FT-42</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>2,200 86.614</td></tr> <tr> <td>FT-42W</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>—</td></tr> <tr> <td>FT-45X</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,500 59.055</td></tr> <tr> <td>FT-R40</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>1,900 74.803</td></tr> <tr> <td>FT-R43</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>1,900 74.803</td><td>—</td></tr> <tr> <td>FT-R44Y</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>1,900 74.803</td><td>—</td></tr> <tr> <td>FT-H35-M2</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>1,400 55.118</td></tr> <tr> <td>FT-H20W-M1</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>850 33.465</td></tr> <tr> <td>FT-H20-M1</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,200 47.244</td></tr> <tr> <td>FT-H20-J50-S</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,500 137.795</td><td>2,000 78.740</td><td>1,600 62.992</td><td>500 19.685</td></tr> <tr> <td>FT-H20-J30-S</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>—</td></tr> <tr> <td>FT-H20-J20-S</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>—</td></tr> </tbody> </table>	Fiber \ Mode	FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)						HYPR	U-LG	LONG	STD	FAST	H-SP	FT-43	3,600 141.732 (Note 2)	1,600 62.992	FT-42	3,600 141.732 (Note 2)	2,200 86.614	FT-42W	3,600 141.732 (Note 2)	—	FT-45X	1,600 62.992 (Note 2)	1,500 59.055	FT-R40	3,600 141.732 (Note 2)	1,900 74.803	FT-R43	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,900 74.803	—	FT-R44Y	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,900 74.803	—	FT-H35-M2	3,600 141.732 (Note 2)	1,400 55.118	FT-H20W-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	850 33.465	FT-H20-M1	1,600 62.992 (Note 2)	1,200 47.244	FT-H20-J50-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,500 137.795	2,000 78.740	1,600 62.992	500 19.685	FT-H20-J30-S	3,600 141.732 (Note 2)	—	FT-H20-J20-S	3,600 141.732 (Note 2)	—																																															
Fiber \ Mode	FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)																																																																																																																					
	HYPR	U-LG	LONG	STD	FAST	H-SP																																																																																																																
FT-43	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,600 62.992																																																																																																																
FT-42	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	2,200 86.614																																																																																																																
FT-42W	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	—																																																																																																																
FT-45X	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,500 59.055																																																																																																																
FT-R40	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,900 74.803																																																																																																																
FT-R43	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,900 74.803	—																																																																																																																
FT-R44Y	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,900 74.803	—																																																																																																																
FT-H35-M2	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,400 55.118																																																																																																																
FT-H20W-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	850 33.465																																																																																																																
FT-H20-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,200 47.244																																																																																																																
FT-H20-J50-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,500 137.795	2,000 78.740	1,600 62.992	500 19.685																																																																																																																
FT-H20-J30-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	—																																																																																																																
FT-H20-J20-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	—																																																																																																																
<p>Tremendously increases the sensing range with large diameter lenses. • Ambient temperature: -60 to +350 °C -76 to +662 °F (Note 4) • Beam dia: ø9.8 mm ø0.386 in Sensing range (mm in) [Lens on both sides] (Note 3)</p> <table border="1"> <thead> <tr> <th rowspan="2">Fiber \ Mode</th> <th colspan="6">FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)</th> </tr> <tr> <th>HYPR</th> <th>U-LG</th> <th>LONG</th> <th>STD</th> <th>FAST</th> <th>H-SP</th> </tr> </thead> <tbody> <tr> <td>FT-43</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td></tr> <tr> <td>FT-42</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>—</td></tr> <tr> <td>FT-42W</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>—</td></tr> <tr> <td>FT-45X</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td></tr> <tr> <td>FT-R40</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td></tr> <tr> <td>FT-R41W</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td></tr> <tr> <td>FT-R43</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>—</td></tr> <tr> <td>FT-R44Y</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>—</td></tr> <tr> <td>FT-H35-M2</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td></tr> <tr> <td>FT-H20W-M1</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td></tr> <tr> <td>FT-H20-M1</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>1,600 62.992 (Note 2)</td><td>—</td></tr> <tr> <td>FT-H13-FM2</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td></tr> <tr> <td>FT-H20-J50-S</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td></tr> <tr> <td>FT-H20-J30-S</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>—</td></tr> <tr> <td>FT-H20-J20-S</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>3,600 141.732 (Note 2)</td><td>—</td></tr> </tbody> </table>	Fiber \ Mode	FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)						HYPR	U-LG	LONG	STD	FAST	H-SP	FT-43	3,600 141.732 (Note 2)	FT-42	3,600 141.732 (Note 2)	—	FT-42W	3,600 141.732 (Note 2)	—	FT-45X	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	FT-R40	3,600 141.732 (Note 2)	FT-R41W	3,600 141.732 (Note 2)	FT-R43	3,600 141.732 (Note 2)	—	FT-R44Y	3,600 141.732 (Note 2)	—	FT-H35-M2	3,600 141.732 (Note 2)	FT-H20W-M1	1,600 62.992 (Note 2)	FT-H20-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	—	FT-H13-FM2	3,600 141.732 (Note 2)	FT-H20-J50-S	3,600 141.732 (Note 2)	FT-H20-J30-S	3,600 141.732 (Note 2)	—	FT-H20-J20-S	3,600 141.732 (Note 2)	—																																																											
Fiber \ Mode		FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)																																																																																																																				
	HYPR	U-LG	LONG	STD	FAST	H-SP																																																																																																																
FT-43	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)																																																																																																																
FT-42	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	—																																																																																																																
FT-42W	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	—																																																																																																																
FT-45X	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)																																																																																																																
FT-R40	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)																																																																																																																
FT-R41W	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)																																																																																																																
FT-R43	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	—																																																																																																																
FT-R44Y	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	—																																																																																																																
FT-H35-M2	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)																																																																																																																
FT-H20W-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)																																																																																																																
FT-H20-M1	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	—																																																																																																																
FT-H13-FM2	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)																																																																																																																
FT-H20-J50-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)																																																																																																																
FT-H20-J30-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	—																																																																																																																
FT-H20-J20-S	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	—																																																																																																																

Notes: 1) Be careful sure to use it only after you have adjusted it sufficiently when installing the thru-beam type fiber equipped with the expansion lens, as the beam envelope becomes narrow and alignment is difficult.

2) The fiber cable length practically limits the sensing range.

3) FX-550L series does not have FAST mode.

4) Refer to [LIST OF FIBERS](#) (p.25~) for the ambient temperature of fibers to be used in combination.

FIBER OPTIONS

Lens (For thru-beam type fiber)

Designation	Model No.	Description						
For thru-beam type fiber	Side-view lens	<p>Beam axis is bent by 90°. • Ambient temperature: -60 to +300 °C -76 to +572 °F (Note 1) • Beam dia: ø2.8 mm ø0.110 in Sensing range (mm in) [Lens on both sides] (Note 3)</p>						
FX-SV1								
			Amplifier	FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)				
Fiber Mode		HYPR	U-LG	LONG	STD	FAST	H-SP	
FT-43	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	3,400 133.858 3,600 141.732 (Note 2)	2,600 102.362 3,600 141.732 (Note 2)	1,700 66.929 2,300 90.551	970 38.189 1,400 55.118	310 12.205 —		
FT-42	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	2,100 82.677 2,800 110.236	1,150 45.276 1,700 66.929	370 14.567 —		
FT-42W	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	3,500 137.795 3,600 141.732 (Note 2)	2,700 106.299 3,600 141.732 (Note 2)	1,800 70.866 2,300 90.551	990 38.976 1,400 55.118	320 12.598 —		
FT-45X	1,600 62.992 (Note 2) 1,600 62.992 (Note 2)	1,600 62.992 (Note 2) 1,600 62.992 (Note 2)	1,600 62.992 (Note 2) 1,600 62.992 (Note 2)	1,400 55.118 1,600 62.992 (Note 2)	800 31.496 1,600 62.992 (Note 2)	210 8.268 —		
FT-R43	3,200 125.984 3,600 141.732 (Note 2)	1,800 70.866 3,600 141.732 (Note 2)	1,300 51.181 2,700 106.299	950 37.402 1,900 74.803	510 20.079 1,200 47.244	160 6.299 —		
FT-R44Y	3,200 125.984 3,600 141.732 (Note 2)	1,800 70.866 3,600 141.732 (Note 2)	1,300 51.181 3,200 125.984	950 37.402 2,200 86.614	510 20.079 1,400 55.118	160 6.299 —		
FT-H35-M2	3,500 137.795 3,600 141.732 (Note 2)	1,600 62.992 (Note 2) 2,800 110.236	1,200 47.244 1,800 70.866	780 30.709 1,300 51.181	500 19.685 750 29.528	150 5.906 —		
FT-H20W-M1	1,600 62.992 (Note 2) 1,600 62.992 (Note 2)	1,600 62.992 (Note 2) 1,600 62.992 (Note 2)	1,500 59.055 1,600 62.992 (Note 2)	950 37.402 1,250 49.213	560 22.047 690 27.165	190 7.480 —		
FT-H20-M1	1,600 62.992 (Note 2) 1,600 62.992 (Note 2)	1,600 62.992 (Note 2) 1,600 62.992 (Note 2)	1,300 51.181 1,600 62.992 (Note 2)	780 30.709 1,600 62.992 (Note 2)	500 19.685 800 31.496	150 5.906 —		
FT-H20-J50-S FT-H20-J30-S FT-H20-J20-S	1,600 62.992 (Note 2) 3,600 141.732 (Note 2)	960 37.795 2,400 94.488	740 29.134 1,500 59.055	450 17.717 1,100 43.307	290 11.417 680 26.771	80 3.150 —		

Notes: 1) Refer to **LIST OF FIBERS** (p.25~) for the ambient temperature of fibers to be used in combination.

2) The fiber cable length practically limits the sensing range.

3) **FX-550L** series does not have FAST mode.

FIBER OPTIONS

Vacuum-resistant lens (For thru-beam type fiber)

Designation		Model No.	Description																																														
For thru-beam type fiber	Vacuum-resistant expansion lens (Note 1)	FV-LE1		<p>Increases the sensing range 4 times or more.</p> <ul style="list-style-type: none"> Ambient temperature: -60 to +350 °C -76 to +662 °F (Note 6) Beam axis dia: ø3.6 mm ø0.142 in <p>Sensing range (mm in) [Lens on both sides] (Note 3, 4, 5)</p>																																													
				<table border="1"> <thead> <tr> <th rowspan="2">Fiber Mode</th> <th colspan="6">FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)</th> </tr> <tr> <th>HYPR</th> <th>U-LG</th> <th>LONG</th> <th>STD</th> <th>FAST</th> <th>H-SP</th> </tr> </thead> <tbody> <tr> <td>FT-40V</td> <td>1,800 (Note 2) 70.866</td> <td>1,800 (Note 2) 70.866</td> <td>1,800 (Note 2) 70.866</td> <td>1,500 59.055</td> <td>900 35.433</td> <td>370 14.567</td> </tr> <tr> <td></td> <td>1,800 (Note 2) 70.866</td> <td>1,800 (Note 2) 70.866</td> <td>1,800 (Note 2) 70.866</td> <td>1,650 64.961</td> <td>—</td> <td>—</td> </tr> <tr> <td>FT-H30-M1V-S</td> <td>3,600 (Note 2) 141.732</td> <td>3,600 (Note 2) 141.732</td> <td>3,400 133.858</td> <td>1,500 59.055</td> <td>900 35.433</td> <td>370 14.567</td> </tr> <tr> <td></td> <td>3,600 (Note 2) 141.732</td> <td>3,600 (Note 2) 141.732</td> <td>3,600 (Note 2) 141.732</td> <td>2,500 98.425</td> <td>1,650 64.961</td> <td>—</td> </tr> </tbody> </table>				Fiber Mode	FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)						HYPR	U-LG	LONG	STD	FAST	H-SP	FT-40V	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,500 59.055	900 35.433	370 14.567		1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,650 64.961	—	—	FT-H30-M1V-S	3,600 (Note 2) 141.732	3,600 (Note 2) 141.732	3,400 133.858	1,500 59.055	900 35.433	370 14.567		3,600 (Note 2) 141.732	3,600 (Note 2) 141.732	3,600 (Note 2) 141.732	2,500 98.425	1,650 64.961	—	
Fiber Mode	FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)																																																
	HYPR	U-LG	LONG	STD	FAST	H-SP																																											
FT-40V	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,500 59.055	900 35.433	370 14.567																																											
	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,650 64.961	—	—																																											
FT-H30-M1V-S	3,600 (Note 2) 141.732	3,600 (Note 2) 141.732	3,400 133.858	1,500 59.055	900 35.433	370 14.567																																											
	3,600 (Note 2) 141.732	3,600 (Note 2) 141.732	3,600 (Note 2) 141.732	2,500 98.425	1,650 64.961	—																																											
<p>Beam axis is bent by 90°.</p> <ul style="list-style-type: none"> Ambient temperature: -30 to +300 °C -22 to +572 °F (Note 6) Beam axis dia: ø3 mm ø0.118 in <p>Sensing range (mm in) [Lens on both sides] (Note 3, 4, 5)</p>																																																	
	Vacuum-resistant compact side-view lens (Note 1)	FV-SV1		<table border="1"> <thead> <tr> <th rowspan="2">Fiber Mode</th> <th colspan="6">FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)</th> </tr> <tr> <th>HYPR</th> <th>U-LG</th> <th>LONG</th> <th>STD</th> <th>FAST</th> <th>H-SP</th> </tr> </thead> <tbody> <tr> <td>FT-40V</td> <td>1,800 (Note 2) 70.866</td> <td>900 35.433</td> <td>700 27.559</td> <td>450 17.717</td> <td>290 11.417</td> <td>90 3.543</td> </tr> <tr> <td></td> <td>1,800 (Note 2) 70.866</td> <td>1,800 (Note 2) 70.866</td> <td>1,050 41.339</td> <td>720 28.346</td> <td>430 16.929</td> <td>—</td> </tr> <tr> <td>FT-H30-M1V-S</td> <td>1,800 70.866</td> <td>900 35.433</td> <td>700 27.559</td> <td>450 17.717</td> <td>290 11.417</td> <td>90 3.543</td> </tr> <tr> <td></td> <td>2,300 90.551</td> <td>1,800 70.866</td> <td>1,050 41.339</td> <td>720 28.346</td> <td>430 16.929</td> <td>—</td> </tr> </tbody> </table>					Fiber Mode	FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)						HYPR	U-LG	LONG	STD	FAST	H-SP	FT-40V	1,800 (Note 2) 70.866	900 35.433	700 27.559	450 17.717	290 11.417	90 3.543		1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,050 41.339	720 28.346	430 16.929	—	FT-H30-M1V-S	1,800 70.866	900 35.433	700 27.559	450 17.717	290 11.417	90 3.543		2,300 90.551	1,800 70.866	1,050 41.339	720 28.346	430 16.929	—
Fiber Mode	FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)																																																
	HYPR	U-LG	LONG	STD	FAST	H-SP																																											
FT-40V	1,800 (Note 2) 70.866	900 35.433	700 27.559	450 17.717	290 11.417	90 3.543																																											
	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,050 41.339	720 28.346	430 16.929	—																																											
FT-H30-M1V-S	1,800 70.866	900 35.433	700 27.559	450 17.717	290 11.417	90 3.543																																											
	2,300 90.551	1,800 70.866	1,050 41.339	720 28.346	430 16.929	—																																											
<p>Beam axis is bent by 90°.</p> <ul style="list-style-type: none"> Ambient temperature: -60 to +300 °C -76 to +572 °F (Note 6) Beam axis dia: ø3.7 mm ø0.146 in <p>Sensing range (mm in) [Lens on both sides] (Note 3, 4, 5)</p>																																																	
<table border="1"> <thead> <tr> <th rowspan="2">Fiber Mode</th> <th colspan="6">FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)</th> </tr> <tr> <th>HYPR</th> <th>U-LG</th> <th>LONG</th> <th>STD</th> <th>FAST</th> <th>H-SP</th> </tr> </thead> <tbody> <tr> <td>FT-40V</td> <td>1,800 (Note 2) 70.866</td> <td>1,800 (Note 2) 70.866</td> <td>1,800 (Note 2) 70.866</td> <td>1,500 59.055</td> <td>900 35.433</td> <td>370 14.567</td> </tr> <tr> <td></td> <td>1,800 (Note 2) 70.866</td> <td>1,800 (Note 2) 70.866</td> <td>1,800 (Note 2) 70.866</td> <td>1,800 (Note 2) 70.866</td> <td>1,100 43.307</td> <td>—</td> </tr> <tr> <td>FT-H30-M1V-S</td> <td>3,600 141.732</td> <td>3,600 141.732</td> <td>3,400 133.858</td> <td>1,500 59.055</td> <td>900 35.433</td> <td>370 14.567</td> </tr> <tr> <td></td> <td>3,600 141.732</td> <td>3,600 141.732</td> <td>3,600 141.732</td> <td>1,800 70.866</td> <td>1,100 43.307</td> <td>—</td> </tr> </tbody> </table>					Fiber Mode	FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)						HYPR	U-LG	LONG	STD	FAST	H-SP	FT-40V	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,500 59.055	900 35.433	370 14.567		1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,100 43.307	—	FT-H30-M1V-S	3,600 141.732	3,600 141.732	3,400 133.858	1,500 59.055	900 35.433	370 14.567		3,600 141.732	3,600 141.732	3,600 141.732	1,800 70.866	1,100 43.307	—				
Fiber Mode	FX-500 series (Upper value) FX-550 / FX-550L series (Lower value)																																																
	HYPR	U-LG	LONG	STD	FAST	H-SP																																											
FT-40V	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,500 59.055	900 35.433	370 14.567																																											
	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,800 (Note 2) 70.866	1,100 43.307	—																																											
FT-H30-M1V-S	3,600 141.732	3,600 141.732	3,400 133.858	1,500 59.055	900 35.433	370 14.567																																											
	3,600 141.732	3,600 141.732	3,600 141.732	1,800 70.866	1,100 43.307	—																																											

Notes: 1) Be careful when installing the thru-beam type fiber equipped with the lens, as the beam envelope becomes narrow and alignment is difficult.

2) The fiber cable length practically limits the sensing range.

3) FX-550L series does not have FAST mode.




4) The fiber cable length for the FT-40V is 1 m 3.281 ft. The sensing ranges take into account the length of the FT-J9 atmospheric side fiber.

5) The fiber cable length for the FT-H30-M1V-S is 1 m 3.281 ft. The sensing ranges in HYPR, U-LG and LONG of FX-500 / FX-550 / FX-550L series are specified considering the length of the FT-J8 atmospheric side fiber.

6) Refer to [LIST OF FIBERS](#) (p.25~) for the ambient temperature of fibers to be used in combination.

FIBER OPTIONS




Lens (For reflective type fiber)

Designation	Model No.	Description																		
For reflective type fiber	Finest spot lens	 <p>Extremely fine spot of $\varnothing 0.1$ mm $\varnothing 0.004$ in approx. achieved.</p> <ul style="list-style-type: none"> Applicable fibers: FD-R33EG, FD-EG31, FD-R34EG, FD-R32EG, FD-EG30, FD-R31G, FD-42G, FD-42GW, FD-32G, FD-32GX Ambient temperature: -55 to +70 °C +67 to +158 °F (Note) 	Sensing range for FX-500 / FX-550 / FX-550L series																	
			<table border="1"> <thead> <tr> <th>Fiber model No.</th> <th>Distance to focal point</th> <th>Spot diameter</th> </tr> </thead> <tbody> <tr> <td>FD-R33EG</td> <td rowspan="6" style="text-align: center;">7 ± 0.5 mm 0.276 ± 0.020 in</td> <td>$\varnothing 0.1$ mm approx. $\varnothing 0.004$ in approx.</td> </tr> <tr> <td>FD-EG31</td> <td>$\varnothing 0.15$ mm approx. $\varnothing 0.006$ in approx.</td> </tr> <tr> <td>FD-R34EG</td> <td>$\varnothing 0.2$ mm approx. $\varnothing 0.008$ in approx.</td> </tr> <tr> <td>FD-R32EG</td> <td>$\varnothing 0.4$ mm approx. $\varnothing 0.016$ in approx.</td> </tr> <tr> <td>FD-EG30</td> <td></td> </tr> <tr> <td>FD-R31G</td> <td></td> </tr> <tr> <td>FD-42G/42GW</td> <td></td> </tr> <tr> <td>FD-32G/32GX</td> <td></td> </tr> </tbody> </table>	Fiber model No.	Distance to focal point	Spot diameter	FD-R33EG	7 ± 0.5 mm 0.276 ± 0.020 in	$\varnothing 0.1$ mm approx. $\varnothing 0.004$ in approx.	FD-EG31	$\varnothing 0.15$ mm approx. $\varnothing 0.006$ in approx.	FD-R34EG	$\varnothing 0.2$ mm approx. $\varnothing 0.008$ in approx.	FD-R32EG	$\varnothing 0.4$ mm approx. $\varnothing 0.016$ in approx.	FD-EG30		FD-R31G		FD-42G/42GW
Fiber model No.	Distance to focal point	Spot diameter																		
FD-R33EG	7 ± 0.5 mm 0.276 ± 0.020 in	$\varnothing 0.1$ mm approx. $\varnothing 0.004$ in approx.																		
FD-EG31		$\varnothing 0.15$ mm approx. $\varnothing 0.006$ in approx.																		
FD-R34EG		$\varnothing 0.2$ mm approx. $\varnothing 0.008$ in approx.																		
FD-R32EG		$\varnothing 0.4$ mm approx. $\varnothing 0.016$ in approx.																		
FD-EG30																				
FD-R31G																				
FD-42G/42GW																				
FD-32G/32GX																				
Sensing range for FX-500 / FX-550 / FX-550L series																				
FX-MR6	 <p>Extremely fine spot of $\varnothing 0.1$ mm $\varnothing 0.004$ in approx. achieved.</p> <ul style="list-style-type: none"> Applicable fibers: FD-R33EG, FD-EG31, FD-R34EG, FD-R32EG, FD-EG30, FD-R31G, FD-42G, FD-42GW, FD-32G, FD-32GX Ambient temperature: -20 to +60 °C -4 to +140 °F (Note) 	Sensing range for FX-500 / FX-550 / FX-550L series																		
		<table border="1"> <thead> <tr> <th>Fiber model No.</th> <th>Distance to focal point</th> <th>Spot diameter</th> </tr> </thead> <tbody> <tr> <td>FD-R33EG</td> <td rowspan="6" style="text-align: center;">7 ± 0.5 mm 0.276 ± 0.020 in</td> <td>$\varnothing 0.1$ mm approx. $\varnothing 0.004$ in approx.</td> </tr> <tr> <td>FD-EG31</td> <td>$\varnothing 0.15$ mm approx. $\varnothing 0.006$ in approx.</td> </tr> <tr> <td>FD-R34EG</td> <td>$\varnothing 0.2$ mm approx. $\varnothing 0.008$ in approx.</td> </tr> <tr> <td>FD-R32EG</td> <td>$\varnothing 0.4$ mm approx. $\varnothing 0.016$ in approx.</td> </tr> <tr> <td>FD-EG30</td> <td></td> </tr> <tr> <td>FD-R31G</td> <td></td> </tr> <tr> <td>FD-42G/42GW</td> <td></td> </tr> <tr> <td>FD-32G/32GX</td> <td></td> </tr> </tbody> </table>	Fiber model No.	Distance to focal point	Spot diameter	FD-R33EG	7 ± 0.5 mm 0.276 ± 0.020 in	$\varnothing 0.1$ mm approx. $\varnothing 0.004$ in approx.	FD-EG31	$\varnothing 0.15$ mm approx. $\varnothing 0.006$ in approx.	FD-R34EG	$\varnothing 0.2$ mm approx. $\varnothing 0.008$ in approx.	FD-R32EG	$\varnothing 0.4$ mm approx. $\varnothing 0.016$ in approx.	FD-EG30		FD-R31G		FD-42G/42GW	
Fiber model No.	Distance to focal point	Spot diameter																		
FD-R33EG	7 ± 0.5 mm 0.276 ± 0.020 in	$\varnothing 0.1$ mm approx. $\varnothing 0.004$ in approx.																		
FD-EG31		$\varnothing 0.15$ mm approx. $\varnothing 0.006$ in approx.																		
FD-R34EG		$\varnothing 0.2$ mm approx. $\varnothing 0.008$ in approx.																		
FD-R32EG		$\varnothing 0.4$ mm approx. $\varnothing 0.016$ in approx.																		
FD-EG30																				
FD-R31G																				
FD-42G/42GW																				
FD-32G/32GX																				
Sensing range for FX-500 / FX-550 / FX-550L series																				
FX-MR3	 <p>Extremely fine spot of $\varnothing 0.15$ mm $\varnothing 0.006$ in approx. achieved.</p> <ul style="list-style-type: none"> Applicable fibers: FD-R33EG, FD-EG31, FD-R34EG, FD-R32EG, FD-EG30, FD-R31G, FD-42G, FD-42GW, FD-32G, FD-32GX Ambient temperature: -40 to +70 °C -40 to +158 °F (Note) 	Sensing range for FX-500 / FX-550 / FX-550L series																		
		<table border="1"> <thead> <tr> <th>Fiber model No.</th> <th>Distance to focal point</th> <th>Spot diameter</th> </tr> </thead> <tbody> <tr> <td>FD-R33EG</td> <td rowspan="6" style="text-align: center;">7.5 ± 0.5 mm 0.295 ± 0.020 in</td> <td>$\varnothing 0.15$ mm approx. $\varnothing 0.006$ in approx.</td> </tr> <tr> <td>FD-EG31</td> <td>$\varnothing 0.2$ mm approx. $\varnothing 0.008$ in approx.</td> </tr> <tr> <td>FD-R34EG</td> <td>$\varnothing 0.3$ mm approx. $\varnothing 0.012$ in approx.</td> </tr> <tr> <td>FD-R32EG</td> <td>$\varnothing 0.5$ mm approx. $\varnothing 0.020$ in approx.</td> </tr> <tr> <td>FD-EG30</td> <td></td> </tr> <tr> <td>FD-R31G</td> <td></td> </tr> <tr> <td>FD-42G/42GW</td> <td></td> </tr> <tr> <td>FD-32G/32GX</td> <td></td> </tr> </tbody> </table>	Fiber model No.	Distance to focal point	Spot diameter	FD-R33EG	7.5 ± 0.5 mm 0.295 ± 0.020 in	$\varnothing 0.15$ mm approx. $\varnothing 0.006$ in approx.	FD-EG31	$\varnothing 0.2$ mm approx. $\varnothing 0.008$ in approx.	FD-R34EG	$\varnothing 0.3$ mm approx. $\varnothing 0.012$ in approx.	FD-R32EG	$\varnothing 0.5$ mm approx. $\varnothing 0.020$ in approx.	FD-EG30		FD-R31G		FD-42G/42GW	
Fiber model No.	Distance to focal point	Spot diameter																		
FD-R33EG	7.5 ± 0.5 mm 0.295 ± 0.020 in	$\varnothing 0.15$ mm approx. $\varnothing 0.006$ in approx.																		
FD-EG31		$\varnothing 0.2$ mm approx. $\varnothing 0.008$ in approx.																		
FD-R34EG		$\varnothing 0.3$ mm approx. $\varnothing 0.012$ in approx.																		
FD-R32EG		$\varnothing 0.5$ mm approx. $\varnothing 0.020$ in approx.																		
FD-EG30																				
FD-R31G																				
FD-42G/42GW																				
FD-32G/32GX																				
Sensing range for FX-500 / FX-550 / FX-550L series																				
Zoom lens	FX-MR8	 <p>The spot diameter is adjustable according to how much the fiber is screwed in.</p> <ul style="list-style-type: none"> Applicable fibers: FD-R33EG, FD-EG31, FD-R34EG, FD-R32EG, FD-EG30, FD-R31G, FD-32G, FD-32GX Ambient temperature: -55 to +70 °C +67 to +158 °F (Note) 	Sensing range for FX-500 / FX-550 / FX-550L series																	
			<table border="1"> <thead> <tr> <th>Fiber model No.</th> <th>Sensing range</th> <th>Spot diameter</th> </tr> </thead> <tbody> <tr> <td>FD-R33EG</td> <td rowspan="6" style="text-align: center;">10 to 30 mm 0.394 to 1.181 in</td> <td>$\varnothing 0.4$ to $\varnothing 2.0$ mm approx. $\varnothing 0.016$ to $\varnothing 0.079$ in approx.</td> </tr> <tr> <td>FD-EG31</td> <td>$\varnothing 0.4$ to $\varnothing 2.2$ mm approx. $\varnothing 0.016$ to $\varnothing 0.087$ in approx.</td> </tr> <tr> <td>FD-R34EG</td> <td>$\varnothing 0.5$ to $\varnothing 2.5$ mm approx. $\varnothing 0.020$ to $\varnothing 0.098$ in approx.</td> </tr> <tr> <td>FD-R32EG</td> <td>$\varnothing 0.8$ to $\varnothing 3.5$ mm approx. $\varnothing 0.031$ to $\varnothing 0.138$ in approx.</td> </tr> <tr> <td>FD-EG30</td> <td></td> </tr> <tr> <td>FD-R31G</td> <td></td> </tr> <tr> <td>FD-32G/32GX</td> <td></td> </tr> </tbody> </table>	Fiber model No.	Sensing range	Spot diameter	FD-R33EG	10 to 30 mm 0.394 to 1.181 in	$\varnothing 0.4$ to $\varnothing 2.0$ mm approx. $\varnothing 0.016$ to $\varnothing 0.079$ in approx.	FD-EG31	$\varnothing 0.4$ to $\varnothing 2.2$ mm approx. $\varnothing 0.016$ to $\varnothing 0.087$ in approx.	FD-R34EG	$\varnothing 0.5$ to $\varnothing 2.5$ mm approx. $\varnothing 0.020$ to $\varnothing 0.098$ in approx.	FD-R32EG	$\varnothing 0.8$ to $\varnothing 3.5$ mm approx. $\varnothing 0.031$ to $\varnothing 0.138$ in approx.	FD-EG30		FD-R31G		FD-32G/32GX
Fiber model No.	Sensing range	Spot diameter																		
FD-R33EG	10 to 30 mm 0.394 to 1.181 in	$\varnothing 0.4$ to $\varnothing 2.0$ mm approx. $\varnothing 0.016$ to $\varnothing 0.079$ in approx.																		
FD-EG31		$\varnothing 0.4$ to $\varnothing 2.2$ mm approx. $\varnothing 0.016$ to $\varnothing 0.087$ in approx.																		
FD-R34EG		$\varnothing 0.5$ to $\varnothing 2.5$ mm approx. $\varnothing 0.020$ to $\varnothing 0.098$ in approx.																		
FD-R32EG		$\varnothing 0.8$ to $\varnothing 3.5$ mm approx. $\varnothing 0.031$ to $\varnothing 0.138$ in approx.																		
FD-EG30																				
FD-R31G																				
FD-32G/32GX																				

Note: Refer to **LIST OF FIBERS** (p.25~) for the ambient temperature of fibers to be used in combination.

FIBER OPTIONS

Lens (For reflective type fiber)

Designation	Model No.	Description																									
For reflective type fiber	Parallel light lens FX-MR9		<p>Long-range parallel light</p> <ul style="list-style-type: none"> Applicable fibers: FD-R33EG, FD-EG31, FD-R34EG, FD-R32EG, FD-EG30, FD-R31G, FD-42G, FD-42GW, FD-32G, FD-32GX Ambient temperature: -55 to +70 °C +67 to +158 °F (Note) 																								
			<p>Sensing range for FX-500 / FX-550 / FX-550L series</p> <table border="1"> <thead> <tr> <th>Fiber model No.</th> <th>Sensing range</th> <th>Spot diameter</th> </tr> </thead> <tbody> <tr> <td>FD-R33EG</td> <td></td> <td></td> </tr> <tr> <td>FD-EG31</td> <td></td> <td></td> </tr> <tr> <td>FD-R34EG</td> <td></td> <td></td> </tr> <tr> <td>FD-R32EG</td> <td>0 to 30 mm</td> <td>ø4.0 mm approx.</td> </tr> <tr> <td>FD-EG30</td> <td>0.394 to 1.181 in</td> <td>ø0.157 in approx.</td> </tr> <tr> <td>FD-R31G</td> <td></td> <td></td> </tr> <tr> <td>FD-42G/42GW</td> <td></td> <td></td> </tr> <tr> <td>FD-32G/32GX</td> <td></td> <td></td> </tr> </tbody> </table>	Fiber model No.	Sensing range	Spot diameter	FD-R33EG			FD-EG31			FD-R34EG			FD-R32EG	0 to 30 mm	ø4.0 mm approx.	FD-EG30	0.394 to 1.181 in	ø0.157 in approx.	FD-R31G			FD-42G/42GW		
Fiber model No.	Sensing range	Spot diameter																									
FD-R33EG																											
FD-EG31																											
FD-R34EG																											
FD-R32EG	0 to 30 mm	ø4.0 mm approx.																									
FD-EG30	0.394 to 1.181 in	ø0.157 in approx.																									
FD-R31G																											
FD-42G/42GW																											
FD-32G/32GX																											
Pinpoint spot lens FX-MR1		<p>Pinpoint spot of ø0.5 mm ø0.020 in. Enables detection of minute objects or small marks.</p> <ul style="list-style-type: none"> Distance to focal point: 6 ± 1 mm 0.236 ± 0.039 in Applicable fibers: FD-42G, FD-42GW Ambient temperature: -40 to +70 °C -40 to +158 °F (Note) 																									
Zoom lens FX-MR2		<p>The spot diameter is adjustable from ø0.7 to ø2 mm ø0.028 to ø0.079 in according to how much the fiber is screwed in.</p> <ul style="list-style-type: none"> Applicable fibers: FD-42G, FD-42GW Ambient temperature: -40 to +70 °C -40 to +158 °F (Note) Accessory: MS-EX3 (mounting bracket) 																									
Zoom lens (side-view type)	FX-MR5		<p>FX-MR2 is converted into a side-view type and can be mounted in a very small space.</p> <ul style="list-style-type: none"> Applicable fibers: FD-42G, FD-42GW Ambient temperature: -40 to +60 °C -40 to +140 °F (Note) 																								
			<p>Sensing range for FX-500 / FX-550 / FX-550L series</p> <table border="1"> <thead> <tr> <th>Screw-in depth</th> <th>Distance to focal point</th> <th>Spot diameter</th> </tr> </thead> <tbody> <tr> <td>8 mm 0.315 in</td> <td>13 mm approx. 0.512 in approx.</td> <td>ø0.5 mm approx. ø0.020 in approx.</td> </tr> <tr> <td>10 mm 0.394 in</td> <td>15 mm approx. 0.591 in approx.</td> <td>ø0.8 mm approx. ø0.031 in approx.</td> </tr> <tr> <td>14 mm 0.551 in</td> <td>30 mm approx. 1.181 in approx.</td> <td>ø3.0 mm approx. ø0.118 in approx.</td> </tr> </tbody> </table>	Screw-in depth	Distance to focal point	Spot diameter	8 mm 0.315 in	13 mm approx. 0.512 in approx.	ø0.5 mm approx. ø0.020 in approx.	10 mm 0.394 in	15 mm approx. 0.591 in approx.	ø0.8 mm approx. ø0.031 in approx.	14 mm 0.551 in	30 mm approx. 1.181 in approx.	ø3.0 mm approx. ø0.118 in approx.												
Screw-in depth	Distance to focal point	Spot diameter																									
8 mm 0.315 in	13 mm approx. 0.512 in approx.	ø0.5 mm approx. ø0.020 in approx.																									
10 mm 0.394 in	15 mm approx. 0.591 in approx.	ø0.8 mm approx. ø0.031 in approx.																									
14 mm 0.551 in	30 mm approx. 1.181 in approx.	ø3.0 mm approx. ø0.118 in approx.																									

Note: Refer to **LIST OF FIBERS** (p.25~) for the ambient temperature of fibers to be used in combination.

FIBER OPTIONS


Others

Designation	Model No.	Description						
Protective tube for thru-beam type fiber	FTP-500 (0.5 m 1.640 ft)	For M4 thread	FT-42	FT-43	The protective tube, made of non-corrosive stainless steel, protects the inner fiber cable from any external forces.			
	FTP-1000 (1 m 3.281 ft)		FT-42S	FT-H13-FM2				
	FTP-1500 (1.5 m 4.921 ft)	For M3 thread	FT-42W					
	FTP-N500 (0.5 m 1.640 ft)		FT-31	FD-31				
	FTP-N1000 (1 m 3.281 ft)		FT-31S	FD-31W				
Protective tube for reflective type fiber	FTP-N1500 (1.5 m 4.921 ft)	For M6 thread	FT-31W					
	FDP-500 (0.5 m 1.640 ft)		FD-61	FD-62				
	FDP-1000 (1 m 3.281 ft)		FD-61S	FD-H13-FM2				
	FDP-1500 (1.5 m 4.921 ft)	For M4 thread	FD-61W					
	FDP-N500 (0.5 m 1.640 ft)		FD-41	FD-41S				
Universal sensor mounting stand	FDP-N1000 (1 m 3.281 ft)		FD-41W	FD-41SW				
	FDP-N1500 (1.5 m 4.921 ft)							
Universal sensor mounting stand	MS-AJ1-F	Horizontal mounting type		Mounting stand assembly for fiber (For M3, M4 or M6 threaded head fiber)				
	MS-AJ2-F	Vertical mounting type						
Liquid inflow prevention joint (Note)	MS-FX-01Y	Applicable fibers	FD-HF40Y	This joint suppresses false operations due to liquid slip-in from the top of the protective tube.				
Protective tube extension joint (Note)	MS-FX-02Y			The protective tube can be extended.				
Fiber mounting joint (Note)	MS-FX-03Y			The joint is used for mounting fibers on a tank.				
Single core holder	FX-AT15A	The incident light intensity may vary when using a multi-core fiber or a thin type sharp bending fiber. This holder suppresses the variation in the incident light intensity. (Brown)						
Reflector	RF-210	Used with FR-Z50HW.						
	RF-220	Refer to p.38 for the sensing range of FR-Z50HW to be used in combination.						
	RF-230							

Note: The joint internal ferrule (MS-FX-YF) is available as a spare part. A distorted ferrule may result in leakage.

Liquid inflow prevention joint

- MS-FX-01Y

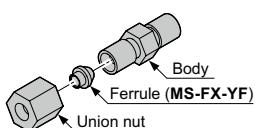


Reflector

- RF-210




Protective tube extension joint

- MS-FX-02Y

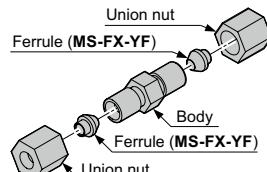

Fiber mounting joint

- MS-FX-03Y

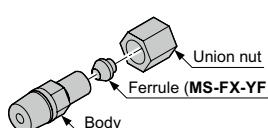

Protective tube


- FTP-□
- FDP-□




Universal sensor mounting stand

Using the arm which enables adjustment in the horizontal direction, sensing can also be done from above an assembly line.

- MS-AJ1-F

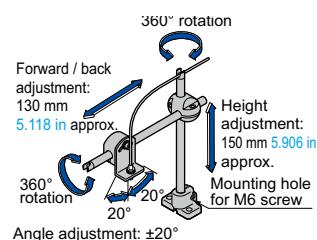

- MS-AJ2-F

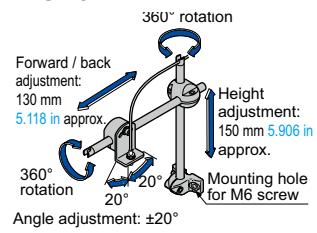

Single core holder

- FX-AT15A



FIBER OPTIONS


Model No. when ordering heat-resistant fibers individually as spare parts

- Heat-resistant side fiber
FT-H20-J20 (one pair set)
FT-H20-J30 (one pair set)
FT-H20-J50 (one pair set)
FT-H20-VJ50 (one pair set)
FT-H20-VJ80 (one pair set)
- Ordinary temperature side fiber
FT-42 (one pair set)

Model No. when ordering vacuum-resistant fibers individually as spare parts

- Vacuum-resistant fiber
FT-H30-M1V (one pair set)
FD-H30-KZ1V
FD-H30-L32V
- Photo-terminal
FV-BR1 (one pair set)
- Fiber at atmospheric side
FT-J8 (one pair set)

- Mouting bracket for **FD-KZ50V / FD-H30-KZ1V(-S)**
MS-FD-2



Model No. when ordering accessories additionally

- **RF-003** (Reflector for **FR-KZ50E/KZ50H**)
- **RF-13** (Reflective tape for **FR-Z50HW**)
- **FX-CT2** (Fiber cutter)
- **FX-CT3** (Fiber cutter for $\varnothing 1\text{mm } 0.039\text{ in} / \varnothing 1.3\text{mm } 0.051\text{ in}$
fiber cable / $\varnothing 4\text{mm } 0.157\text{ in}$ protective tube)
- **FX-CT4** (Fiber cutter for $\varnothing 2\text{mm } 0.079\text{ in}$ fiber cable /
 $\varnothing 4\text{mm } 0.157\text{ in}$ protective tube)
- **FX-AT2** (Attachment for fixed-length fiber, Orange)
- **FX-AT3** (Attachment for $\varnothing 2.2\text{ mm } 0.087\text{ in}$ fiber, Clear orange)
- **FX-AT4** (Attachment for $\varnothing 1\text{ mm } 0.039\text{ in}$ fiber, Black)
- **FX-AT5** (Attachment for $\varnothing 1.3\text{ mm } 0.051\text{ in}$ fiber, Gray)
- **FX-AT6** (Attachment for $\varnothing 1\text{ mm } 0.039\text{ in} / \varnothing 1.3\text{ mm } 0.051\text{ in}$ mixed fiber, Black / Gray)
- **FX-AT4G1** (Gland single for $\varnothing 1\text{ mm } 0.039\text{ in}$ fiber, Black)
- **FX-AT5G1** (Gland single for $\varnothing 1.3\text{ mm } 0.051\text{ in}$ fiber, Gray)
- **FX-AT6G1** (Gland single for $\varnothing 1\text{ mm } 0.039\text{ in} / \varnothing 1.3\text{ mm } 0.051\text{ in}$ mixed fiber, Black / Gray)
- **FX-SL1** (Slit mask for **FT-A11 / FT-A11W** (one pair set),
slit size: $0.5 \times 12\text{ mm } 0.020 \times 0.472\text{ in}$)
- **FX-SL2** (Slit mask for **FT-A11 / FT-A11W** (one pair set),
slit size: $1 \times 12\text{ mm } 0.039 \times 0.472\text{ in}$)
- **FX-SL3** (Slit mask for **FT-A32 / FT-A32W** (one pair set),
slit size: $0.5 \times 33\text{ mm } 0.020 \times 1.299\text{ in}$)
- **MS-FD-2** (Fiber mounting bracket)
- **MS-FD-F7-1** (SUS mounting bracket for **FD-F71**)
- **MS-FD-F7-2** (PVC mounting bracket for **FD-F71**)

- **RF-003**
- **RF-13**

- **FX-CT2**



- **FX-CT3**



- **FX-CT4**



- **FX-AT2**



- **FX-AT3**



- **FX-AT4**



- **FX-AT5**



- **FX-AT6**



- **FX-AT4G1**



- **FX-AT5G1**



- **FX-AT6G1**



- **FX-SL1**



- **FX-SL2**



- **FX-SL3**



- **MS-FD-2**




- **MS-FD-F7-1**

(SUS mounting bracket for **FD-F71**)



- **MS-FD-F7-2**

(PVC mounting bracket for **FD-F71**)



Disclaimer

The applications described in the catalog are all intended for examples only. The purchase of our products described in the catalog shall not be regarded as granting of a license to use our products in the described applications. We do NOT warrant that we have obtained some intellectual properties, such as patent rights, with respect to such applications, or that the described applications may not infringe any intellectual property rights, such as patent rights, of a third party.

Panasonic
INDUSTRY

Panasonic Industry Co., Ltd.
Industrial Device Business Division
7-1-1, Morofuku, Daito-shi, Osaka 574-0044, Japan
industry.panasonic.com