

# OPTIGA™ Authenticate NBT

## NFC I2C bridge tag for contactless device authentication and secured IoT device configuration

OPTIGA™ Authenticate NBT is a high-performance NFC I2C bridge tag for single-tap IoT device authentication and secured configuration. It enables ultra-fast, contactless NFC communication between IoT devices and contactless readers such as smartphones.


Certified as a Type 4 Tag by the NFC Forum, OPTIGA™ Authenticate NBT enables ultra-fast and seamless data exchange even with large data volumes. The powerful combination of a contactless interface speed of up to 848 Kbit/s and an I2C interface supporting up to 1 Mbit/s results in the highest performance levels – a key bonus for demanding applications.

This bridge tag provides high security thanks to our acclaimed Integrity Guard security architecture and EAL6+ certification for both the hardware and crypto libraries. It supports both symmetric and asymmetric cryptographic authentications as well as pass-through and asynchronous data transfer modes. These can be used for a variety of applications such as secured configuration of electronic devices without displays, activation of shared mobility vehicles, passive commissioning of non-powered smart bulbs prior to installation, and data logging on patient health monitors.

With a generous memory of 8 KB, this NFC I2C bridge tag offers ample space to store customer- and application-specific configuration information. High on-chip capacitance facilitates smaller antenna designs for an optimized BoM and tiny footprint. Customers can rely on us for long-term trustworthy sourcing plus support at every step of their project journey.

### Key features

- NFC Forum Type 4 Tag certified
- From 106 to 848 kbit/s data transfer rate for contactless interface
- I2C standard mode, fast mode, fast mode ‘plus’ clock frequencies
- Brand / device verification through ECDSA-based asymmetric cryptography, AES-128-based symmetric cryptography
- 32-bit password-based verification
- Storage capacity of 8 KB user NVM
- 78 pF high on-chip capacitance

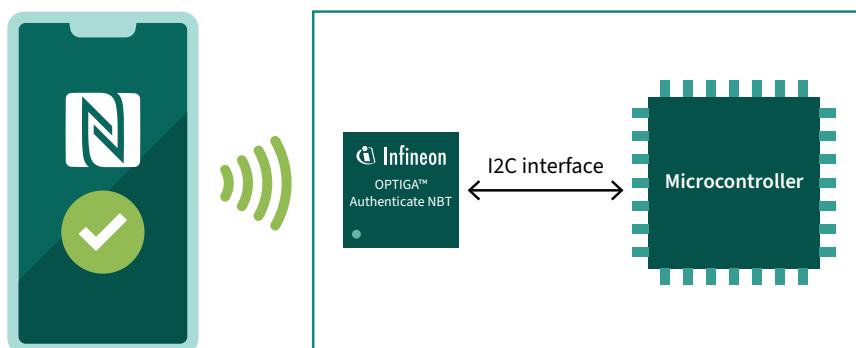

### Use Cases / Applications

- Secured activation and device configuration of IoT devices
- Activation of shared mobility vehicles
- Passive commissioning of non-powered smart devices
- Data logging in health monitors



## PRODUCT BRIEF

### Product summary

<b>Sales code</b>	<b>NBT2000A8K0T4</b>
<b>Product description</b>	NFC I2C bridge tag for contactless authentication and secured configuration of IoT devices
<b>Interfaces</b>	<ul style="list-style-type: none"><li>- I2C target interface compliant with Global Platform T = 1'</li><li>- NFC interface compliant with ISO/IEC 14443 Type A</li></ul>
<b>Communication modes</b>	<ul style="list-style-type: none"><li>- Pass-through: Synchronized communication over I2C and NFC interface through volatile buffer on OPTIGA™ Authenticate NBT</li><li>- Asynchronous Data Transfer: Mailbox style data transfer between reader and host MCU</li></ul>
<b>Security</b>	<ul style="list-style-type: none"><li>- ECDSA-based asymmetric cryptography (NIST P-256) one-way authentication with PKI (public key infrastructure)</li><li>- AES-128-based symmetric cryptography</li><li>- Flexible, per-file and per-interface based password protection using 32-bit passwords</li></ul>
<b>Memory</b>	8 KB user memory organized as NDEF message file of 4KB and four proprietary files of 1 KB each
<b>Data rate</b>	<ul style="list-style-type: none"><li>- From 106 to 848 kbit/s contactless</li><li>- I2C standard mode (100 kHz), fast mode (400 kHz), fast mode 'plus' (1 MHz) clock frequencies</li></ul>
<b>Ambient temperature</b>	Operating temperature range: -40°C to +85°C -40°C to +105°C for I2C communication only
<b>Input capacitance</b>	78 pF high on-chip capacitance to enable small antenna design and improved RF performance
<b>Delivery forms</b>	PG-USON-8-8 SMD packaging
<b>Other features</b>	<ul style="list-style-type: none"><li>- Pre-provisioned with Infineon's default device certificate</li><li>- NFC field detect pin</li></ul>

Published by  
Infineon Technologies AG  
Am Campeon 1-15, 85579 Neubiberg  
Germany

© 2024 Infineon Technologies AG.  
All rights reserved.

### Public

Document number:  
B189-I1429-V2-7600-EU-EC  
Date: 04/2024



Scan QR code and explore offering  
[www.infineon.com](http://www.infineon.com)

### Please note!

This Document is for information purposes only and any information given herein shall in no event be regarded as a warranty, guarantee or description of any functionality, conditions and/or quality of our products or any suitability for a particular purpose. With regard to the technical specifications of our products, we kindly ask you to refer to the relevant product data sheets provided by us. Our customers and their technical departments are required to evaluate the suitability of our products for the intended application.

We reserve the right to change this document and/or the information given herein at any time.

### Additional information

For further information on technologies, our products, the application of our products, delivery terms and conditions and/or prices, please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

### Warnings

Due to technical requirements, our products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by us in a written document signed by authorized representatives of Infineon Technologies, our products may not be used in any life-endangering applications, including but not limited to medical, nuclear, military, life-critical or any other applications where a failure of the product or any consequences of the use thereof can result in personal injury.