


2.4 GHz low pass filter matched to STM32WBA52, STM32WBA54, and STM32WBA55

Features



Chip scale package on glass 6 bumps

Pin-out top diagram (top view - bumps down)



- Integrated impedance matching to
 - STM32WBA52CxUx, STM32WBA54CxUx, and STM32WBA55CxUx in UFQFPN48 package
 - STM32WBA52KxUx, STM32WBA54KxUx, and STM32WBA55KxUx in UFQFPN32 package
- 50 Ω nominal impedance on antenna side
- Deep rejection harmonics filter
- Low insertion loss
- Small footprint
- Low profile ≤ 630 μm after reflow
- High RF performances
- RF BOM and area reduction
- ECOPACK2 compliant component

Applications

- Bluetooth 5
- OpenThread
- Zigbee®
- IEEE 802.15.4

Product status link

[MLPF-WB-04D3](#)

Description

The MLPF-WB-04D3 integrates an impedance matching network and harmonics filter. The matching impedance network has been tailored to maximize the RF performances of STM32WBA52, STM32WBA54, and STM32WBA55.

The MLPF-WB-04D3 uses STMicroelectronics IPD technology on non-conductive glass substrate which optimizes RF performances.

1 Characteristics

Table 1. Absolute ratings (T_{amb} = 25 °C)

Symbol	Parameter	Value	Unit
P _{IN}	Input power RF _{IN}	15	dBm
V _{ESD}	ESD ratings human body model (JESD22-A114-C), all I/O one at a time while others connected to GND	2000	V
T _{OP}	Operating temperature range	-40 to +105	°C

Table 2. Impedances (T_{amb} = 25 °C)

Symbol	Parameter	Value			Unit
		Min.	Typ.	Max.	
Z _{IN}	STM32WBA5xxxx single-ended impedance	-	Matched to STM32WBA5xxxx	-	Ω
Z _{OUT}	Antenna impedance	-	50	-	Ω

Table 3. Electrical characteristics and RF performances (T_{amb} = 25 °C)

Symbol	Parameter	Value			Unit
		Min.	Typ.	Max.	
f	Frequency range	2400		2500	MHz
IL	Insertion loss S ₂₁		1.0	1.2	dB
RL _{IN}	Input return loss S ₁₁	18	24		dB
RL _{OUT}	Output return loss S ₂₂	18	29		dB
Att	Harmonic rejection levels S ₂₁	Attenuation at 2fo (4800 – 5000) MHz	59	66	
		Attenuation at 3fo (7200 – 7500) MHz	56	61	
		Attenuation at 4fo (9600 – 10000) MHz	38	51	
		Attenuation at 5fo (12000 – 12500) MHz	38	40	

1.1 RF measurement

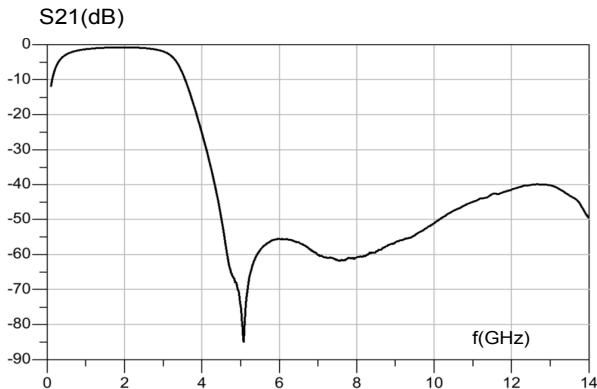
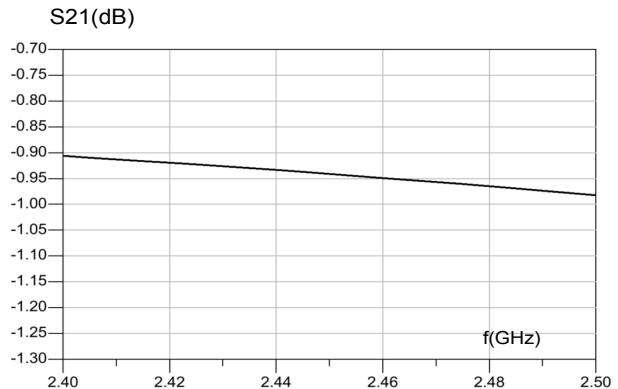
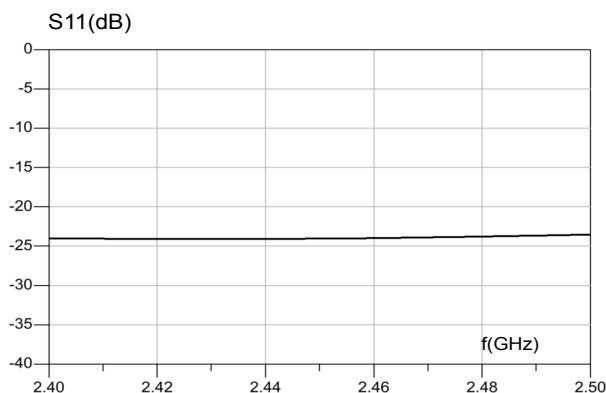
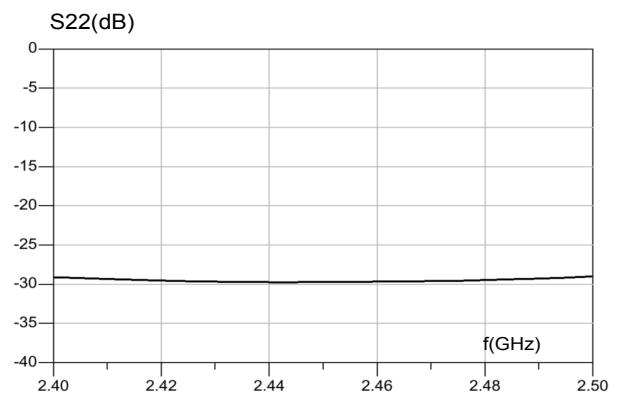
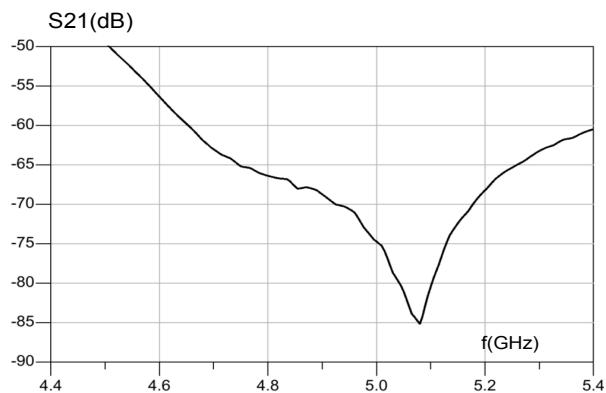
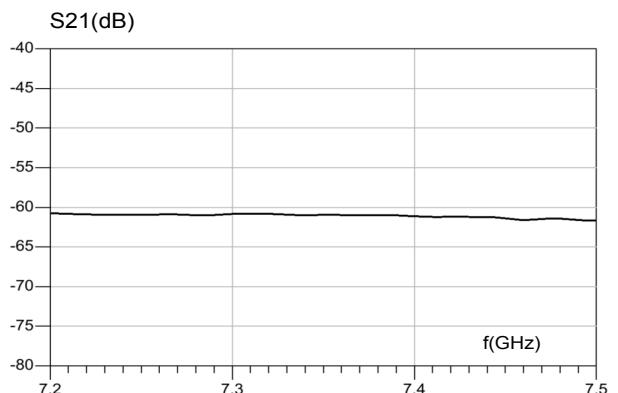
Figure 1. Transmission (dB)**Figure 2. Insertion loss (dB)****Figure 3. Input return loss (dB)****Figure 4. Output return loss (dB)****Figure 5. Attenuation 2f0 (dB)****Figure 6. Attenuation 3f0 (dB)**

Figure 7. Attenuation 4f0 (dB)


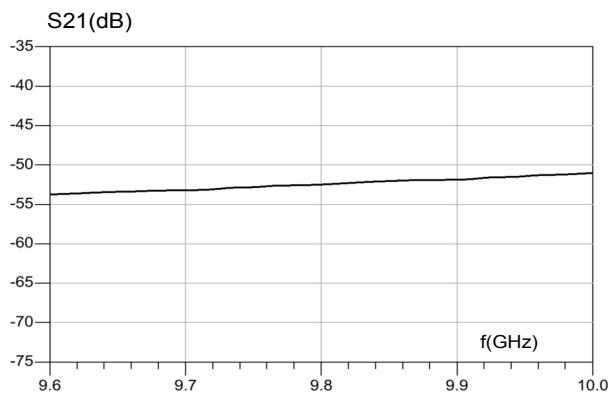


Figure 8. Attenuation 5f0 (dB)

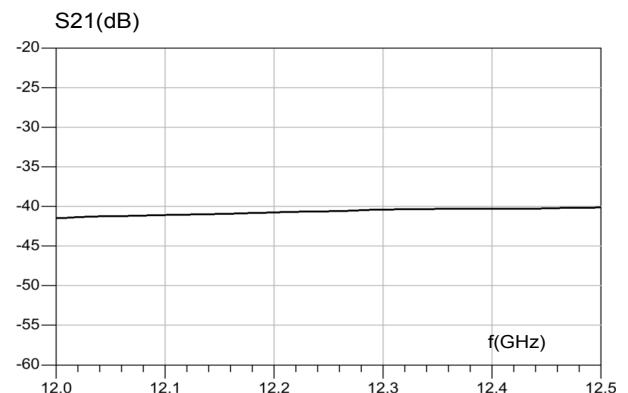

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

2.1 CSPG package information

Figure 9. CSPG package outline (bottom view - bumps up)

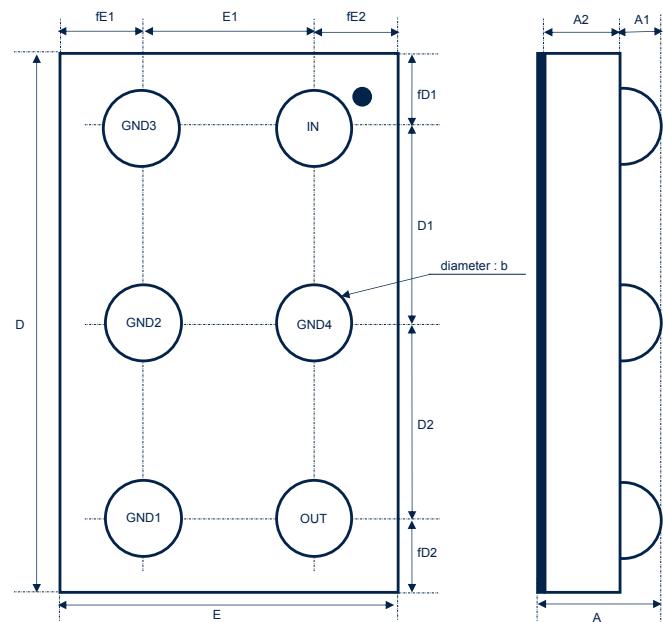



Table 4. CSPG 6 bumps mechanical data

Ref.	Dimensions		
	Millimeters		
	Min.	Typ.	Max.
A	0.580	0.630	0.680
A1	0.180	0.205	0.230
A2	0.380	0.400	0.420
b	0.230	0.255	0.280
D	1.550	1.600	1.650
D1		0.577	
D2		0.577	
E	0.950	1.000	1.050
E1		0.500	
fD1		0.223	
fD2		0.223	
fE1		0.250	
fE2		0.250	

Figure 10. Marking

Dot, ST logo
 ECOPACK® Grade
 xx = marking
 z = manufacturing location
 yww = datecode
 (y = year
 ww = week)


Figure 11. Top view

Table 5. Pad description top view (pads down)

Pad ref	Pad name	Description
A1	IN	STM32WBA5xxxx
A2	GND4	Ground
A3	OUT	Antenna
B1	GND3	Ground
B2	GND2	Ground
B3	GND1	Ground


Figure 12. Tape and reel outline


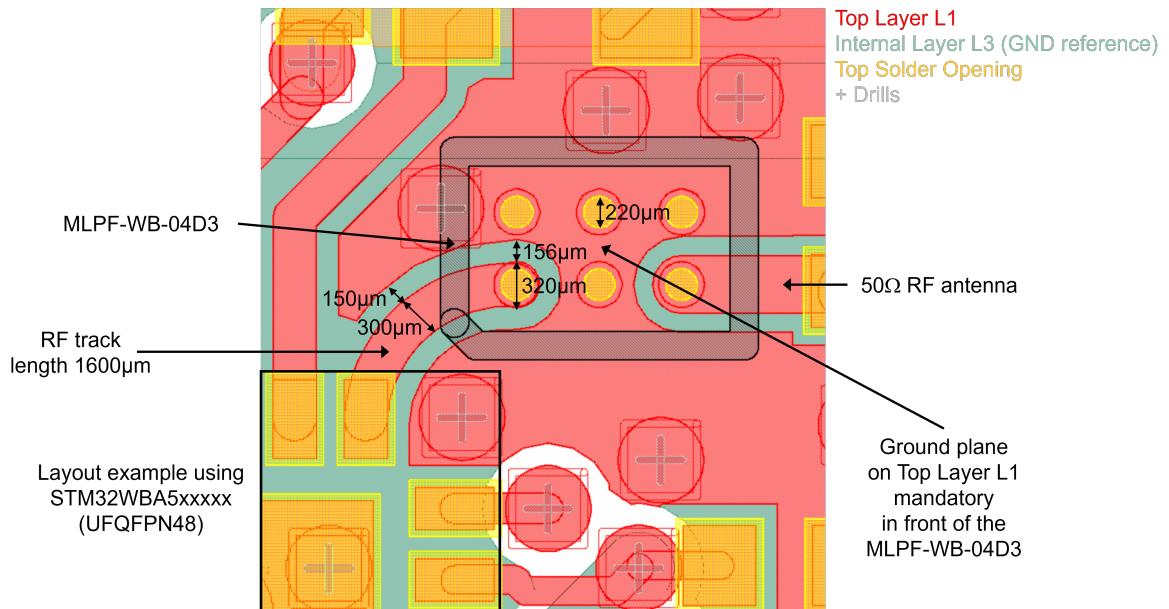
Table 6. Tape and reel mechanical data

Ref	Dimensions		
	Millimeters		
	Min	Typ	Max
A0	1.06	1.09	1.12
B0	1.66	1.69	1.72
D0	1.40	1.50	1.60
F	3.45	3.50	3.55
K0	0.69	0.72	0.75
P0	3.90	4.00	4.10
P1	1.95	2.00	2.05
P2	1.95	2.00	2.05
W	7.90	8.00	8.30

3 Recommendation on PCB assembly

3.1 Land pattern

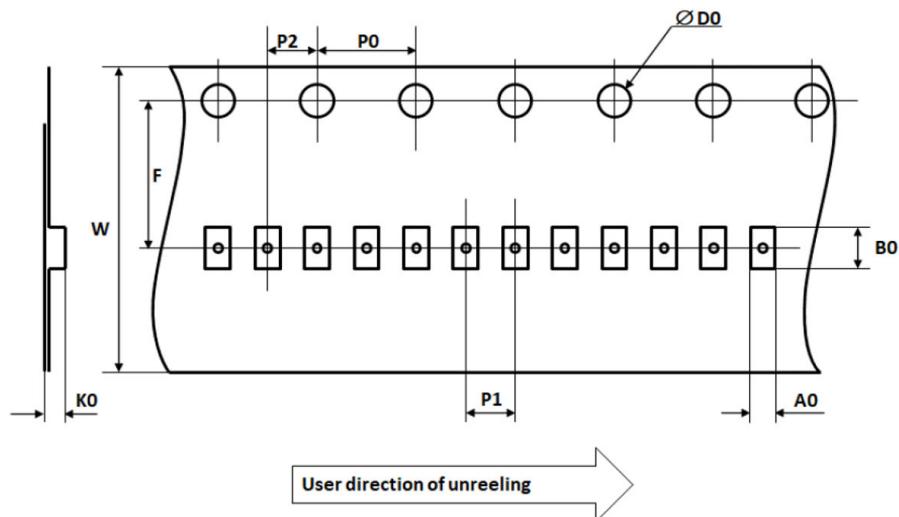Figure 13. PCB land pattern recommendations



The RF transmission line between MLPF and antenna is dimensioned to 50 ohms characteristic impedance.
 The RF transmission line between STM32 and MLPF is dimensioned to 63 ohms characteristic impedance.
 These transmission line characteristics impedances have to be followed as close as possible.
 Moreover, lines physical dimensions will have to be tuned according to specific PCB stack up, if different from the one presented in datasheet, to keep expected characteristic impedance values.
 The ground plane on top layer is mandatory in front of the MLPF-WB-04D3, with shape and definition generating the best possible equipotentiality.
 The drills density needs to be maximized near the MLPF-WB-04D3 area to ensure optimal RF performances.

Figure 14. PCB stack-up recommendations


Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	0,70mil	4.2	
1	Top Layer		1,60mil		
	Dielectric 1	FR-4	3,00mil	3.7	
2	Internal 1		1,20mil		
	Dielectric 3		50,00mil	4.5	
3	Internal 2		1,20mil		
	Dielectric 2		3,00mil	3.7	
4	Bottom Layer		1,60mil		
	Bottom Solder	Solder Resist	0,70mil	4.2	
	Bottom Overlay				

Symbol	Count	Hole Size	Plated	Hole Type	Drill Layer Pair	Via/Pad	Pad Shape	Template	Description
□	616	11,81mil (0,30mm)	PTH	Round	Top Layer - Bottom Layer	Via	Rounded	(Mixed)	c0hn100m105p-1
○	2	39,37mil (1,00mm)	NPTH	Round	Top Layer - Bottom Layer	Pad	Rounded		
	618 Total								

Note: The thickness and constant are provided as a reference. It is recommended to make them as close as possible to the PCB stack-up recommendations.

3.2 Stencil opening design

Figure 15. Footprint - 3 mils stencil - solder mask defined

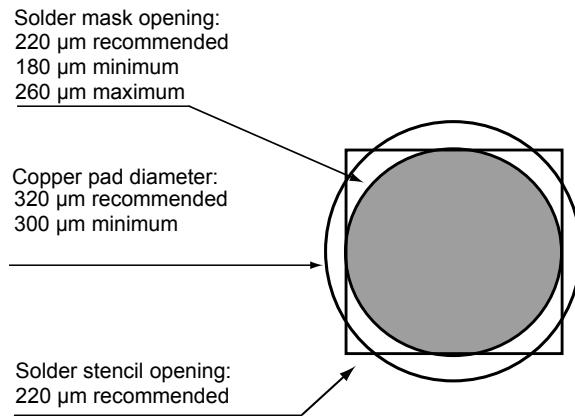

3.3 Solder paste

1. Halide-free flux qualification ROL0 according to ANSI/J-STD-004.
2. "No clean" solder paste is recommended.
3. Offers a high tack force to resist component movement during high speed.
4. Use solder paste with fine particles: powder particle size 20-38 μm .

3.4 Placement


1. Manual positioning is not recommended.
2. It is recommended to use the lead recognition capabilities of the placement system, not the outline centering.
3. Standard tolerance of ± 0.05 mm is recommended.
4. 1.0 N placement force is recommended. Too much placement force can lead to squeezed out solder paste and cause solder joints to short. Too low placement force can lead to insufficient contact between package and solder paste that could cause open solder joints or badly centered packages.
5. To improve the package placement accuracy, a bottom side optical control should be performed with a high resolution tool.
6. For assembly, a perfect supporting of the PCB (all the more on flexible PCB) is recommended during solder paste printing, pick and place and reflow soldering by using optimized tools.

3.5 PCB design preference

1. To control the solder paste amount, the closed via is recommended instead of open vias.
2. The position of tracks and open vias in the solder area should be well balanced. A symmetrical layout is recommended, to avoid any tilt phenomena caused by asymmetrical solder paste due to solder flow away.

3.6 Reflow profile

Figure 16. ST ECOPACK recommended soldering reflow profile for PCB mounting

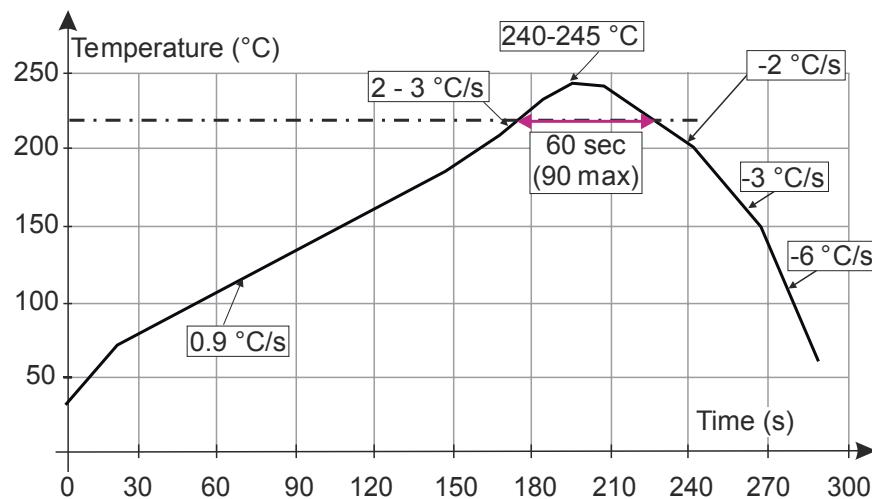

Note: Minimize air convection currents in the reflow oven to avoid component movement.

Note: More information is available in the application note:

- [AN2348 Flip-Chip: "Package description and recommendations for use"](#)

4 Ordering information

Table 7. Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
MLPF-WB-04D3	UE	CSPG	1.82 mg	5000	Tape and reel

Revision history

Table 8. Document revision history

Date	Revision	Changes
21-Sep-2023	1	Initial release.
25-Oct-2023	2	Updated Figure 15 .
25-Jan-2024	3	Inserted two STM32 product, STM32WBA54 and STM32WBA55. Minor text changes in Section 3.1 .

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2024 STMicroelectronics – All rights reserved