




Cable Tie Mounts – Screw Applied

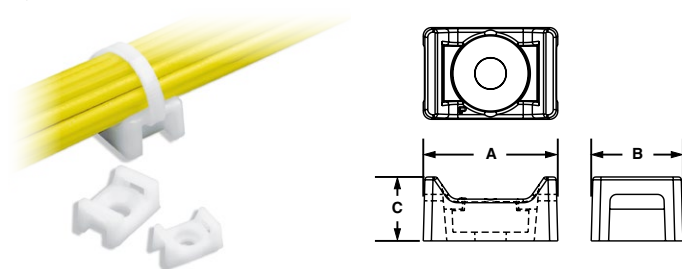

- UL 62275 Type 2, 21 per UL file E136577
- Unique cradle design provides maximum stability for the cable bundles
- Low profile design keeps bundle close to mounting surface


BEST SELLER

BEST SELLER

BEST SELLER

Part Number	Compatible Cross-Section Cable Ties‡	Length (A) In. (mm)	Width (B) In. (mm)	Height (C) In. (mm)	Material	Color	Screw Size	Suitable Environment	Std. Pkg. Qty.	
TM1S6-C	M	.51 (13.0)	.32 (8.0)	.23 (5.8)	Nylon 6.6	Natural	#6 (M3)	Indoor	100	
TM2S6-C	M, I, S	.63 (16.0)	.43 (10.8)	.28 (7.0)		Weather Resistant Nylon 6.6	Black	#8 (M4)		Outdoor
TM2S8-C										Indoor
TM2S8-C0					Nylon 6.6	Natural	Outdoor			
TM3S8-C	M, I, S, LH	.86 (21.9)	.61 (15.5)	.37 (9.4)	Weather Resistant Nylon 6.6	Black	Outdoor	1000		
TM3S8-C0					Nylon 6.6	Natural	Indoor			
TM3S10-C						Black	Outdoor			
TM3S10-C0	M, I, S, LH	.86 (21.9)	.61 (15.5)	.37 (9.4)		Nylon 6.6	Natural		Indoor	1000
TM3S10-M	M, I, S, LH	.86 (21.9)	.61 (15.5)	.37 (9.4)	Black		Outdoor			
TM3S25-C	M, I, S, LH	.88 (22.3)	.63 (16.0)	.38 (9.6)	Weather Resistant Nylon 6.6	Black	1/4 (M6) screw	Indoor	100	
TM3S25-C0							Outdoor			

‡Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, LH = Light-Heavy.

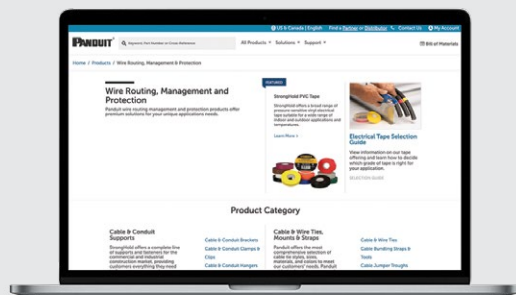

Like what you see? Want more?

Visit www.panduit.com for the full offering of Panduit products